










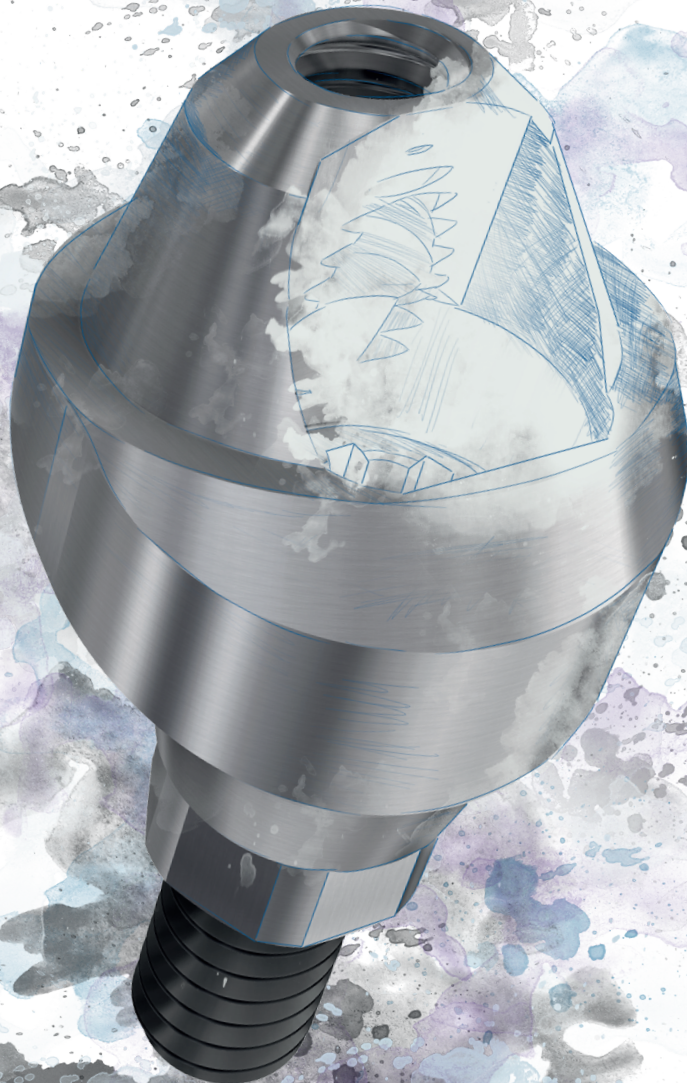











DESS


> DENTAL SMART SOLUTIONS



Catalogue 2023

PRODUCT LIST

| | | | | | |
|--|---|----|---|---|----|
|  | NOBELACTIVE® & NOBELREPLACE® CC ACTIVE HEX | 04 |  | ZIMMER SCREW-VENT® INTERNAL HEX USA | 54 |
|  | NOBEL REPLACE SELECT™ TRI-LOBE | 10 |  | ASTRA TECH IMPLANT SYSTEM™ EV CONIC EVO | 60 |
|  | NOBEL BRÅNEMARK® EXTERNAL HEX UNIVERSAL | 16 |  | ASTRA TECH OSSEOSPEED™ INTERNAL HEX CONIC | 66 |
|  | 3i OSSEOTITE® EXTERNAL HEX USA | 22 |  | DENTSPLY FRIADENT XIVE® INTERNAL HEX FD | 72 |
|  | 3i CERTAIN® INTERNAL HEX "CLICK" | 28 |  | DENTSPLY ANKYLOS® C/X INTERNAL ANK | 78 |
|  | STRAUMANN® SOFT TISSUE LEVEL & synOcta® OCTAGON | 34 |  | OSSTEM® TS CONIC OSS | 82 |
|  | STRAUMANN® BONE LEVEL CONICAL BL | 40 |  | CAMLOG® INTERNAL CAM | 86 |
|  | STRAUMANN® BLX CONICAL BLX | 46 |  | CONELOG® INTERNAL CON | 90 |
|  | NEODENT® GRAND MORSE NEO GM | 50 |  | BIOHORIZONS® INTERNAL INTERNAL HEX BH | 94 |

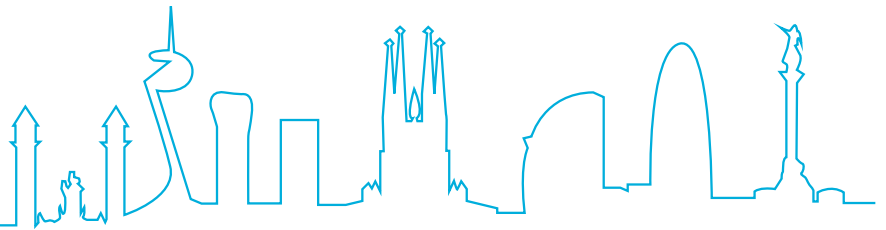


BIOHORIZONS[®]
EXTERNAL
EXTERNAL HEX BH

98




MIS[®] SEVEN
INTERNAL HEX MI

102



MIS[®] C1
CONIC MC

108



MIS[®] V3
CONIC MV

110



MEGAGEN
AnyRidge[®]
CONIC ANYR

112



ANTHOGYR AXIOM[®]
CONIC AXIO

116



MEDENTIS ICX[®]
CONIC IC

118




GLOBALD IN-KONE[®]
CONIC INK

122




DENTIUM
SUPERLINE[™] &
IMPLANTIUM[®]
CONIC DENT

124



BEGO SEMADOS[®]
INTERNAL SEM

128



BIOTECH KONTACT[®]
CONIC BIO

130




BTI[®]
INTERNAL BT

132



PHIBO[®] TSH[®]
EXTERNAL HEX PH

134




MULTI-UNIT
CONNECTION

136




DESSLoc[®]

140




HOLDERS &
BLOCKS

144




TOOLS

146



CLINICAL SCREWS
RECOMMENDED
TORQUE

150



ACTIVE HEX

○ non-engaging

⬡ engaging

compatible with


NobelActive® / Replace® CC



| HEALING ABUTMENT | 3.0 | NP | RP | WP |
|-----------------------|-----------|----------|----------|-----------|
| | 3.0 | 3.5 | 4.3/5.0 | 5.5 |
| GH 3,0mm ^A | 20.068/3* | 20.039/3 | 20.040/3 | 20.069/3* |
| GH 3,0mm ^B | | 20.047/3 | 20.048/3 | 20.070/3* |
| GH 4,0mm ^A | 20.068/4* | 20.039/4 | 20.040/4 | 20.069/4* |
| GH 4,0mm ^B | | 20.047/4 | 20.048/4 | 20.070/4* |
| GH 5,0mm ^A | 20.068/5* | 20.039/5 | 20.040/5 | 20.069/5* |
| GH 5,0mm ^B | | 20.047/5 | 20.048/5 | 20.070/5* |

^A for single crown restoration

^B for bridges and structures restoration



SCAN ABUTMENTS

| | | | | |
|--|------------|------------|------------|------------|
| | 50.068 | 50.041 | 50.042 | 50.069 |
| | 52.068 | 52.041 | 52.042 | 52.069 |
| | 53.100-P10 | 53.100-P10 | 53.100-P10 | 53.100-P10 |
| | 53.200-P10 | 53.200-P10 | 53.200-P10 | 53.200-P10 |




52.xxx includes manual tool DTPEIPEEK.



TRANSFER

| | | | |
|--------|--------|--------|--------|
| 17.068 | 17.044 | 17.045 | 17.069 |
|--------|--------|--------|--------|

Transfers include two screws (for open and closed tray).

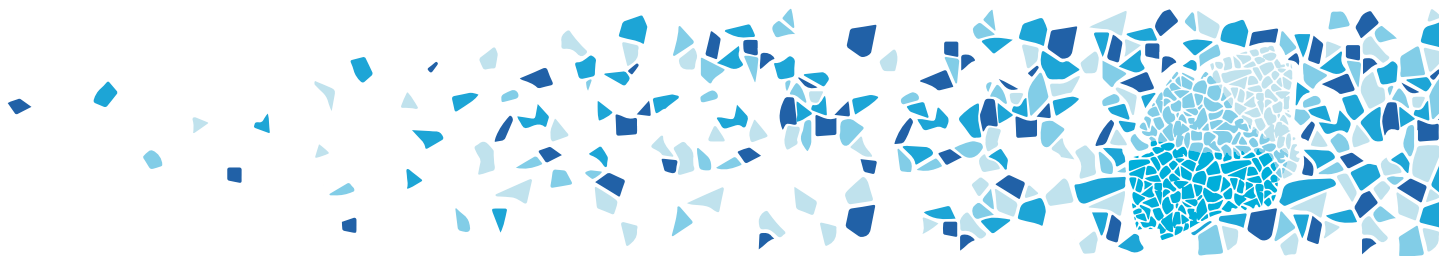

DIGITAL ANALOGUE



Platform Colour Coded

Retention screw Hex 1,27 mm*

*Other retention screws available, see page 59

| | 3.0 | NP | RP | WP |
|--|----------|----------|----------|----------|
| | 3.0 | 3.5 | 4.3/5.0 | 5.5 |
| | 14.068/D | 14.041/D | 14.042/D | 14.069/D |



ANALOGUE



Platform Colour Coded

10 Pack.

| | | | | |
|--|--------|------------|------------|------------|
| | 14.068 | 14.041 | 14.042 | 14.069 |
| | | 14.041-P10 | 14.042-P10 | 14.069-P10 |



TEMPORARY ABUTMENT



24.041 24.042



25.041 25.042



DESSLoc®

| | | |
|----------|----------|----------|
| GH 1,0mm | 88.039/1 | 88.040/1 |
| GH 2,0mm | 88.039/2 | 88.040/2 |
| GH 3,0mm | 88.039/3 | 88.040/3 |
| GH 4,0mm | 88.039/4 | 88.040/4 |



MULTI-UNIT ABUTMENTS

3.0

NP

RP

WP

3.0

3.5

4.3/5.0









5.5

| | | | | |
|----------|-----|--|----------|----------|
| GH 1,5mm | 0° | | 40.007/1 | 40.008/1 |
| GH 2,5mm | 0° | | 40.007/2 | 40.008/2 |
| GH 3,5mm | 0° | | 40.007/3 | 40.008/3 |
| GH 4,5mm | 0° | | | 40.008/4 |
| GH 2,5mm | 17° | | 41.707/2 | 41.708/2 |
| GH 3,5mm | 17° | | 41.707/3 | 41.708/3 |
| GH 3,5mm | 30° | | 43.007/3 | 43.008/3 |
| GH 4,5mm | 30° | | 43.007/4 | 43.008/4 |

4.8
MULTI-UNIT PLATFORM



TI-BASE




| | | | | |
|----------|---|--------|----------|----------|
| GH 1,2mm |  | | 15.041 | 15.042 |
| GH 1,5mm |  | 15.068 | | 15.069 |
| GH 2,0mm |  | | 15.041/2 | 15.042/2 |
| GH 3,0mm |  | | 15.341 | 15.342 |
| GH 1,2mm |  | | 16.041 | 16.042 |
| GH 1,5mm |  | 16.068 | | 16.069 |
| GH 2,0mm |  | | 16.041/2 | 16.042/2 |
| GH 3,0mm |  | | 16.341 | 16.342 |

TI-BASE CASTABLES



| | | | | | |
|---------|---|-----------|-----------|-----------|-----------|
| 5 Pack. |  | 32.001-P5 | 32.001-P5 | 32.001-P5 | 32.001-P5 |
| 5 Pack. |  | 33.001-P5 | 33.001-P5 | 33.001-P5 | 33.001-P5 |



AURUMBase®

3.0

NP

RP

WP

3.0

3.5

4.3/5.0

5.5



36.041

36.042



37.041

37.042

PLASTIC SLEEVES FOR AURUMBase®



5 Pack.

0°

33.100-P5

33.100-P5

5 Pack.

10°

33.101-P5

33.101-P5

5 Pack.

20°

33.102-P5

33.102-P5



A



B

ELLIPTIBase®

A corner



56.068

B flat



57.068



C-Base®

GH 0,8mm



58.041

58.042

GH 3,0mm



58.041/3

58.042/3

GH 0,8mm



59.041

59.042

GH 3,0mm



59.041/3

59.042/3

Includes screw, same as standard screw.

Libraries available for EXOCAD & 3Shape.

Torx® Screw
AURUMBase® & ELLIPTIBase®



(replacement screw)

19.468

19.441

19.442

Recommended torque

15 Ncm

15 Ncm

15 Ncm

Torx® BALL SCREWDRIVER

20mm

24mm

30mm

35mm



DT20TB06

DT24TB06

DT30TB06

DT35TB06



| ABUTMENTS | 3.0 | NP | RP | WP |
|-----------|-----|---------|---------|-----|
| | 3.0 | 3.5 | 4.3/5.0 | 5.5 |
| 0° | | 13.041 | 13.042 | |
| 15° | | 22.041* | 22.042* | |
| 25° | | | 23.042* | |




| SCREW UG | 3.0 | NP | RP | WP |
|---------------------------|---------------|---------------|---------------|---------------|
| | 19.068 | 19.027 | 19.030 | 19.030 |
| 10 Pack. | | 19.027-P10 | 19.030-P10 | 19.030-P10 |
| DLC | 19.268* | 19.227 | 19.230 | 19.230 |
| TIN | 19.668* | 19.627* | 19.630* | 19.630* |
| <i>Recommended torque</i> | <i>15 Ncm</i> | <i>35 Ncm</i> | <i>35 Ncm</i> | <i>35 Ncm</i> |





| PRE-MILLED BLANK | | 3.0 | NP | RP | WP |
|------------------|------|--------|--------|--------|--------|
| Ø 10mm | Ti | 61.068 | 61.041 | 61.042 | 61.069 |
| Ø 14mm | Ti | | 62.041 | 62.042 | 62.069 |
| Ø 14mm | CoCr | | 71.041 | 71.042 | 71.069 |



| CoCr BASE | | 3.0 | NP | RP | WP |
|---|--|-----|--------|--------|----|
|  | | | 30.041 | 30.042 | |
|  | | | 31.041 | 31.042 | |



| CASTABLE | | 3.0 | NP | RP | WP |
|---|--|-----|------------|------------|----|
|  | | | 28.041 | 28.042 | |
| | | | 11.041-P10 | 11.042-P10 | |
|  | | | 29.041 | 29.042 | |
| | | | 12.041-P10 | 12.042-P10 | |

“Staying true to our history and values empowers our brand”

Since our beginnings, quality has been quintessential to our philosophy and is reflected in every product that we manufacture. Our choice of the best Swiss and Japanese milling machines allow us to create the most precise parts. Our quality standards entail measuring to within a few microns of precision.





TRI-LOBE

compatible with
NobelReplace Select™


○ non-engaging

◡ engaging




HEALING ABUTMENT

| | NP | RP | WP | 6.0 |
|----------|----------|----------|----------|-----|
| | NP/3.5 | RP/4.3 | WP/5.0 | 6.0 |
| GH 3,0mm | 20.004/3 | 20.005/3 | 20.006/3 | |
| GH 4,0mm | 20.004/4 | 20.005/4 | 20.006/4 | |
| GH 5,0mm | 20.004/5 | 20.005/5 | 20.006/5 | |



SCAN ABUTMENTS

| | | | | | |
|--|------------|------------|------------|------------|------------|
| | | 50.004 | 50.005 | 50.006 | 50.097 |
| | | 52.004 | 52.005 | 52.006 | 52.097 |
| | 10 Pack. ○ | 53.100-P10 | 53.100-P10 | 53.100-P10 | 53.100-P10 |
| | 10 Pack. ◡ | 53.200-P10 | 53.200-P10 | 53.200-P10 | 53.200-P10 |



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

| | | | | |
|--|--------|--------|--------|--------|
| | 17.004 | 17.005 | 17.006 | 17.097 |
|--|--------|--------|--------|--------|

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE



Platform Colour Coded

| | | | | |
|------------------------------|----------|----------|----------|----------|
| Retention screw Hex 1,27 mm* | 14.004/D | 14.005/D | 14.006/D | 14.097/D |
|------------------------------|----------|----------|----------|----------|

*Other retention screws available, see page 59



ANALOGUE

| | NP | RP | WP | 6.0 |
|----------|------------|------------|--------|--------|
| | NP/3.5 | RP/4.3 | WP/5.0 | 6.0 |
| | 14.004 | 14.005 | 14.006 | 14.097 |
| 10 Pack. | 14.004-P10 | 14.005-P10 | | |



TEMPORARY ABUTMENT

| | | | |
|---|--------|--------|--------|
| ○ | 24.004 | 24.005 | 24.006 |
| △ | 25.004 | 25.005 | 25.006 |



DESSLoc®

| | | |
|----------|----------|----------|
| GH 1,0mm | 88.004/1 | 88.005/1 |
| GH 2,0mm | 88.004/2 | 88.005/2 |
| GH 3,0mm | 88.004/3 | 88.005/3 |
| GH 4,0mm | 88.004/4 | 88.005/4 |



| MULTI-UNIT ABUTMENTS | | | | NP | RP | WP | 6.0 |
|----------------------|-----|---|-----------|------------|----------|--------|-----|
| | | | | NP/3.5 | RP/4.3 | WP/5.0 | 6.0 |
| GH 1,0mm | 0° | ○ | 40.004/1 | 40.005/1 | 40.006/1 | | |
| GH 2,0mm | 0° | ○ | 40.004/2 | 40.005/2 | 40.006/2 | | |
| GH 3,0mm | 0° | ○ | 40.004/3 | 40.005/3 | 40.006/3 | | |
| GH 4,0mm | 0° | ○ | | 40.005/4 | | | |
| GH 5,0mm | 0° | ○ | | 40.005/5 | | | |
| GH 2,0mm | 17° | ◁ | 41.704/2* | 41.705/2* | | | |
| GH 3,0mm | 17° | ◁ | 41.704/3* | 41.705/3* | | | |
| GH 4,0mm | 17° | ◁ | | 41.705/4* | | | |
| GH 4,0mm | 30° | ◁ | | 43.005/4* | | | |
| GH 5,0mm | 30° | ◁ | | 43.005/5* | | | |
| GH 5,0mm | 30° | ○ | | 43.005/5R* | | | |


4.8
MULTI-UNIT PLATFORM



| TI-BASE | | | | | | |
|----------|--|---|--------|--------|--------|--------|
| GH 0,3mm | | ○ | 15.004 | 15.005 | 15.006 | 15.097 |
| GH 1,5mm | | ○ | 15.204 | 15.205 | 15.206 | |
| GH 3,0mm | | ○ | 15.304 | 15.305 | 15.306 | |
| GH 0,3mm | | ◁ | 16.004 | 16.005 | 16.006 | 16.097 |
| GH 1,5mm | | ◁ | 16.204 | 16.205 | 16.206 | |
| GH 3,0mm | | ◁ | 16.304 | 16.305 | 16.306 | |



| TI-BASE CASTABLES | | | | | | |
|-------------------|--|---|-----------|-----------|-----------|-----------|
| 5 Pack. | | ○ | 32.001-P5 | 32.001-P5 | 32.001-P5 | 32.001-P5 |
| 5 Pack. | | ◁ | 33.001-P5 | 33.001-P5 | 33.001-P5 | 33.001-P5 |




| | | NP | RP | WP | 6.0 |
|-------------------|---|--------|--------|--------|-----|
| AURUMBase® | | NP/3.5 | RP/4.3 | WP/5.0 | 6.0 |
| | ○ | 36.004 | 36.005 | 36.006 | |
| | ◁ | 37.004 | 37.005 | 37.006 | |

PLASTIC SLEEVES FOR AURUMBase®



| | | | | |
|---------|-----|-----------|-----------|-----------|
| 5 Pack. | 0° | 33.100-P5 | 33.100-P5 | 33.100-P5 |
| 5 Pack. | 10° | 33.101-P5 | 33.101-P5 | 33.101-P5 |
| 5 Pack. | 20° | 33.102-P5 | 33.102-P5 | 33.102-P5 |



| | | C-Base® | | | |
|----------|---|----------------|----------|----------|--------|
| GH 0,4mm | ○ | 58.004 | | 58.006 | 58.097 |
| GH 0,5mm | ○ | | 58.005 | | |
| GH 1,5mm | ○ | 58.004/2 | 58.005/2 | 58.006/2 | |
| GH 3,0mm | ○ | 58.004/3 | 58.005/3 | 58.006/3 | |
| GH 0,4mm | ◁ | 59.004 | | 59.006 | 59.097 |
| GH 0,5mm | ◁ | | 59.005 | | |
| GH 1,5mm | ◁ | 59.004/2 | 59.005/2 | 59.006/2 | |
| GH 3,0mm | ◁ | 59.004/3 | 59.005/3 | 59.006/3 | |

Includes screw, same as standard screw.

Libraries available for EXOCAD & 3Shape.



| Torx® Screw AURUMBase® | | | | |
|-------------------------------|--|--------|--------|--------|
| (replacement screw) | | 19.404 | 19.405 | 19.405 |
| Recommended torque | | 35 Ncm | 35 Ncm | 35 Ncm |



| Torx® BALL SCREWDRIVER | 20mm | 24mm | 30mm | 35mm |
|-------------------------------|----------|----------|----------|----------|
| | DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |



| ABUTMENTS | NP | RP | WP | 6.0 |
|-----------|---------|---------|---------|-----|
| | NP/3.5 | RP/4.3 | WP/5.0 | 6.0 |
| 0° | 13.004 | 13.005 | 13.006 | |
| 15° | 22.004* | 22.005* | 22.006* | |
| 25° | | 23.005* | | |



| SCREW UG | NP | RP | WP | 6.0 |
|---------------------------|---------------|---------------|---------------|---------------|
| | 19.004 | 19.005 | 19.005 | 19.005 |
| 10 Pack. | 19.004-P10 | 19.005-P10 | 19.005-P10 | 19.005-P10 |
| DLC | 19.204 | 19.205 | 19.205 | 19.205 |
| TIN | 19.604* | 19.605* | 19.605* | 19.605* |
| <i>Recommended torque</i> | <i>35 Ncm</i> | <i>35 Ncm</i> | <i>35 Ncm</i> | <i>35 Ncm</i> |



| PRE-MILLED BLANK | | NP | RP | WP | 6.0 |
|------------------|------|--------|--------|--------|--------|
| Ø 10mm | Ti | 61.004 | 61.005 | 61.006 | 61.097 |
| Ø 14mm | Ti | | 62.005 | 62.006 | 62.097 |
| Ø 14mm | CoCr | 71.004 | 71.005 | 71.006 | 71.097 |



| CoCr BASE | | NP | RP | WP | 6.0 |
|-----------|---|--------|--------|--------|-----|
| | ○ | 30.004 | 30.005 | 30.006 | |
| | ◁ | 31.004 | 31.005 | 31.006 | |



| CASTABLE | | NP | RP | WP | 6.0 |
|----------|---|------------|------------|--------|-----|
| | ○ | 28.004 | 28.005 | 28.006 | |
| 10 Pack. | | 11.004-P10 | 11.005-P10 | | |
| | ◁ | 29.004 | 29.005 | 29.006 | |
| 10 Pack. | | 12.004-P10 | 12.005-P10 | | |

“Great things are done by a series of small things brought together”

A business without quality will not last. Terrats Medical is in its third generation and we want to honour our heritage with the highest requirements for quality in all we do.





EXTERNAL HEX UNIVERSAL

○ non-engaging


⬡ engaging

compatible with
Nobel Brånemark®



HEALING ABUTMENT

| | NP | RP | WP |
|----------|----------|----------|----------|
| | NP/3.5 | RP/4.1 | WP/5.1 |
| GH 3,0mm | 20.001/3 | 20.002/3 | 20.003/3 |
| GH 4,0mm | 20.001/4 | 20.002/4 | 20.003/4 |
| GH 5,0mm | 20.001/5 | 20.002/5 | 20.003/5 |



SCAN ABUTMENTS

| | | | | |
|--|------------|------------|------------|------------|
| | | 50.001 | 50.002 | 50.003 |
| | | 52.001 | 52.002 | 52.003 |
| | 10 Pack. ○ | 53.100-P10 | 53.100-P10 | 53.100-P10 |
| | 10 Pack. ⬡ | 53.200-P10 | 53.200-P10 | 53.200-P10 |



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

| | | | |
|--|--------|--------|--------|
| | 17.041 | 17.042 | 17.043 |
|--|--------|--------|--------|

Transfers include two screws (for open and closed tray).



**DIGITAL
ANALOGUE**



Platform Colour Coded

Retention screw Hex 1,27 mm*

*Other retention screws available, see page 59

| NP | RP | WP |
|----------|----------|----------|
| NP/3.5 | RP/4.1 | WP/5.1 |
| 14.001/D | 14.002/D | 14.003/D |



ANALOGUE



Platform Colour Coded

10 Pack.


| | | |
|--------|------------|--------|
| 14.001 | 14.002 | 14.003 |
| | 14.002-P10 | |



**TEMPORARY
ABUTMENT**

| | | | |
|---|--------|--------|--------|
| ○ | 24.001 | 24.002 | 24.003 |
| ⬡ | 25.001 | 25.002 | 25.003 |











DESSLoc®



| | | |
|----------|----------|----------|
| GH 1,0mm | 88.001/1 | 88.002/1 |
| GH 2,0mm | 88.001/2 | 88.002/2 |
| GH 3,0mm | 88.001/3 | 88.002/3 |
| GH 4,0mm | | 88.002/4 |
| GH 5,0mm | | 88.002/5 |









MULTI-UNIT ABUTMENTS

| | | | NP | RP | WP |
|----------|-----|---|-----------|-----------|----------|
| | | | NP/3.5 | RP/4.1 | WP/5.1 |
| GH 1,0mm | 0° |  | 40.001/1 | 40.002/1 | 40.003/1 |
| GH 2,0mm | 0° |  | 40.001/2 | 40.002/2 | 40.003/2 |
| GH 3,0mm | 0° |  | 40.001/3 | 40.002/3 | 40.003/3 |
| GH 4,0mm | 0° |  | | 40.002/4 | |
| GH 5,0mm | 0° |  | | 40.002/5 | |
| GH 2,0mm | 17° |  | 41.701/2* | 41.702/2* | |
| GH 3,0mm | 17° |  | 41.701/3* | 41.702/3* | |
| GH 4,0mm | 17° |  | | 41.702/4* | |
| GH 4,0mm | 30° |  | | 43.002/4* | |
| GH 5,0mm | 30° |  | | 43.002/5* | |

4.8 | 6.5
MULTI-UNIT PLATFORM






TI-BASE







| | | | | |
|----------|---|--------|--------|--------|
| GH 0,3mm |  | 15.001 | 15.002 | 15.003 |
| GH 1,5mm |  | 15.201 | 15.202 | 15.203 |
| GH 3,0mm |  | 15.301 | 15.302 | 15.303 |
| GH 0,3mm |  | 16.001 | 16.002 | 16.003 |
| GH 1,5mm |  | 16.201 | 16.202 | 16.203 |
| GH 3,0mm |  | 16.301 | 16.302 | 16.303 |



TI-BASE CASTABLES

| | | | | |
|---------|---|-----------|-----------|-----------|
| 5 Pack. |  | 32.001-P5 | 32.001-P5 | 32.001-P5 |
| 5 Pack. |  | 33.001-P5 | 33.001-P5 | 33.001-P5 |









| | | NP | RP | WP |
|-------------------|---|----------|----------|--------|
| | | NP/3.5 | RP/4.1 | WP/5.1 |
| AURUMBase® | | | | |
| GH 0,3mm |  | 36.001 | 36.002 | |
| GH 1,5mm |  | 36.001/2 | 36.002/2 | |
| GH 2,5mm |  | 36.001/3 | 36.002/3 | |
| GH 0,3mm |  | 37.001 | 37.002 | |
| GH 1,5mm |  | 37.001/2 | 37.002/2 | |
| GH 2,5mm |  | 37.001/3 | 37.002/3 | |

PLASTIC SLEEVES FOR AURUMBase®



| | | | |
|---------|-----|-----------|-----------|
| 5 Pack. | 0° | 33.100-P5 | 33.100-P5 |
| 5 Pack. | 10° | 33.101-P5 | 33.101-P5 |
| 5 Pack. | 20° | 33.102-P5 | 33.102-P5 |



| | | | | |
|----------------|---|-----------|-----------|--|
| C-Base® | | | | |
| GH 1,5mm |  | 58.001/2* | 58.002/2* | |
| GH 3,0mm |  | 58.001/3* | 58.002/3* | |
| GH 0,6mm |  | 59.001* | 59.002* | |
| GH 1,5mm |  | 59.001/2* | 59.002/2* | |
| GH 3,0mm |  | 59.001/3* | 59.002/3* | |

Includes screw, same as standard screw.

Libraries available for EXOCAD & 3Shape.



| | | | | |
|-------------------------------|--|--------|--------|--|
| Torx® Screw AURUMBase® | | | | |
| (replacement screw) | | 19.401 | 19.402 | |
| Recommended torque | | 35 Ncm | 35 Ncm | |



| Torx® BALL SCREWDRIVER | 20mm | 24mm | 30mm | 35mm |
|-------------------------------|----------|----------|----------|----------|
| | DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |



ABUTMENTS

| | | NP | RP | WP |
|--|-----|---------|---------|---------|
| | | NP/3.5 | RP/4.1 | WP/5.1 |
| | 0° | 13.001 | 13.002 | 13.003 |
| | 15° | 22.001* | 22.002* | 22.003* |
| | 25° | | 23.002* | |



SCREW UG

| | | 19.027 | 19.028 | 19.029 |
|---------------------------|----------|---------------|---------------|---------------|
| | 10 Pack. | 19.027-P10 | 19.028-P10 | 19.029-P10 |
| | DLC | 19.227 | 19.228 | 19.229 |
| | TIN | 19.627* | 19.628* | 19.629* |
| <i>Recommended torque</i> | | <i>35 Ncm</i> | <i>35 Ncm</i> | <i>35 Ncm</i> |



PRE-MILLED BLANK

| | | | | |
|--------|------|--------|--------|--------|
| Ø 10mm | Ti | 61.001 | 61.002 | 61.003 |
| Ø 14mm | CoCr | 71.001 | 71.002 | 71.003 |



CoCr BASE

| | | | | |
|--|---|--------|---------|--------|
| | ○ | 30.001 | 30.002 | 30.003 |
| | ⬡ | 31.001 | 31.002 | 31.003 |
| | ○ | | 30.102* | |



FOR WELDING TECHNIQUES

CASTABLE

| | | | | |
|----------|---|--------|------------|--------|
| | ○ | 28.001 | 28.002 | 28.003 |
| 10 Pack. | | | 11.002-P10 | |
| | ⬡ | 29.001 | 29.002 | 29.003 |
| 10 Pack. | | | 12.002-P10 | |



“The difference between something good and something exceptional is in the smallest detail”

At DESS® we believe that no detail is too small to escape close attention. That's why our exhaustive quality controls in every single part of the manufacturing process ensure that the quality of our products is guaranteed. Our confidence is such that we offer a lifetime warranty on all our products.





EXTERNAL HEX USA

compatible with
3i® Osseotite®

○ non-engaging

⬡ engaging







HEALING ABUTMENT

| | NP | RP | WP |
|----------|----------|----------|----------|
| | 3.4 | 4.1 | 5.0 |
| GH 3,0mm | 20.011/3 | 20.012/3 | 20.013/3 |
| GH 4,0mm | 20.011/4 | 20.012/4 | 20.013/4 |
| GH 5,0mm | 20.011/5 | 20.012/5 | 20.013/5 |



SCAN ABUTMENTS

| | NP | RP | WP |
|--|------------|------------|------------|
|  | 50.011 | 50.012 | 50.013 |
|  | 52.011 | 52.012 | 52.013 |
|  10 Pack. ○ | 53.100-P10 | 53.100-P10 | 53.100-P10 |
|  10 Pack. ⬡ | 53.200-P10 | 53.200-P10 | 53.200-P10 |



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

| | NP | RP | WP |
|--|--------|--------|--------|
| | 17.011 | 17.012 | 17.013 |

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE



Platform Colour Coded

Retention screw Hex 1,27 mm*

*Other retention screws available, see page 59

| NP | RP | WP |
|----------|----------|----------|
| 3.4 | 4.1 | 5.0 |
| 14.011/D | 14.012/D | 14.013/D |



ANALOGUE



Platform Colour Coded


10 Pack.

| | | |
|--------|------------|--------|
| 14.011 | 14.012 | 14.013 |
| | 14.012-P10 | |




TEMPORARY ABUTMENT

| | | | |
|---|--------|--------|--------|
| ○ | 24.011 | 24.012 | 24.013 |
| ⬡ | 25.011 | 25.012 | 25.013 |



DESSLoc®

| | | | |
|----------|----------|----------|----------|
| GH 1,0mm | 88.011/1 | 88.002/1 | 88.013/1 |
| GH 2,0mm | 88.011/2 | 88.002/2 | 88.013/2 |
| GH 3,0mm | 88.011/3 | 88.002/3 | 88.013/3 |
| GH 4,0mm | 88.011/4 | 88.002/4 | 88.013/4 |
| GH 5,0mm | 88.011/5 | 88.002/5 | 88.013/5 |
| GH 6,0mm | 88.011/6 | 88.002/6 | 88.013/6 |



MULTI-UNIT ABUTMENTS

NP












RP

WP

3.4

4.1






5.0

| | | | | | |
|----------|-----|---|----------|-----------|--|
| GH 1,0mm | 0° |  | 40.009/1 | 40.017/1 | |
| GH 2,0mm | 0° |  | 40.009/2 | 40.017/2 | |
| GH 3,0mm | 0° |  | 40.009/3 | 40.017/3 | |
| GH 4,0mm | 0° |  | | 40.017/4 | |
| GH 5,0mm | 0° |  | | 40.017/5 | |
| GH 2,0mm | 17° |  | | 41.712/2* | |
| GH 3,0mm | 17° |  | | 41.712/3* | |
| GH 4,0mm | 17° |  | | 41.712/4* | |
| GH 3,0mm | 30° |  | | 43.012/3* | |
| GH 4,0mm | 30° |  | | 43.012/4* | |
| GH 5,0mm | 30° |  | | 43.012/5* | |

4.8
MULTI-UNIT PLATFORM





TI-BASE

| | | | | | |
|----------|--|---|--------|--------|--------|
| GH 0,3mm | |  | 15.011 | 15.012 | 15.013 |
| GH 1,5mm | |  | 15.211 | 15.212 | 15.213 |
| GH 3,0mm | |  | 15.311 | 15.312 | 15.313 |
| GH 0,3mm | |  | 16.011 | 16.012 | 16.013 |
| GH 1,5mm | |  | 16.211 | 16.212 | 16.213 |
| GH 3,0mm | |  | 16.311 | 16.312 | 16.313 |










TI-BASE CASTABLES

| | | | | | |
|---------|--|---|-----------|-----------|-----------|
| 5 Pack. | |  | 32.001-P5 | 32.001-P5 | 32.001-P5 |
| 5 Pack. | |  | 33.001-P5 | 33.001-P5 | 33.001-P5 |

| NP | RP | WP |
|-----|-----|-----|
| 3.4 | 4.1 | 5.0 |

AURUMBase®




| | | | | |
|----------|---|----------|----------|--------|
| GH 0,3mm |  | 36.011 | 36.012 | 36.013 |
| GH 1,5mm |  | 36.011/2 | 36.012/2 | |
| GH 2,5mm |  | 36.011/3 | 36.012/3 | |
| GH 0,3mm |  | 37.011 | 37.012 | 37.013 |
| GH 1,5mm |  | 37.011/2 | 37.012/2 | |
| GH 2,5mm |  | 37.011/3 | 37.012/3 | |






PLASTIC SLEEVES FOR AURUMBase®



| | | | | |
|---------|-----|-----------|-----------|-----------|
| 5 Pack. | 0° | 33.100-P5 | 33.100-P5 | 33.100-P5 |
| 5 Pack. | 10° | 33.101-P5 | 33.101-P5 | 33.101-P5 |
| 5 Pack. | 20° | 33.102-P5 | 33.102-P5 | 33.102-P5 |

C-Base®



| | | | | |
|----------|---|----------|----------|----------|
| GH 1,5mm |  | 58.011/2 | 58.012/2 | 58.013/2 |
| GH 3,0mm |  | 58.011/3 | 58.012/3 | 58.013/3 |
| GH 0,6mm |  | 59.011 | 59.012 | 59.013 |
| GH 1,5mm |  | 59.011/2 | 59.012/2 | 59.013/2 |
| GH 3,0mm |  | 59.011/3 | 59.012/3 | 59.013/3 |

Includes screw, same as standard screw.

Libraries available for EXOCAD & 3Shape.

Torx® Screw AURUMBase®



| | | | |
|----------------------------|--------|--------|--------|
| <i>(replacement screw)</i> | 19.402 | 19.402 | 19.402 |
| <i>Recommended torque</i> | 20 Ncm | 20 Ncm | 20 Ncm |

Torx® BALL SCREWDRIVER



| 20mm | 24mm | 30mm | 35mm |
|----------|----------|----------|----------|
| DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |



ABUTMENTS

| | NP | RP | WP |
|--|-----|-----|-----|
| | 3.4 | 4.1 | 5.0 |

| | | | |
|-----|---------|---------|---------|
| 0° | 13.011 | 13.012 | 13.013 |
| 15° | 22.011* | 22.012* | 22.013* |
| 25° | | 23.012* | |



SCREW HEX 1,20mm

| | | | |
|---------------------------|---------------|---------------|---------------|
| | 19.034 | 19.034 | 19.034 |
| 10 Pack. | 19.034-P10 | 19.034-P10 | 19.034-P10 |
| TIN | 19.634* | 19.634* | 19.634* |
| <i>Recommended torque</i> | <i>20 Ncm</i> | <i>20 Ncm</i> | <i>20 Ncm</i> |



PRE-MILLED BLANK

| | | | | |
|--------|------|--------|--------|--------|
| Ø 10mm | Ti | 61.011 | 61.012 | 61.013 |
| Ø 14mm | CoCr | 71.011 | 71.012 | 71.013 |





CoCr BASE

| | | | |
|---|--------|--------|--------|
|  | 30.011 | 30.012 | 30.013 |
|  | 31.011 | 31.012 | 31.013 |



CASTABLE

| | | | |
|---|--------|------------|--------|
|  | 28.011 | 28.012 | 28.013 |
| 10 Pack. | | 11.002-P10 | |
|  | 29.011 | 29.012 | 29.013 |
| 10 Pack. | | 12.002-P10 | |

“There is no good idea that cannot be improved”

We are proud to say that innovation and quality are at the center of our core values. We look at different solutions and re-engineer them to provide better and more reliable alternatives. Products like our intra-oral scan abutment without a screw hole, which improves substantially the image precision, our angled Multi-unit abutment with a fully shaped connection and vertical access for more stability and less screw loosening or our angulated screw channel solution AURUMBase® that allows you 25° angle with a 360° rotation, are clear examples of our way of doing things.





INTERNAL HEX "CLICK"

compatible with
3i Certain®


○ non-engaging

⬡ engaging








HEALING ABUTMENT

| | NP | RP | WP |
|----------|----------|----------|----------|
| | 3.4 | 4.1 | 5.0 |
| GH 3,0mm | 20.014/3 | 20.015/3 | 20.016/3 |
| GH 4,0mm | 20.014/4 | 20.015/4 | 20.016/4 |
| GH 5,0mm | 20.014/5 | 20.015/5 | 20.016/5 |



SCAN ABUTMENTS

| | NP | RP | WP |
|--|------------|------------|------------|
|  | 50.014 | 50.015 | 50.016 |
|  | 52.014 | 52.015 | 52.016 |
|  10 Pack. ○ | 53.100-P10 | 53.100-P10 | 53.100-P10 |
|  10 Pack. ⬡ | 53.200-P10 | 53.200-P10 | 53.200-P10 |




52.xxx includes manual tool DTPEIPEEK.



TRANSFER

| | NP | RP | WP |
|--|--------|--------|--------|
| | 17.014 | 17.015 | 17.016 |

Transfers include two screws (for open and closed tray).

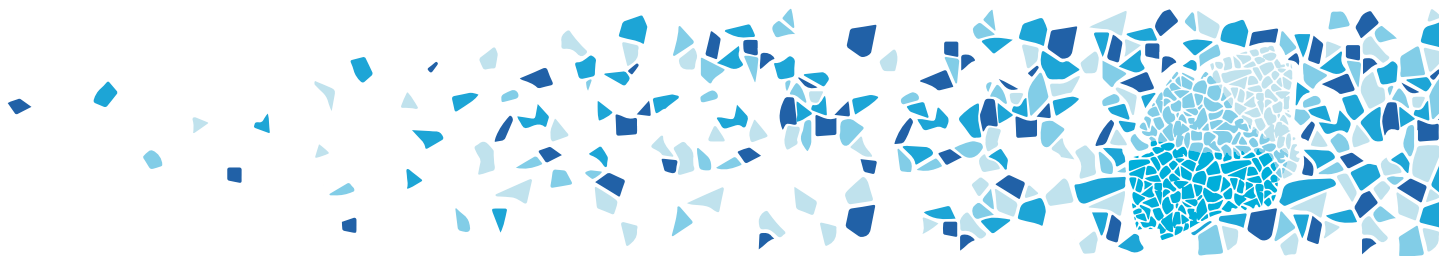

DIGITAL ANALOGUE

| NP | RP | WP |
|-----|-----|-----|
| 3.4 | 4.1 | 5.0 |



Platform Colour Coded

Retention screw Hex 1,27 mm*

*Other retention screws available, see page 59

| | | |
|----------|----------|----------|
| 14.014/D | 14.015/D | 14.016/D |
|----------|----------|----------|



ANALOGUE



Platform Colour Coded

10 Pack.

| | | |
|--------|--------|--------|
| 14.014 | 14.015 | 14.016 |
|--------|--------|--------|

14.015-P10



TEMPORARY ABUTMENT



| | | |
|--------|--------|--------|
| 24.014 | 24.015 | 24.016 |
|--------|--------|--------|



| | | |
|--------|--------|--------|
| 25.014 | 25.015 | 25.016 |
|--------|--------|--------|








DESSLoc®

| | | | |
|----------|----------|----------|----------|
| GH 1,0mm | 88.014/1 | 88.015/1 | 88.016/1 |
| GH 2,0mm | 88.014/2 | 88.015/2 | 88.016/2 |
| GH 3,0mm | 88.014/3 | 88.015/3 | 88.016/3 |
| GH 4,0mm | 88.014/4 | 88.015/4 | 88.016/4 |
| GH 5,0mm | 88.014/5 | 88.015/5 | 88.016/5 |
| GH 6,0mm | 88.014/6 | 88.015/6 | 88.016/6 |





TI-BASE


| NP | RP | WP |
|-----|-----|-----|
| 3.4 | 4.1 | 5.0 |

| | | | | |
|----------|---|--------|--------|--------|
| GH 0,3mm |  | 15.014 | 15.015 | 15.016 |
| GH 1,5mm |  | 15.214 | 15.215 | 15.216 |
| GH 3,0mm |  | 15.314 | 15.315 | 15.316 |
| GH 0,3mm |  | 16.014 | 16.015 | 16.016 |
| GH 1,5mm |  | 16.214 | 16.215 | 16.216 |
| GH 3,0mm |  | 16.314 | 16.315 | 16.316 |





TI-BASE CASTABLES

| | | | | |
|---------|---|-----------|-----------|-----------|
| 5 Pack. |  | 32.001-P5 | 32.001-P5 | 32.001-P5 |
| 5 Pack. |  | 33.001-P5 | 33.001-P5 | 33.001-P5 |




AURUMBase®

| | | | |
|---|--------|--------|--------|
|  | 36.014 | 36.015 | 36.016 |
|  | 37.014 | 37.015 | 37.016 |

PLASTIC SLEEVES FOR AURUMBase®











| | | | | |
|---------|-----|-----------|-----------|-----------|
| 5 Pack. | 0° | 33.100-P5 | 33.100-P5 | 33.100-P5 |
| 5 Pack. | 10° | 33.101-P5 | 33.101-P5 | 33.101-P5 |
| 5 Pack. | 20° | 33.102-P5 | 33.102-P5 | 33.102-P5 |



C-Base®

| NP | RP | WP |
|-----|-----|-----|
| 3.4 | 4.1 | 5.0 |

| | | | | |
|----------|---|----------|----------|----------|
| GH 0,4mm |  | 58.014 | 58.015 | |
| GH 0,5mm |  | | | 58.016 |
| GH 1,5mm |  | 58.014/2 | 58.015/2 | 58.016/2 |
| GH 3,0mm |  | 58.014/3 | 58.015/3 | 58.016/3 |
| GH 0,4mm |  | 59.014 | 59.015 | |
| GH 0,5mm |  | | | 59.016 |
| GH 1,5mm |  | 59.014/2 | 59.015/2 | 59.016/2 |
| GH 3,0mm |  | 59.014/3 | 59.015/3 | 59.016/3 |

Includes screw, same as standard screw.

Libraries available for EXOCAD & 3Shape.

Torx® Screw AURUMBase®



(replacement screw)

Recommended torque

| | | |
|--------|--------|--------|
| 19.438 | 19.438 | 19.438 |
| 20 Ncm | 20 Ncm | 20 Ncm |

Torx® BALL SCREWDRIVER



| | 20mm | 24mm | 30mm | 35mm |
|--|----------|----------|----------|----------|
| | DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |

ABUTMENTS



| | | | |
|-----|---------|---------|---------|
| 0° | 13.014 | 13.015 | 13.016 |
| 15° | 22.014* | 22.015* | 22.016* |
| 25° | | 23.015* | |



SCREW HEX 1,20mm

| | NP | RP | WP |
|---------------------------|---------------|---------------|---------------|
| | 3.4 | 4.1 | 5.0 |
| | 19.011 | 19.011 | 19.011 |
| 10 Pack. | 19.011-P10 | 19.011-P10 | 19.011-P10 |
| TIN | 19.611* | 19.611* | 19.611* |
| <i>Recommended torque</i> | <i>20 Ncm</i> | <i>20 Ncm</i> | <i>20 Ncm</i> |





PRE-MILLED BLANK

| | | | | |
|--------|------|--------|--------|--------|
| Ø 10mm | Ti | 61.014 | 61.015 | 61.016 |
| Ø 14mm | Ti | | 62.015 | 62.016 |
| Ø 14mm | CoCr | 71.014 | 71.015 | 71.016 |





CoCr BASE

| | | | |
|---|--------|--------|--------|
|  | 30.014 | 30.015 | 30.016 |
|  | 31.014 | 31.015 | 31.016 |




CASTABLE

| | | | | |
|----------|---|--------|------------|--------|
| |  | 28.014 | 28.015 | 28.016 |
| 10 Pack. | | | 11.015-P10 | |
| |  | 29.014 | 29.015 | 29.016 |
| 10 Pack. | | | 12.015-P10 | |

CONICAL BLT IMPLANT

The first **Zero Waste**
implant on the market





OCTAGON

○ non-engaging

◻ engaging

compatible with

Straumann® Tissue level & synOcta®




HEALING ABUTMENT

| | NNC | RN | WN |
|-------------|-----|----------|----------|
| | 3.5 | 4.1/4.8 | 4.8/6.5 |
| GH 2,0mm | | 20.009/2 | 20.045/2 |
| GH 3,0mm | | 20.009/3 | 20.045/3 |
| GH 4,0mm | | 20.009/4 | 20.045/4 |
| On abutment | | 20.010 | 20.049 |



CONVERTER ABUTMENT

| | | | |
|--|---|--------|--------|
| | ○ | 35.001 | |
| | ◻ | 34.001 | 34.002 |



SCAN ABUTMENTS

| | | | | |
|-------------|--------------|------------|-----------|-----------|
| | | 50.070 | 50.009 | 50.045 |
| On abutment | | | 50.010 | 50.048 |
| | | 52.070 | 52.009 | 52.045 |
| On abutment | | | 52.010 | 52.048 |
| | 10/5 Pack. ○ | 53.100-P10 | 53.110-P5 | 53.148-P5 |
| | 10/5 Pack. ◻ | 53.200-P10 | 53.210-P5 | 53.248-P5 |



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

| | NNC | RN | WN |
|--------------------|--------|---------|---------|
| | 3.5 | 4.1/4.8 | 4.8/6.5 |
| | 17.070 | 17.009 | 17.053 |
| On abutment | | 17.010 | 17.048 |

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE



Platform Colour Coded

| | 14.070/D | 14.009/D | 14.045/D |
|------------------------------|----------|----------|----------|
| Retention screw Hex 1,27 mm* | | | |
| On abutment | | 14.010/D | 14.046/D |

*Other retention screws available, see page 59



ANALOGUE




Platform Colour Coded

| | 14.070 | 14.009 | 14.045 |
|--------------------|----------|------------|--------|
| | | | |
| | 10 Pack. | 14.009-P10 | |
| On abutment | | 14.010 | 14.046 |
| | 10 Pack. | 14.010-P10 | |



TEMPORARY ABUTMENT

| | | | |
|--------------------|---|--------|--------|
| | ○ | 24.026 | 24.045 |
| | ○ | 25.009 | 25.045 |
| On abutment | ○ | 24.010 | 24.047 |
| | ○ | 25.026 | 25.047 |



DESSLoc®

NNC

RN

WN


3.5







4.1/4.8

4.8/6.5

| | | | |
|----------|--|--|----------|
| GH 1,0mm | | | 88.009/1 |
| GH 2,0mm | | | 88.009/2 |
| GH 3,0mm | | | 88.009/3 |
| GH 4,0mm | | | 88.009/4 |

TI-BASE








| | | | | |
|----------|--|--------|--|--------|
| GH 0,3mm |  | | | 15.045 |
| GH 0,4mm |  | | | 15.046 |
| GH 0,5mm |  | 15.070 | | |
| GH 0,3mm |  | | | 16.045 |
| GH 0,4mm |  | | | 16.009 |
| GH 0,5mm |  | 16.070 | | |

| | | | | | |
|--------------------|----------|---|--|--------|--------|
| On abutment | GH 0,3mm |  | | 15.010 | 15.048 |
| | GH 0,3mm |  | | 16.010 | 16.048 |



TI-BASE CASTABLES

| | | | | | |
|--------------------|---------|---|-----------|-----------|-----------|
| | 5 Pack. |  | 32.001-P5 | 32.046-P5 | 32.045-P5 |
| | 5 Pack. |  | 33.001-P5 | 33.009-P5 | 33.045-P5 |
| On abutment | 5 Pack. |  | | 32.010-P5 | 32.045-P5 |
| | 5 Pack. |  | | 33.010-P5 | 33.045-P5 |




AURUMBase®

| | | | | |
|--|---|--|--------|--------|
| |  | | 36.046 | 36.047 |
| |  | | 37.009 | 37.045 |





PLASTIC SLEEVES FOR AURUMBase®



| | | | | |
|---------|-----|--|-----------|-----------|
| 5 Pack. | 0° | | 33.200-P5 | 33.300-P5 |
| 5 Pack. | 10° | | 33.201-P5 | 33.301-P5 |
| 5 Pack. | 20° | | 33.202-P5 | 33.302-P5 |




C-Base®



| | | NNC | RN | WN |
|----------|---|------------|----------------|----------------|
| | | 3.5 | 4.1/4.8 | 4.8/6.5 |
| GH 1,0mm |  | | 58.009 | |
| GH 1,2mm |  | | | 58.045 |
| GH 1,0mm |  | | 59.009 | |
| GH 1,2mm |  | | | 59.045 |

Includes screw, same as standard screw.

Libraries available for EXOCAD & 3Shape.



ELLIPTIBase®

| | | | | |
|-----------------|--|--------|--|--|
| A corner |  | 56.070 | | |
| B flat |  | 57.070 | | |

Torx® Screw
AURUMBase® & ELLIPTIBase®



| | | | |
|----------------------------|--------|--------|--------|
| <i>(replacement screw)</i> | 19.441 | 19.446 | 19.446 |
| <i>Recommended torque</i> | 35 Ncm | 35 Ncm | 36 Ncm |

Torx® BALL SCREWDRIVER



| | 20mm | 24mm | 30mm | 35mm |
|--|-------------|-------------|-------------|-------------|
| | DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |



| | NNC | RN | WN |
|------------------|------------|----------------|----------------|
| ABUTMENTS | 3.5 | 4.1/4.8 | 4.8/6.5 |
| 0° | | 13.009 | |
| 15° | | 22.009* | |
| 25° | | 23.009* | |

**inc. captive screw*



| | NNC | RN | WN |
|---------------------------|---------------|---------------|---------------|
| | 19.070 | 19.026 | 19.026 |
| 10 Pack. | | 19.026-P10 | 19.026-P10 |
| TIN | 19.670* | 19.626* | 19.626* |
| <i>Recommended torque</i> | <i>35 Ncm</i> | <i>35 Ncm</i> | <i>35 Ncm</i> |
| On abutment | | 19.009 | 19.009 |
| 10 Pack. | | 19.009-P10 | 19.009-P10 |
| TIN | | 19.609* | 19.609* |
| <i>Recommended torque</i> | | <i>15 Ncm</i> | <i>15 Ncm</i> |



| | | NNC | RN | WN |
|--------|------|--------|--------|--------|
| Ø 10mm | Ti | 61.070 | 61.009 | 61.045 |
| Ø 14mm | Ti | | 62.009 | 62.045 |
| Ø 14mm | CoCr | 71.070 | 71.009 | 71.045 |



CoCr BASE

NNC

RN

WN

3.5

4.1/4.8

4.8/6.5

For welding techniques

On abutment

For welding techniques



30.009

30.045



31.009

31.045



30.109*

30.145*



31.109*

31.145*



30.010

30.048



31.010

31.048



30.110*



CASTABLE



28.009

28.045

10 Pack.

11.009-P10



29.009

29.045

10 Pack.

12.009-P10

On abutment



28.010

28.046

10 Pack.

11.010-P10

On abutment




29.010

29.046

10 Pack.

12.010-P10



CONICAL BL

○ non-engaging


⊞ engaging

compatible with
Straumann® Bone level





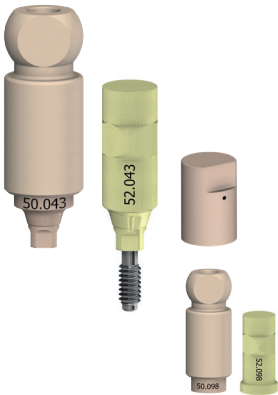


HEALING ABUTMENT

| | NP | RP | NP/RP |
|----------|----------|------------|-------|
| | NC/3.3 | RC/4.1-4.8 | NC/RC |
| GH 3,0mm | 20.041/3 | 20.042/3 | |
| GH 4,0mm | 20.041/4 | 20.042/4 | |
| GH 5,0mm | 20.041/5 | 20.042/5 | |



SCAN ABUTMENTS

| | | | | |
|---|------------|------------|------------|--------|
|  | | 50.043 | 50.044 | |
| On abutment SRA | | | | 50.098 |
|  | | 52.043 | 52.044 | |
| On abutment SRA | | | | 52.098 |
|  | 10 Pack. ○ | 53.100-P10 | 53.100-P10 | |
|  | 10 Pack. ⊞ | 53.200-P10 | 53.200-P10 | |



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

| | | | |
|--|--------|--------|--|
| | 17.046 | 17.047 | |
|--|--------|--------|--|

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE



Platform Colour Coded

Retention screw Hex 1,27 mm*

OF SRA

*Other retention screws available, see page 59

| | NP | RP | NP/RP |
|---------------|----------|------------|----------|
| | NC/3.3 | RC/4.1-4.8 | NC/RC |
| | 14.043/D | 14.044/D | |
| OF SRA | | | 14.098/D |



ANALOGUE



Platform Colour Coded

10 Pack.

OF SRA

| | NP | RP | NP/RP |
|---------------|------------|------------|--------|
| | 14.043 | 14.044 | |
| | 14.043-P10 | 14.044-P10 | |
| OF SRA | | | 14.098 |



TEMPORARY ABUTMENT

On abutment SRA

| | | | |
|---|--------|---------|---------|
| ○ | 24.043 | 24.044* | |
| ○ | 25.043 | 25.044 | |
| ○ | | | 24.098* |
| ○ | | | 25.098* |











DESSLoc®

| | | |
|----------|----------|----------|
| GH 1,0mm | | 88.042/1 |
| GH 2,0mm | 88.041/2 | 88.042/2 |
| GH 3,0mm | 88.041/3 | 88.042/3 |
| GH 4,0mm | 88.041/4 | 88.042/4 |









MULTI-UNIT ABUTMENTS

| | | | NP | RP | NP/RP |
|----------|-----|---|----------|------------|-------|
| | | | NC/3.3 | RC/4.1-4.8 | NC/RC |
| GH 1,5mm | 0° |  | 40.043/1 | 40.044/1 | |
| GH 2,5mm | 0° |  | 40.043/2 | 40.044/2 | |
| GH 3,5mm | 0° |  | 40.043/3 | 40.044/3 | |
| GH 4,5mm | 0° |  | | 40.044/4 | |
| GH 2,5mm | 17° |  | 41.743/2 | 41.744/2 | |
| GH 3,5mm | 17° |  | 41.743/3 | 41.744/3 | |
| GH 3,5mm | 30° |  | 43.043/3 | 43.044/3 | |
| GH 4,5mm | 30° |  | 43.043/4 | 43.044/4 | |



4.8
MULTI-UNIT PLATFORM



TI-BASE





| | | | |
|----------|---|----------|----------|
| GH 1,2mm |  | 15.043 | 15.044 |
| GH 2,0mm |  | 15.043/2 | 15.044/2 |
| GH 3,0mm |  | 15.343 | 15.344 |
| GH 1,2mm |  | 16.043 | 16.044 |
| GH 2,0mm |  | 16.043/2 | 16.044/2 |
| GH 3,0mm |  | 16.343 | 16.344 |




| | | | |
|--------|---|--|---------|
| ON SRA |  | | 15.098* |
| |  | | 16.098* |





TI-BASE CASTABLES

| | | | |
|---------|---|-----------|-----------|
| 5 Pack. |  | 32.001-P5 | 32.001-P5 |
| 5 Pack. |  | 33.001-P5 | 33.001-P5 |
| ON SRA |  | | 32.098-P5 |
| 5 Pack. |  | | 33.098-P5 |




AURUMBase®

| | | NP | RP | NP/RP |
|--|---|--------|------------|-------|
| | | NC/3.3 | RC/4.1-4.8 | NC/RC |
| |  | 36.043 | 36.044 | |
| |  | 37.043 | 37.044 | |





PLASTIC SLEEVES FOR AURUMBase®



| | | | |
|---------|-----|-----------|-----------|
| 5 Pack. | 0° | 33.100-P5 | 33.100-P5 |
| 5 Pack. | 10° | 33.101-P5 | 33.101-P5 |
| 5 Pack. | 20° | 33.102-P5 | 33.102-P5 |




C-Base®

| | | | |
|----------|---|----------|----------|
| GH 0,7mm |  | 58.043* | 58.044 |
| GH 3,0mm |  | 58.043/3 | 58.044/3 |
| GH 0,7mm |  | 59.043 | 59.044 |
| GH 3,0mm |  | 59.043/3 | 59.044/3 |

Includes screw, same as standard screw.

Libraries available for EXOCAD & 3Shape.



ELLIPTIBase®

| | | |
|----------|---|--------|
| A corner |  | 56.043 |
| B flat |  | 57.043 |

Torx® Screw
AURUMBase® & ELLIPTIBase®



| | | |
|---------------------|--------|--------|
| (replacement screw) | 19.443 | 19.443 |
| Recommended torque | 35 Ncm | 35 Ncm |

Torx® BALL SCREWDRIVER



| | 20mm | 24mm | 30mm | 35mm |
|--|----------|----------|----------|----------|
| | DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |



| | | NP | RP | NP/RP |
|------------------|-----|---------|------------|-------|
| ABUTMENTS | | NC/3.3 | RC/4.1-4.8 | NC/RC |
| | 0° | 13.043 | 13.044 | |
| | 15° | 22.043* | 22.044* | |



| | | 19.032 | 19.033 | 19.037 |
|---------------------------|----------|------------|------------|------------|
| | 10 Pack. | 19.032-P10 | 19.033-P10 | 19.037-P10 |
| | TIN | 19.632* | 19.633* | 19.637* |
| <i>Recommended torque</i> | | 35 Ncm | 35 Ncm | 35 Ncm |







| On abutment SRA | | | | 19.098* |
|---------------------------|----------|--|--|-------------|
| | 10 Pack. | | | 19.098-P10* |
| | TIN | | | 19.698* |
| <i>Recommended torque</i> | | | | 15 Ncm |



| PRE-MILLED BLANK | | | | |
|-------------------------|------|--------|--------|--|
| Ø 10mm | Ti | 61.043 | 61.044 | |
| Ø 14mm | Ti | 62.043 | 62.044 | |
| Ø 14mm | CoCr | 71.043 | 71.044 | |






CoCr BASE

| | | NP | RP | NP/RP |
|------------------------|---|---------------|-------------------|--------------|
| | | NC/3.3 | RC/4.1-4.8 | NC/RC |
| |  | 30.043 | 30.044 | |
| |  | 31.043 | 31.044 | |
| On abutment SRA |  | | | 30.098* |
| |  | | | 31.098* |



CASTABLE

| | | | | |
|-----------------|---|------------|------------|--|
| |  | 28.043 | 28.044 | |
| 10 Pack. | | 11.043-P10 | 11.044-P10 | |
| |  | 29.043 | 29.044 | |
| 10 Pack. | | 12.043-P10 | 12.044-P10 | |




CONICAL BLX

○ non-engaging

⬡ engaging


compatible with
Straumann® BLX




| HEALING ABUTMENT | RB | WB | RB/WB |
|-------------------------|----------|----------|----------|
| | 3.5 | 4.5 | |
| GH 0,8mm ^{A/B} | | 20.463/1 | |
| GH 1,5mm ^A | 20.461/2 | 20.461/2 | 20.461/2 |
| GH 1,5mm ^B | 20.462/2 | 20.462/2 | 20.462/2 |
| GH 1,5mm ^{A/B} | | 20.463/2 | |
| GH 2,5mm ^A | 20.461/3 | 20.461/3 | 20.461/3 |
| GH 2,5mm ^B | 20.462/3 | 20.462/3 | 20.462/3 |
| GH 3,5mm ^A | 20.461/4 | 20.461/4 | 20.461/4 |
| GH 3,5mm ^B | 20.462/4 | 20.462/4 | 20.462/4 |




^Afor single crown restoration ^Bfor bridges and structures restorations

SCAN ABUTMENTS



| | | |
|---|------------|------------|
|  | | 52.062 |
|  | 10 Pack. ○ | 53.100-P10 |
|  | 10 Pack. ⬡ | 53.200-P10 |



52.xxx includes manual tool DTPEIPEEK.

TRANSFER



17.062

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE

| RB | WB | RB/WB |
|-----|-----|-------|
| 3.5 | 4.5 | |

 Platform Colour Coded

Retention screw Hex 1,27 mm*

14.062/D

14.063/D

*Other retention screws available, see page 59



ANALOGUE

 Platform Colour Coded



14.062

14.063











MULTI-UNIT ABUTMENTS



| | | | |
|----------|-----|---|----------|
| GH 1,5mm | 0° |  | 40.062/1 |
| GH 2,5mm | 0° |  | 40.062/2 |
| GH 3,5mm | 0° |  | 40.062/3 |
| GH 2,5mm | 17° |  | 41.762/2 |
| GH 3,5mm | 17° |  | 41.762/3 |
| GH 3,5mm | 30° |  | 43.062/3 |
| GH 4,5mm | 30° |  | 43.062/4 |



4.8
MULTI-UNIT PLATFORM




| TI-BASE | | RB | WB | RB/WB |
|----------|---|----------|----------|----------|
| | | 3.5 | 4.5 | |
| GH 0,8mm |  | | 15.063 | |
| GH 1,5mm |  | 15.062/2 | 15.063/2 | 15.062/2 |
| GH 2,5mm |  | 15.062/3 | | 15.062/3 |
| GH 3,5mm |  | 15.062/4 | | 15.062/4 |
| GH 0,8mm |  | | 16.063 | |
| GH 1,5mm |  | 16.062/2 | 16.063/2 | 16.062/2 |
| GH 2,5mm |  | 16.062/3 | | 16.062/3 |
| GH 3,5mm |  | 16.062/4 | | 16.062/4 |




TI-BASE CASTABLES

| | | | | | |
|---------|---|-----------|-----------|-----------|-----------|
| 5 Pack. |  | 32.001-P5 | 32.001-P5 | 32.001-P5 | 32.001-P5 |
| 5 Pack. |  | 33.001-P5 | 33.001-P5 | 33.001-P5 | 33.001-P5 |



AURUMBase®

| | | | | |
|----------|---|--------|--------|--------|
| GH 1,5mm |  | 36.062 | 36.063 | 36.062 |
| GH 1,5mm |  | 37.062 | 37.063 | 37.062 |

PLASTIC SLEEVES FOR AURUMBase®



| | | | | |
|---------|-----|-----------|-----------|-----------|
| 5 Pack. | 0° | 33.100-P5 | 33.100-P5 | 33.100-P5 |
| 5 Pack. | 10° | 33.101-P5 | 33.101-P5 | 33.101-P5 |
| 5 Pack. | 20° | 33.102-P5 | 33.102-P5 | 33.102-P5 |



Torx® Screw AURUMBase®

(replacement screw)

Recommended torque

| | RB | WB | RB/WB |
|---------------------|--------|--------|--------|
| | 3.5 | 4.5 | |
| (replacement screw) | 19.441 | 19.441 | 19.441 |
| Recommended torque | 35 Ncm | 35 Ncm | 35 Ncm |

Torx® BALL SCREWDRIVER



| | 20mm | 24mm | 30mm | 35mm |
|--|----------|----------|----------|----------|
| | DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |



SCREW TORX®

| | | | |
|--------------------|---------|---------|---------|
| | 19.054 | 19.054 | 19.054 |
| TIN | 19.700* | 19.700* | 19.700* |
| Recommended torque | 35 Ncm | 35 Ncm | 35 Ncm |



PRE-MILLED BLANK

| | | | |
|--------|------|--------|--------|
| Ø 10mm | Ti | | 61.062 |
| Ø 14mm | Ti | 62.063 | |
| Ø 14mm | CoCr | 71.063 | |



NEO GM

compatible with
Neodent® Grand Morse

○ non-engaging

⬡ engaging

GM



SCAN ABUTMENTS




10 Pack. ○

10 Pack. ⬡

52.035

53.100-P10

53.200-P10



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

17.035

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE

■ Platform Colour Coded

Retention screw Hex 1,27 mm*

*Other retention screws available, see page 59

14.035/D



ANALOGUE

■ Platform Colour Coded

14.035

GM

**MULTI-UNIT
ABUTMENTS**



| | | | |
|----------|-----|---|----------|
| GH 1,5mm | 0° | ○ | 40.035/1 |
| GH 2,5mm | 0° | ○ | 40.035/2 |
| GH 3,5mm | 0° | ○ | 40.035/3 |
| GH 2,5mm | 17° | ⬡ | 41.735/2 |
| GH 3,5mm | 17° | ⬡ | 41.735/3 |
| GH 3,5mm | 30° | ⬡ | 43.035/3 |
| GH 4,5mm | 30° | ⬡ | 43.035/4 |

TI-BASE




| | | |
|----------|---|--------|
| GH 0,8mm | ○ | 15.035 |
| GH 1,5mm | ○ | 15.235 |
| GH 2,5mm | ○ | 15.335 |
| GH 0,8mm | ⬡ | 16.035 |
| GH 1,5mm | ⬡ | 16.235 |
| GH 2,5mm | ⬡ | 16.335 |

TI-BASE CASTABLES



| | | |
|---------|---|-----------|
| 5 Pack. | ○ | 32.001-P5 |
| 5 Pack. | ⬡ | 33.001-P5 |



AURUMBase®

| | | |
|----------|---|----------|
| GH 2,5mm |  | 36.035/3 |
| GH 2,5mm |  | 37.035/3 |

PLASTIC SLEEVES FOR AURUMBase®


| | | | |
|---|---------|-----|-----------|
|  | 5 Pack. | 0° | 33.100-P5 |
|  | 5 Pack. | 10° | 33.101-P5 |
|  | 5 Pack. | 20° | 33.102-P5 |



Torx® Screw AURUMBase®

| | |
|---------------------|--------|
| (replacement screw) | 19.444 |
| Recommended torque | 20 Ncm |

Torx® BALL SCREWDRIVER

| | 20mm | 24mm | 30mm | 35mm |
|---|----------|----------|----------|----------|
|  | DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |



SCREW NEO

| | |
|--------------------|--------|
| | 19.051 |
| Recommended torque | 20 Ncm |




PRE-MILLED BLANK

| | | |
|--------|------|--------|
| Ø 10mm | Ti | 61.035 |
| Ø 14mm | Ti | 62.035 |
| Ø 14mm | CoCr | 71.035 |

ACTIVE HEX[®] IMPLANT

The first **Zero Waste**
implant on the market





INTERNAL HEX USA

compatible with
Zimmer Screw-Vent®


○ non-engaging

⬡ engaging



HEALING ABUTMENT

| | NP | RP | WP |
|----------|----------|----------|----------|
| | 3.5 | 4.5 | 5.7 |
| GH 3,0mm | 20.017/3 | 20.018/3 | 20.019/3 |
| GH 4,0mm | 20.017/4 | 20.018/4 | 20.019/4 |
| GH 5,0mm | 20.017/5 | 20.018/5 | 20.019/5 |



SCAN ABUTMENTS

| | | | | |
|--|------------|------------|------------|------------|
| | | 50.017 | 50.018 | 50.019 |
| | | 52.017 | 52.018 | 52.019 |
| | 10 Pack. ○ | 53.100-P10 | 53.100-P10 | 53.100-P10 |
| | 10 Pack. ⬡ | 53.200-P10 | 53.200-P10 | 53.200-P10 |



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

| | | | |
|--|--------|--------|--------|
| | 17.017 | 17.018 | 17.019 |
|--|--------|--------|--------|

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE

| | | | | | |
|--|-----------------------|------------------------------|----------|----------|----------|
| | Platform Colour Coded | Retention screw Hex 1,27 mm* | 14.017/D | 14.018/D | 14.019/D |
|--|-----------------------|------------------------------|----------|----------|----------|

*Other retention screws available, see page 59



ANALOGUE

| | | | | | |
|--|-----------------------|----------|------------|------------|--------|
| | Platform Colour Coded | 10 Pack. | 14.017 | 14.018 | 14.019 |
| | | | 14.017-P10 | 14.018-P10 | |



TEMPORARY ABUTMENT

| NP | RP | WP |
|-----|-----|-----|
| 3.5 | 4.5 | 5.7 |

| | | | |
|---|--------|--------|--------|
| ○ | 24.017 | 24.018 | 24.019 |
| ○ | 25.017 | 25.018 | 25.019 |



DESSLoc®

| | | | |
|----------|----------|----------|----------|
| GH 1,0mm | 88.017/1 | 88.018/1 | 88.019/1 |
| GH 2,5mm | 88.017/2 | 88.018/2 | 88.019/2 |
| GH 3,5mm | 88.017/3 | 88.018/3 | 88.019/3 |
| GH 4,5mm | 88.017/4 | 88.018/4 | 88.019/4 |
| GH 5,5mm | 88.017/5 | 88.018/5 | |



MULTI-UNIT ABUTMENTS

| | | | | |
|----------|----|---|----------|----------|
| GH 1,0mm | 0° | ○ | 40.019/1 | 40.020/1 |
| GH 2,0mm | 0° | ○ | 40.019/2 | 40.020/2 |
| GH 3,0mm | 0° | ○ | 40.019/3 | 40.020/3 |
| GH 4,0mm | 0° | ○ | 40.019/4 | 40.020/4 |
| GH 5,0mm | 0° | ○ | 40.019/5 | 40.020/5 |



| | | | | |
|----------|-----|---|----------|----------|
| GH 2,5mm | 17° | ○ | 41.719/2 | 41.720/2 |
| GH 3,5mm | 17° | ○ | 41.719/3 | 41.720/3 |
| GH 3,5mm | 30° | ○ | 43.019/3 | 43.020/3 |
| GH 4,5mm | 30° | ○ | 43.019/4 | 43.020/4 |



4.8
MULTI-UNIT PLATFORM




| TI-BASE | | NP | RP | WP |
|---------|----------|--------|--------|--------|
| | | 3.5 | 4.5 | 5.7 |
| | GH 0,3mm | | 15.018 | 15.019 |
| | GH 0,8mm | 15.017 | | |
| | GH 1,5mm | 15.217 | 15.218 | 15.219 |
| | GH 3,0mm | 15.317 | 15.318 | 15.319 |
| | GH 0,3mm | | 16.018 | 16.019 |
| | GH 0,8mm | 16.017 | | |
| | GH 1,5mm | 16.217 | 16.218 | 16.219 |
| | GH 3,0mm | 16.317 | 16.318 | 16.319 |





TI-BASE CASTABLES

| | | | | |
|---------|---|-----------|-----------|-----------|
| 5 Pack. |  | 32.001-P5 | 32.001-P5 | 32.001-P5 |
| 5 Pack. |  | 33.001-P5 | 33.001-P5 | 33.001-P5 |




AURUMBase®







| | | | | |
|--|---|--------|--------|--------|
| |  | 36.017 | 36.018 | 36.019 |
| |  | 37.017 | 37.018 | 37.019 |

PLASTIC SLEEVES FOR AURUMBase®

| | | | | | |
|---|---------|-----|-----------|-----------|-----------|
|  | 5 Pack. | 0° | 33.100-P5 | 33.100-P5 | 33.100-P5 |
|  | 5 Pack. | 10° | 33.101-P5 | 33.101-P5 | 33.101-P5 |
|  | 5 Pack. | 20° | 33.102-P5 | 33.102-P5 | 33.102-P5 |




C-Base®



| | | NP | RP | WP |
|----------|---|----------|----------|----------|
| | | 3.5 | 4.5 | 5.7 |
| GH 0,5mm |  | 58.017 | 58.018 | 58.019 |
| GH 1,5mm |  | 58.017/2 | 58.018/2 | 58.019/2 |
| GH 3,0mm |  | 58.017/3 | 58.018/3 | 58.019/3 |
| GH 0,5mm |  | 59.017 | 59.018 | 59.019 |
| GH 1,5mm |  | 59.017/2 | 59.018/2 | 59.019/2 |
| GH 3,0mm |  | 59.017/3 | 59.018/3 | 59.019/2 |

Includes screw, same as standard screw.

Libraries available for EXOCAD & 3Shape.



ELLIPTIBase®

| | | |
|----------|---|--------|
| A corner |  | 56.017 |
| B flat |  | 57.017 |

Torx® Screw
AURUMBase® & ELLIPTIBase®



| | | | |
|---------------------|--------|--------|--------|
| (replacement screw) | 19.417 | 19.417 | 19.417 |
| Recommended torque | 30 Ncm | 30 Ncm | 30 Ncm |

Torx® BALL SCREWDRIVER



| | 20mm | 24mm | 30mm | 35mm |
|--|----------|----------|----------|----------|
| | DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |



ABUTMENTS

| | | | |
|-----|---------|---------|---------|
| 0° | 13.017 | 13.018 | 13.019 |
| 15° | 22.017* | 22.018* | 22.019* |
| 25° | 23.017* | 23.018* | |



SCREW HEX 1,27mm

| | | NP | RP | WP |
|---------------------------|----------|------------|------------|------------|
| | | 3.5 | 4.5 | 5.7 |
| | | 19.042 | 19.042 | 19.042 |
| | 10 Pack. | 19.042-P10 | 19.042-P10 | 19.042-P10 |
| | TIN | 19.642* | 19.642* | 19.642* |
| <i>Recommended torque</i> | | 30 Ncm | 30 Ncm | 30 Ncm |



PRE-MILLED BLANK

| Ø 10mm | Ti | 61.017 | 61.018 | 61.019 |
|--------|------|--------|--------|--------|
| Ø 14mm | Ti | 62.017 | 62.018 | 62.019 |
| Ø 14mm | CoCr | 71.017 | 71.018 | 71.019 |



CoCr BASE

| | | ○ | 30.017 | 30.018 | 30.019 |
|--|--|---|--------|--------|--------|
| | | ○ | 31.017 | 31.018 | 31.019 |




CASTABLE


| | | ○ | 28.017 <small>19.012</small> | 28.018 <small>19.012</small> | 28.019 <small>19.012</small> |
|--|----------|---|---------------------------------|---------------------------------|---------------------------------|
| | 10 Pack. | | 11.017-P10 | 11.018-P10 | |
| | | ○ | 29.017 <small>19.012</small> | 29.018 <small>19.012</small> | 29.019 <small>19.012</small> |
| | 10 Pack. | | 12.017-P10 | 12.018-P10 | |


AURUMBase[®]

AURUMBase[®] is our solution to clinical situations where the the implant's long-axis results in an unfavorable location of the prosthetic screw access hole.

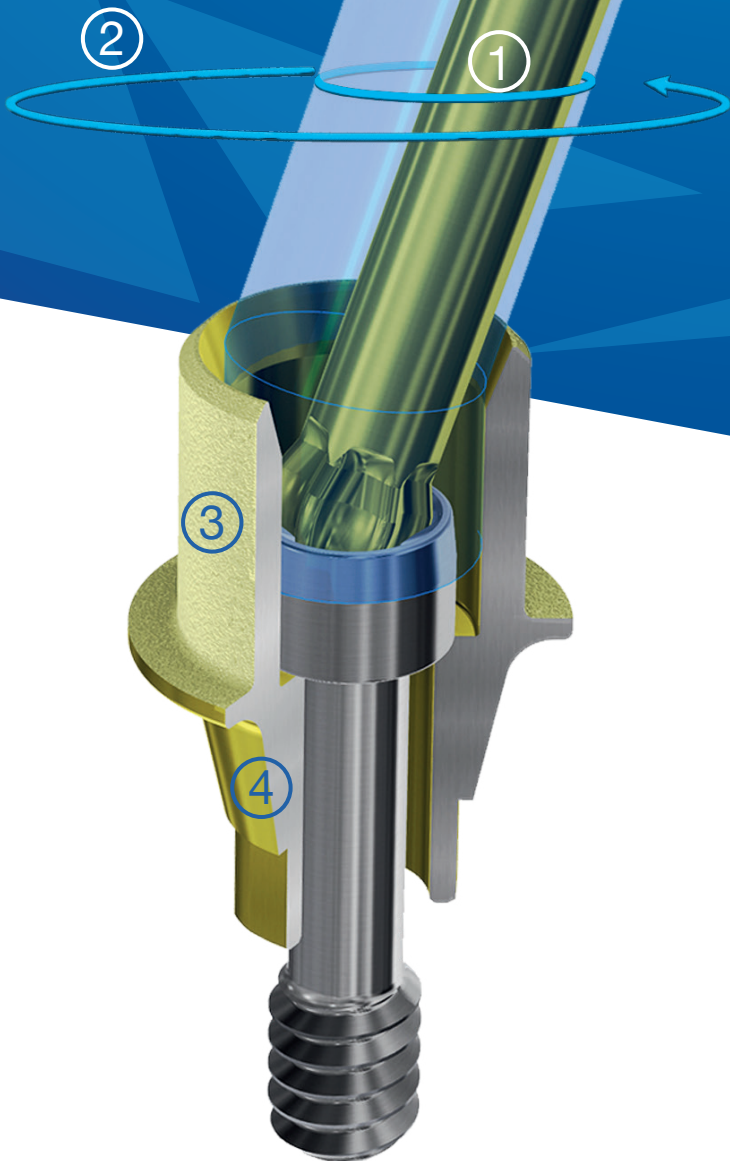

1. 25° Maximum angulation.
2. 360° freedom.
3. SelectGrip[®]
4. Titanium Grade V.

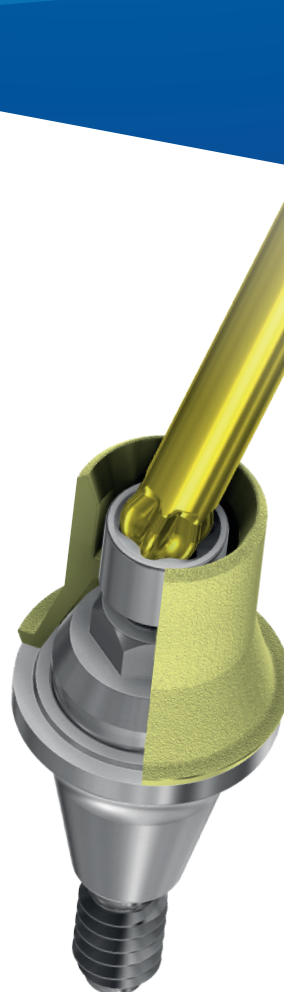



CONIC EVO

compatible with

Astra Tech implant system™ EV

○ non-engaging

⊕ engaging




HEALING ABUTMENT

| | EV/3.0 | EV/3.6 | EV/4.2 | EV/4.8 | EV/5.4 |
|----------|----------|----------|----------|----------|----------|
| | 3.0 | 3.6 | 4.2 | 4.8 | 5.4 |
| GH 3,5mm | 20.406/3 | 20.059/3 | 20.060/3 | 20.061/3 | 20.407/3 |
| GH 4,5mm | 20.406/4 | 20.059/4 | 20.060/4 | 20.061/4 | 20.407/4 |
| GH 6,5mm | 20.406/6 | 20.059/6 | 20.060/6 | 20.061/6 | 20.407/6 |



SCAN ABUTMENTS

| | | | | | |
|-----------------|----------|------------|------------|------------|------------|
| | | 50.059 | 50.060 | 50.061 | |
| | | 52.406 | 52.059 | 52.060 | 52.407 |
| | 10 Pack. | 53.100-P10 | 53.100-P10 | 53.100-P10 | 53.100-P10 |
| | 10 Pack. | 53.200-P10 | 53.200-P10 | 53.200-P10 | 53.200-P10 |
| On uniabutment® | | 50.058 | | | |
| On uniabutment® | | 52.058 | | | |




52.xxx includes manual tool DTPEIPEEK.



TRANSFER


| | | | | | |
|-----------------|--------|--------|--------|--------|--|
| | | 17.059 | 17.060 | 17.061 | |
| On uniabutment® | 17.058 | | | | |

Transfers include two screws (for open and closed tray).

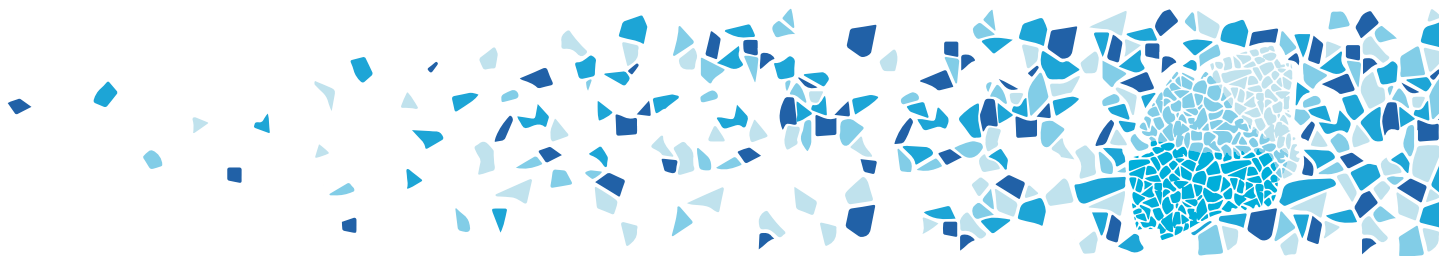

DIGITAL ANALOGUE

| EV/3.0 | EV/3.6 | EV/4.2 | EV/4.8 | EV/5.4 |
|--------|--------|--------|--------|--------|
| 3.0 | 3.6 | 4.2 | 4.8 | 5.4 |



Retention screw Hex 1,27 mm*

On uniabutment®


14.058/D

| | | | | |
|----------|----------|----------|----------|----------|
| 14.406/D | 14.059/D | 14.060/D | 14.061/D | 14.407/D |
|----------|----------|----------|----------|----------|

*Other retention screws available, see page 59



ANALOGUE



On uniabutment®

14.058

| | | | | |
|--------|--------|--------|--------|--------|
| 14.406 | 14.059 | 14.060 | 14.061 | 14.407 |
|--------|--------|--------|--------|--------|



TEMPORARY ABUTMENT

On uniabutment®



24.058

| | | |
|--------|--------|--------|
| 24.059 | 24.060 | 24.061 |
| 25.059 | 25.060 | 25.061 |



DESSLoc®

| | | | |
|----------|----------|----------|----------|
| GH 1,0mm | 88.059/1 | 88.060/1 | 88.061/1 |
| GH 2,0mm | 88.059/2 | 88.060/2 | 88.061/2 |
| GH 3,0mm | 88.059/3 | 88.060/3 | 88.061/3 |
| GH 4,0mm | 88.059/4 | 88.060/4 | 88.061/4 |

| EV/3.0 | EV/3.6 | EV/4.2 | EV/4.8 | EV/5.4 |
|--------|--------|--------|--------|--------|
| 3.0 | 3.6 | 4.2 | 4.8 | 5.4 |










UNIABUTMENT®

| | | | | |
|----------|--|----------|----------|----------|
| GH 1,0mm | | 40.059/1 | 40.060/1 | 40.061/1 |
| GH 2,0mm | | 40.059/2 | 40.060/2 | 40.061/2 |
| GH 3,0mm | | 40.059/3 | 40.060/3 | 40.061/3 |
| GH 5,0mm | | 40.059/5 | 40.060/5 | 40.061/5 |

UniAbutment® needs a 1,75mm hex screwdriver








MULTI-UNIT ABUTMENTS

| | | | | | | | |
|----------|-----|---|----------|----------|----------|----------|----------|
| GH 1,5mm | 0° |  | 40.406/1 | 40.027/1 | 40.036/1 | 40.037/1 | 40.407/1 |
| GH 2,5mm | 0° |  | 40.406/2 | 40.027/2 | 40.036/2 | 40.037/2 | 40.407/2 |
| GH 3,5mm | 0° |  | 40.406/3 | 40.027/3 | 40.036/3 | 40.037/3 | 40.407/3 |
| GH 3,5mm | 17° |  | | 41.727/3 | 41.736/3 | 41.737/3 | |
| GH 4,5mm | 17° |  | | 41.727/4 | 41.736/4 | 41.737/4 | |
| GH 4,5mm | 30° |  | | 43.027/4 | 43.036/4 | 43.037/4 | |
| GH 5,5mm | 30° |  | | 43.027/5 | 43.036/5 | 43.037/5 | |

4.8
MULTI-UNIT PLATFORM







TI-BASE

| | | | | | |
|-----------------|---|--------|--------|--------|--------|
| GH 1,0mm |  | 15.059 | 15.060 | 15.061 | 15.407 |
| GH 3,0mm |  | 15.359 | 15.360 | 15.361 | |
| GH 1,0mm |  | 16.059 | 16.060 | 16.061 | 16.407 |
| GH 3,0mm |  | 16.359 | 16.360 | 16.361 | |
| On uniabutment® |  | 15.058 | | | |



TI-BASE CASTABLES

| | | | | | |
|---------|---|-----------|-----------|-----------|-----------|
| 5 Pack. |  | 32.001-P5 | 32.001-P5 | 32.001-P5 | 32.001-P5 |
| 5 Pack. |  | 33.001-P5 | 33.001-P5 | 33.001-P5 | 33.001-P5 |
| 5 Pack. |  | 32.001-P5 | | | |



AURUMBase®

| | EV/3.0 | EV/3.6 | EV/4.2 | EV/4.8 | EV/5.4 |
|--|--------|--------|--------|--------|--------|
| | 3.0 | 3.6 | 4.2 | 4.8 | 5.4 |

On uniabutment®



36.058

| | | |
|--------|--------|--------|
| 36.059 | 36.060 | 36.061 |
| 37.059 | 37.060 | 37.061 |

PLASTIC SLEEVES FOR AURUMBase®



| | | | | |
|---------|-----|-----------|-----------|-----------|
| 5 Pack. | 0° | 33.100-P5 | 33.100-P5 | 33.100-P5 |
| 5 Pack. | 10° | 33.101-P5 | 33.101-P5 | 33.101-P5 |
| 5 Pack. | 20° | 33.102-P5 | 33.102-P5 | 33.102-P5 |



C-Base®

GH 1,0mm



| | | |
|--------|--------|--------|
| 58.059 | 58.060 | 58.061 |
|--------|--------|--------|

GH 3,0mm



| | | |
|----------|----------|----------|
| 58.059/3 | 58.060/3 | 58.061/3 |
|----------|----------|----------|

GH 1,0mm



| | | |
|--------|--------|--------|
| 59.059 | 59.060 | 59.061 |
|--------|--------|--------|


GH 3,0mm



| | | |
|----------|----------|----------|
| 59.059/3 | 59.060/3 | 59.061/3 |
|----------|----------|----------|

Includes screw, same as standard screw.

Libraries available for EXOCAD & 3Shape.



ELLIPTIBase®

A corner




56.406

B flat



57.406

**Torx® Screw
AURUMBase® & ELLIPTIBase®**



(replacement screw)

| | | | |
|--------|--------|--------|--------|
| 19.468 | 19.441 | 19.460 | 19.461 |
|--------|--------|--------|--------|

Recommended torque

| | | | |
|--------|--------|--------|--------|
| 15 Ncm | 25 Ncm | 25 Ncm | 25 Ncm |
|--------|--------|--------|--------|

On uniabutment®

19.331*


Recommended torque

15 Ncm

Torx® BALL SCREWDRIVER

| 20mm | 24mm | 30mm | 35mm |
|----------|----------|----------|----------|
| DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |






| | | EV/3.0 | EV/3.6 | EV/4.2 | EV/4.8 | EV/5.4 |
|---|---------------------------|---------|---------|---------|---------|---------|
| SCREW HEX 1,27mm | | 3.0 | 3.6 | 4.2 | 4.8 | 5.4 |
| | | 19.071 | 19.059 | 19.060 | 19.061 | 19.061 |
| | TIN | | 19.659* | 19.660* | 19.661* | 19.661* |
| | <i>Recommended torque</i> | 25 Ncm | 25 Ncm | 25 Ncm | 25 Ncm | 25 Ncm |
|  | On uniabutment® | 19.058 | | | | |
| | TIN | 19.658* | | | | |
| | <i>Recommended torque</i> | | 15 Ncm | 15 Ncm | 15 Ncm | |



| | | EV/3.0 | EV/3.6 | EV/4.2 | EV/4.8 | EV/5.4 |
|-------------------------|------|--------|--------|--------|--------|--------|
| PRE-MILLED BLANK | | | | | | |
| Ø 10mm | Ti | 61.406 | 61.059 | 61.060 | 61.061 | 61.407 |
| Ø 14mm | Ti | | 62.059 | 62.060 | 62.061 | 62.407 |
| Ø 14mm | CoCr | | 71.059 | 71.060 | 71.061 | 71.407 |



| | | EV/3.0 | EV/3.6 | EV/4.2 | EV/4.8 | EV/5.4 |
|------------------------|---|--------|--------|--------|--------|--------|
| CoCr BASE | | | | | | |
| |  | | 30.059 | 30.060 | 30.061 | |
| |  | | 31.059 | 31.060 | 31.061 | |
| On uniabutment® |  | 30.058 | | | | |



| | | EV/3.0 | EV/3.6 | EV/4.2 | EV/4.8 | EV/5.4 |
|------------------------|---|--------|--------|--------|--------|--------|
| CASTABLE | | | | | | |
| |  | | 28.059 | 28.060 | 28.061 | |
| On uniabutment® |  | 28.058 | | | | |



The ultimate Multi-Unit

1. A full thread on the connection cone means a more secure and stable prosthesis.


2. Vertical screw access facilitates placement, while allowing tightening to a maximum torque of 35Ncm* to prevent screw loosening and improve the stability of the Multi-Unit abutment.

*According to compatibility

100% compatible with the most popular system on the market.

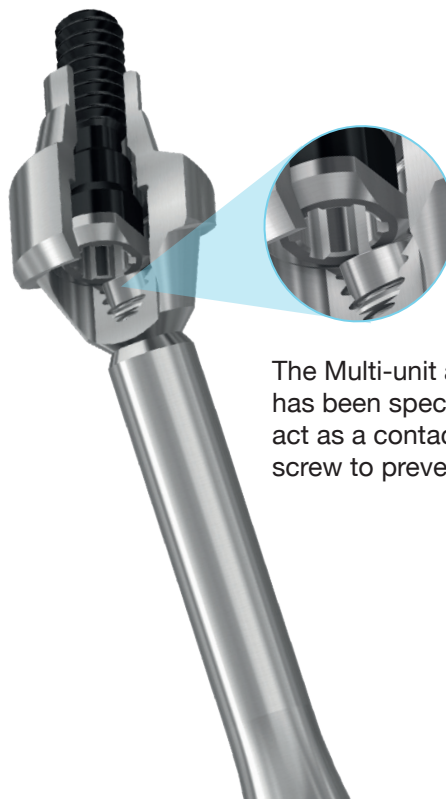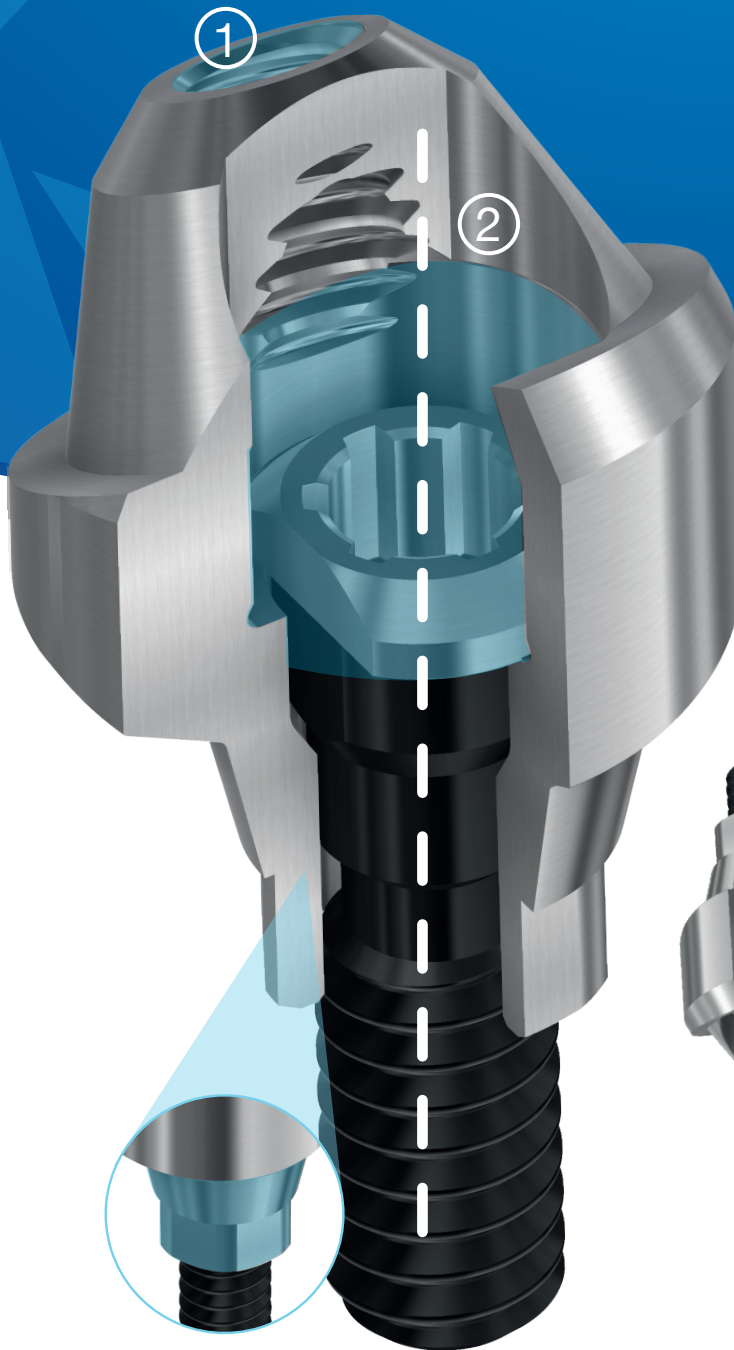

The Multi-unit angle conveyor has been specially designed to act as a contact point with the screw to prevent it from falling out.



INTERNAL HEX CONIC


compatible with
Astra Tech Osseospeed™

-  non-engaging
-  engaging







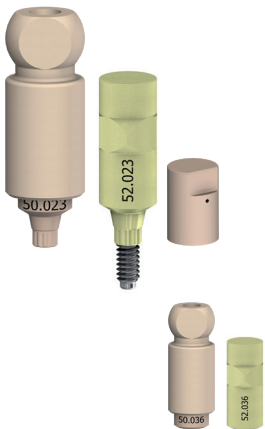



HEALING ABUTMENT

| | | | NP | RP | WP |
|-----------------|----------|-------|-----|----------|----------|
| | | | 3.0 | 3.5-4.0 | 4.5-5.0 |
| | GH 3,0mm | | | 20.024/3 | 20.025/3 |
| | GH 4,0mm | | | 20.024/4 | 20.025/4 |
| | GH 5,0mm | | | 20.024/5 | 20.025/5 |
| Anatomic | GH 4,0mm | Ø 4,5 | | 20.424/4 | |
| | GH 4,0mm | Ø 5,5 | | 20.524/4 | 20.525/4 |
| | GH 4,0mm | Ø 6,5 | | | 20.625/4 |



SCAN ABUTMENTS

| | | | | | |
|---|----------|---|------------|------------|------------|
|  | | | 50.023 | 50.024 | 50.025 |
|  | | | 52.023 | 52.024 | 52.025 |
|  | 10 Pack. |  | 53.100-P10 | 53.100-P10 | 53.100-P10 |
|  | 10 Pack. |  | 53.200-P10 | 53.200-P10 | 53.200-P10 |
| On uniabutment® | 20° | 50.036 | | | |
|  | 45° | 50.037 | | | |
| On uniabutment® | 20° | 52.036 | | | |
|  | 45° | 52.037 | | | |



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

| | | | | | |
|------------------------|-----|--------|--------|--------|--------|
| | | | 17.023 | 17.024 | 17.025 |
| On uniabutment® | 20° | 17.036 | | | |
| | 45° | 17.037 | | | |

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE

| NP | RP | WP |
|-----|---------|---------|
| 3.0 | 3.5-4.0 | 4.5-5.0 |



Platform Colour Coded

Retention screw Hex 1,27 mm*

Of uniabutment®

20°

14.036/D

14.023/D


14.024/D

14.025/D

45°

14.037/D

*Other retention screws available, see page 59



ANALOGUE



Platform Colour Coded

Of uniabutment®

10 Pack.

20°

14.036

14.023

14.024

14.025

10 Pack.

14.036-P10

14.024-P10

14.025-P10

45°

14.037

10 Pack.

14.037-P10



TEMPORARY ABUTMENT

On uniabutment®

20°

24.028

45°

24.029



24.024

24.025



25.024

25.025



DESSLoc®

| NP | RP | WP |
|-----|---------|---------|
| 3.0 | 3.5-4.0 | 4.5-5.0 |

| | | | |
|----------|----------|----------|----------|
| GH 1,0mm | 88.023/1 | 88.024/1 | 88.025/1 |
| GH 2,0mm | 88.023/2 | 88.024/2 | 88.025/2 |
| GH 3,0mm | 88.023/3 | 88.024/3 | 88.025/3 |
| GH 4,0mm | 88.023/4 | 88.024/4 | 88.025/4 |



UNIABUTMENT®

| | | | |
|----------|-----|----------|----------|
| GH 0,5mm | 20° | 40.013/0 | 40.015/0 |
| GH 1,0mm | 20° | 40.013/1 | 40.015/1 |
| GH 2,0mm | 20° | 40.013/2 | 40.015/2 |
| GH 4,0mm | 20° | 40.013/4 | 40.015/4 |
| GH 6,0mm | 20° | 40.013/6 | 40.015/6 |



| | | | |
|----------|-----|----------|----------|
| GH 0,5mm | 45° | 40.014/0 | 40.016/0 |
| GH 1,0mm | 45° | 40.014/1 | 40.016/1 |
| GH 2,0mm | 45° | 40.014/2 | 40.016/2 |
| GH 4,0mm | 45° | 40.014/4 | 40.016/4 |
| GH 6,0mm | 45° | 40.014/6 | 40.016/6 |



MULTI-UNIT ABUTMENTS

| | | | | |
|----------|-----|---|----------|----------|
| GH 1,5mm | 0° | ○ | 40.024/1 | 40.025/1 |
| GH 2,5mm | 0° | ○ | 40.024/2 | 40.025/2 |
| GH 3,5mm | 0° | ○ | 40.024/3 | 40.025/3 |
| GH 3,5mm | 17° | ⊗ | 41.724/3 | 41.725/3 |
| GH 4,5mm | 17° | ⊗ | 41.724/4 | 41.725/4 |
| GH 4,5mm | 30° | ⊗ | 43.024/4 | 43.025/4 |
| GH 5,5mm | 30° | ⊗ | 43.024/5 | 43.025/5 |



4.8
MULTI-UNIT PLATFORM

| | | | NP | RP | WP |
|----------------|----------|---|----------|----------|----------|
| | | | 3.0 | 3.5-4.0 | 4.5-5.0 |
| TI-BASE | | | | | |
| | GH 0,9mm | ○ | | | 15.025 |
| | GH 1,0mm | ○ | 15.023 | | |
| | GH 1,1mm | ○ | | 15.024 | |
| | GH 2,0mm | ○ | 15.023/2 | 15.024/2 | 15.025/2 |
| | GH 3,0mm | ○ | 15.023/3 | 15.324 | 15.325 |
| | GH 0,9mm | ○ | | | 16.025 |
| | GH 1,0mm | ○ | 16.023 | | |
| | GH 1,1mm | ○ | | 16.024 | |
| | GH 2,0mm | ○ | 16.023/2 | 16.024/2 | 16.025/2 |
| | GH 3,0mm | ○ | 16.023/3 | 16.324 | 16.325 |




| | | | | | |
|------------------------|-----|---|--------|--|--|
| On uniabutment® | 20° | ○ | 15.036 | | |
| | 45° | ○ | 15.037 | | |



TI-BASE CASTABLES

| | | | | |
|---------|---|-----------|-----------|-----------|
| 5 Pack. | ○ | 32.001-P5 | 32.001-P5 | 32.001-P5 |
| 5 Pack. | ○ | 33.001-P5 | 33.001-P5 | 33.001-P5 |

On uniabutment® 32.001-P5




AURUMBase®

| | | | | |
|--|---|--|--------|--------|
| | ○ | | 36.024 | 36.025 |
| | ○ | | 37.024 | 37.025 |

PLASTIC SLEEVES FOR AURUMBase®



| | | | | |
|---------|-----|--|-----------|-----------|
| 5 Pack. | 0° | | 33.100-P5 | 33.100-P5 |
| 5 Pack. | 10° | | 33.101-P5 | 33.101-P5 |
| 5 Pack. | 20° | | 33.102-P5 | 33.102-P5 |



| C-Base® | | NP | RP | WP |
|----------|---|-----|----------|----------|
| | | 3.0 | 3.5-4.0 | 4.5-5.0 |
| GH 0,8mm | ○ | | 58.024 | |
| GH 0,9mm | ○ | | | 58.025 |
| GH 3,0mm | ○ | | 58.024/3 | 58.025/3 |
| GH 0,8mm | ○ | | 59.024 | |
| GH 0,9mm | ○ | | | 59.025 |
| GH 3,0mm | ○ | | 59.024/3 | 59.025/3 |

Includes screw, same as standard screw.

Libraries available for EXOCAD & 3Shape.



| Torx® Screw AURUMBase® | | | |
|------------------------|--|--------|--------|
| (replacement screw) | | 19.441 | 19.425 |
| Recommended torque | | 20 Ncm | 25 Ncm |



| Torx® BALL SCREWDRIVER | 20mm | 24mm | 30mm | 35mm |
|------------------------|----------|----------|----------|----------|
| | DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |



| ABUTMENTS | | | |
|-----------|-----|---------|---------|
| | 0° | 13.024 | 13.025 |
| | 15° | 22.024* | 22.025* |
| | 25° | 23.024* | |



SCREW HEX 1,27mm

| | NP | RP | WP |
|--|-----|---------|---------|
| | 3.0 | 3.5-4.0 | 4.5-5.0 |

| | | | |
|----------|---------|------------|------------|
| | 19.015 | 19.016 | 19.017 |
| 10 Pack. | | 19.016-P10 | 19.017-P10 |
| TIN | 19.615* | 19.616* | 19.617* |

Recommended torque 15 Ncm 20 Ncm 25 Ncm



| | | | |
|------------------------|------------|--|--|
| On uniabutment® | 19.018* | | |
| 10 Pack. | 19.018-P10 | | |
| TIN | 19.618* | | |

Recommended torque 15 Ncm



PRE-MILLED BLANK

| | | | | |
|--------|------|--------|--------|--------|
| Ø 10mm | Ti | 61.023 | 61.024 | 61.025 |
| Ø 14mm | Ti | | 62.024 | 62.025 |
| Ø 14mm | CoCr | | 71.024 | 71.025 |



CoCr BASE

| | | | | | |
|------------------------|-----|---|--------|--------|--------|
| | | ○ | | 30.024 | 30.025 |
| | | ○ | | 31.024 | 31.025 |
| On uniabutment® | 20° | ○ | 30.036 | | |
| | 45° | ○ | 30.037 | | |



CASTABLE

| | | | | | |
|------------------------|-----|---|------------|------------|------------|
| | | ○ | | 28.024 | 28.025 |
| 10 Pack. | | | | 11.024-P10 | 11.025-P10 |
| | | ○ | | 29.024 | 29.025 |
| 10 Pack. | | | | 12.024-P10 | 12.025-P10 |
| On uniabutment® | 20° | ○ | 28.036 | | |
| 10 Pack. | | | 11.036-P10 | | |
| On uniabutment® | 45° | ○ | 28.037 | | |
| 10 Pack. | | | 11.037-P10 | | |



INTERNAL HEX FD


compatible with
Xive®

○ non-engaging

⬡ engaging




| HEALING ABUTMENT | NP | RP | WP | 5.5 |
|---------------------|----------|----------|----------|-----|
| | 3.4 | 3.8 | 4.5 | 5.5 |
| GH 3,0mm | 20.036/3 | 20.037/3 | 20.038/3 | |
| GH 4,0mm | 20.036/4 | 20.037/4 | 20.038/4 | |
| GH 5,0mm | 20.036/5 | 20.037/5 | 20.038/5 | |



SCAN ABUTMENTS

| | ○ | 50.038 | 50.039 | 50.040 | 50.071 |
|--|---|----------|------------|------------|------------|
| | | | | | |
| | ⬡ | 52.038 | 52.039 | 52.040 | 52.071 |
| | | 10 Pack. | 53.100-P10 | 53.100-P10 | 53.100-P10 |
| | | 10 Pack. | 53.200-P10 | 53.200-P10 | 53.200-P10 |



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

| 17.038 | 17.039 | 17.040 | 17.071 |
|--------|--------|--------|--------|
|--------|--------|--------|--------|

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE

| NP | RP | WP | 5.5 |
|-----|-----|-----|-----|
| 3.4 | 3.8 | 4.5 | 5.5 |



Platform Colour Coded

Retention screw Hex 1,27 mm*

*Other retention screws available, see page 59

| | | | |
|----------|----------|----------|----------|
| 14.038/D | 14.039/D | 14.040/D | 14.071/D |
|----------|----------|----------|----------|




ANALOGUE



Platform Colour Coded

| | | | |
|----------|------------|--------|--------|
| 14.038 | 14.039 | 14.040 | 14.071 |
| 10 Pack. | 14.039-P10 | | |



TEMPORARY ABUTMENT







| | | | |
|---|--------|--------|--------|
| ○ | 24.038 | 24.039 | 24.040 |
| ⬡ | 25.038 | 25.039 | 25.040 |



DESSLoc®



| | | |
|----------|----------|----------|
| GH 1,0mm | 88.036/1 | 88.037/1 |
| GH 2,0mm | 88.036/2 | 88.037/2 |
| GH 3,0mm | 88.036/3 | 88.037/3 |
| GH 4,0mm | 88.036/4 | 88.037/4 |




| | | NP | RP | WP | 5.5 |
|----------------|---|--------|--------|--------|--------|
| | | 3.4 | 3.8 | 4.5 | 5.5 |
| TI-BASE | | | | | |
| GH 0,3mm |  | 15.038 | 15.039 | 15.040 | 15.071 |
| GH 1,5mm |  | 15.238 | 15.239 | 15.240 | 15.271 |
| GH 3,0mm |  | 15.338 | 15.339 | 15.340 | 15.371 |
| GH 0,3mm |  | 16.038 | 16.039 | 16.040 | 16.071 |
| GH 1,5mm |  | 16.238 | 16.239 | 16.240 | 16.271 |
| GH 3,0mm |  | 16.338 | 16.339 | 16.340 | 16.371 |





TI-BASE CASTABLES

| | | | | | |
|---------|---|-----------|-----------|-----------|-----------|
| 5 Pack. |  | 32.001-P5 | 32.001-P5 | 32.001-P5 | 32.001-P5 |
| 5 Pack. |  | 33.001-P5 | 33.001-P5 | 33.001-P5 | 33.001-P5 |




AURUMBase®









| | | | |
|---|--------|--------|--------|
|  | 36.038 | 36.039 | 36.040 |
|  | 37.038 | 37.039 | 37.040 |

PLASTIC SLEEVES FOR AURUMBase®



| | | | | |
|---------|-----|-----------|-----------|-----------|
| 5 Pack. | 0° | 33.100-P5 | 33.100-P5 | 33.100-P5 |
| 5 Pack. | 10° | 33.100-P5 | 33.101-P5 | 33.101-P5 |
| 5 Pack. | 20° | 33.100-P5 | 33.102-P5 | 33.102-P5 |



| | | NP | RP | WP | 5.5 |
|----------------|----------|---|----------|----------|-------------------|
| | | 3.4 | 3.8 | 4.5 | 5.5 |
| C-Base® | | | | | |
| | GH 0,3mm |  | 58.038 | 58.039 | |
| | GH 0,6mm |  | | | 58.040 58.071 |
| | GH 1,5mm |  | 58.038/2 | 58.039/2 | 58.040/2 58.071/2 |
| | GH 3,0mm |  | 58.038/3 | 58.039/3 | 58.040/3 58.071/3 |
| | GH 0,3mm |  | 59.038 | 59.039 | |
| | GH 0,6mm |  | | | 59.040 59.071 |
| | GH 1,5mm |  | 59.038/2 | 59.039/2 | 59.040/2 59.071/2 |
| | GH 3,0mm |  | 59.038/3 | 59.039/3 | 59.040/3 59.071/3 |

Includes screw, same as standard screw.

Libraries available for EXOCAD & 3Shape.



Torx® Screw AURUMBase®

(replacement screw)

Recommended torque

| | | |
|--------|--------|--------|
| 19.438 | 19.438 | 19.438 |
| 24 Ncm | 24 Ncm | 24 Ncm |

Torx® BALL SCREWDRIVER



| | 20mm | 24mm | 30mm | 35mm |
|--|----------|----------|----------|----------|
| | DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |



ABUTMENTS

| | | | |
|-----|---------|---------|---------|
| 0° | 13.038 | 13.039 | 13.040 |
| 15° | 22.038* | 22.039* | 22.040* |
| 25° | | 23.039* | |





| | NP | RP | WP | 5.5 |
|---------------------------|---------------|---------------|---------------|---------------|
| SCREW HEX 1,22mm | 3.4 | 3.8 | 4.5 | 5.5 |
| | 19.024 | 19.024 | 19.024 | 19.024 |
| 10 Pack. | 19.024-P10 | 19.024-P10 | 19.024-P10 | 19.024-P10 |
| TIN | 19.624* | 19.624* | 19.624* | 19.624* |
| <i>Recommended torque</i> | <i>24 Ncm</i> | <i>24 Ncm</i> | <i>24 Ncm</i> | <i>24 Ncm</i> |





| PRE-MILLED BLANK | | | | | |
|-------------------------|------|--------|--------|--------|--------|
| Ø 10mm | Ti | 61.038 | 61.039 | 61.040 | 61.071 |
| Ø 14mm | Ti | | 62.039 | 62.040 | 62.071 |
| Ø 14mm | CoCr | 71.038 | 71.039 | 71.040 | 71.071 |



| CoCr BASE | | | | | |
|------------------|---|--------|--------|--------|--|
| |  | 30.038 | 30.039 | 30.040 | |
| |  | 31.038 | 31.039 | 31.040 | |



| CASTABLE | | | | | |
|-----------------|---|--------|------------|--------|--|
| |  | 28.038 | 28.039 | 28.040 | |
| 10 Pack. | | | 11.039-P10 | | |
| | | 29.038 | 29.039 | 29.040 | |
| 10 Pack. |  | | 12.039-P10 | | |



DESSLoc®


**Superior resistance,
better clinical results**

DESS® overdenture system has a Zirconium Nitride coating, which offers improved strength with less plaque adhesion, improving clinical outcomes and reducing gingival inflammation.


- 100% compatible with the most widely used system.
- Reduces plaque adhesion.
- Reduces gingival inflammation.



Includes carrier for easy positioning.

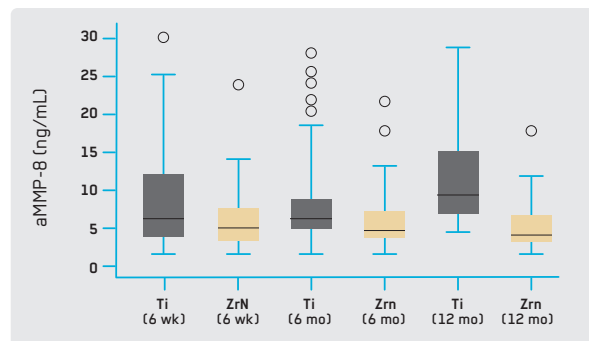

aMMP-8 values of peri-implant sulcus fluid in titanium (Ti) and zirconium nitride (ZrN) coated attachments at different times after prosthetic restoration. (Matrix Metalloproteinase-8 Levels in Peri-implant Sulcus Fluid Adjacent to Titanium and Zirconium Nitride Surface, Richard Meissen, MSc1 Mariana Mintcheva, MSc1 Lutz Netuschil, PhD Dr2, Int J Periodontics Restorative Dent 2014; 34:91-95. doi: 10.11607/prd.1504)



INTERNAL ANK

○ non-engaging

⬡ engaging

compatible with
Dentsply Ankylos® C/X








HEALING ABUTMENT

| | |
|----------|----------|
| GH 1,5mm | 20.046/1 |
| GH 2,5mm | 20.046/3 |



SCAN ABUTMENTS

| | | |
|---|----------|------------|
|  | ○ | 50.049 |
|  | ⬡ | 52.049 |
|  | 10 Pack. | 53.100-P10 |
|  | 10 Pack. | 53.200-P10 |

 52.xxx includes manual tool DTPEIPEEK.



TRANSFER

| | |
|----------|--------|
| GH 1,5mm | 17.049 |
| GH 2,5mm | 17.250 |

Transfers include two screws (for open and closed tray).




DIGITAL ANALOGUE


| | | | |
|--|------------------------------|-------|----------|
|  Platform Colour Coded | Retention screw Hex 1,27 mm* | Ø 3,5 | 14.048/D |
| | | Ø 4,5 | 14.049/D |

*Other retention screws available, see page 59







ANALOGUE

| | | | |
|--|--|----------|------------|
|  Platform Colour Coded | | Ø 3,5 | 14.048 |
| | | 10 Pack. | 14.048-P10 |
| | | Ø 4,5 | 14.049 |
| | | 10 Pack. | 14.049-P10 |



TEMPORARY ABUTMENT

| | | |
|----------|---|--------|
| GH 1,5mm |  | 24.048 |
| GH 2,5mm |  | 24.250 |
| GH 1,5mm |  | 25.048 |
| GH 2,5mm |  | 25.250 |



DESSLoc®

| | |
|----------|----------|
| GH 2,0mm | 88.046/2 |
| GH 3,0mm | 88.046/3 |
| GH 4,0mm | 88.046/4 |



TI-BASE

| | | |
|----------|---|--------|
| GH 1,5mm |  | 15.050 |
| GH 2,5mm |  | 15.250 |
| GH 1,5mm |  | 16.050 |
| GH 2,5mm |  | 16.250 |







TI-BASE CASTABLES

| | | |
|---------|---|-----------|
| 5 Pack. |  | 32.001-P5 |
| 5 Pack. |  | 33.001-P5 |



C-Base®

| | | |
|----------|---|----------|
| GH 1,4mm |  | 58.050 |
| GH 2,5mm |  | 58.050/2 |
| GH 1,4mm |  | 59.050 |
| GH 2,5mm |  | 59.050/2 |

Includes screw, same as standard screw.

Libraries available for EXOCAD & 3Shape.



Replacement Screw for C-Base®

19.702

Recommended torque

15 Ncm



ABUTMENTS

| | | |
|----------|-----|---------|
| GH 1,5mm | 0° | 13.047 |
| GH 2,5mm | 0° | 13.250 |
| GH 1,5mm | 15° | 22.048* |
| GH 2,5mm | 15° | 22.250* |
| GH 1,5mm | 25° | 23.048* |
| GH 2,5mm | 25° | 23.250* |



SCREW HEX 1,00mm

| | | |
|---------------------------|--|---------------|
| GH 1,5mm | | 19.048 |
| 10 Pack. | | 19.048-P10 |
| Tin | | 19.648* |
| GH 2,5mm | | 19.050 |
| <i>Recommended torque</i> | | <i>15 Ncm</i> |






PRE-MILLED BLANK

| | | |
|--------|------|--------|
| Ø 10mm | Ti | 61.250 |
| Ø 14mm | CoCr | 71.250 |




CoCr BASE

| | | |
|----------|---|--------|
| GH 1,5mm |  | 30.050 |
| GH 2,5mm |  | 30.250 |
| GH 1,5mm |  | 31.050 |
| GH 2,5mm |  | 31.250 |



CASTABLE

| | | |
|----------|---|--------|
| GH 1,5mm |  | 28.048 |
| GH 2,5mm |  | 28.250 |




CONIC OSS

compatible with

Osstem® TS / HIOSSEN® ET

○ non-engaging

◻ engaging



SCAN ABUTMENTS



10 Pack. ○

10 Pack. ◻

Mini

STD

Mini

Regular

50.072

50.073

52.072


52.073

53.100-P10


53.100-P10

53.200-P10

53.200-P10



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

17.072

17.073

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE

Platform Colour Coded

Retention screw Hex 1,27 mm*

14.072/D

14.073/D

*Other retention screws available, see page 59




ANALOGUE

Platform Colour Coded

14.072

14.073



TEMPORARY ABUTMENT

Mini **STD**

Mini **Regular**

| | | | 24.072 | 24.073 |
|--|---|--|--------|--------|
| | ○ | | | |
| | ○ | | 25.072 | 25.073 |



MULTI-UNIT ABUTMENTS

| | | | | |
|----------|-----|---|-----------|-----------|
| GH 1,5mm | 0° | ○ | 40.072/1 | 40.073/1 |
| GH 2,5mm | 0° | ○ | 40.072/2 | 40.073/2 |
| GH 3,5mm | 0° | ○ | 40.072/3 | 40.073/3 |
| GH 2,5mm | 17° | ○ | 41.772/2* | 41.773/2* |
| GH 3,5mm | 17° | ○ | 41.772/3* | 41.773/3* |
| GH 3,5mm | 30° | ○ | 43.072/3* | 43.073/3* |
| GH 4,5mm | 30° | ○ | 43.072/4* | 43.073/4* |

4.8
MULTI-UNIT PLATFORM



TI-BASE

| | | | |
|----------|---|--------|--------|
| GH 1,0mm | ○ | 15.072 | 15.073 |
| GH 3,0mm | ○ | 15.372 | 15.373 |
| GH 1,0mm | ○ | 16.072 | 16.073 |
| GH 3,0mm | ○ | 16.372 | 16.373 |



TI-BASE CASTABLES

| | | | |
|---------|---|-----------|-----------|
| 5 Pack. | ○ | 32.001-P5 | 32.001-P5 |
| 5 Pack. | ○ | 33.001-P5 | 33.001-P5 |



AURUMBase®

Mini **STD**

Mini **Regular**



36.072

36.073



37.072

37.073

PLASTIC SLEEVES FOR AURUMBase®



5 Pack.

0°

33.100-P5

33.100-P5

5 Pack.

10°

33.101-P5


33.101-P5

5 Pack.

20°

33.102-P5

33.102-P5



C-Base®

GH 1,0mm



58.072

58.073

GH 3,0mm



58.072/3*

58.073/3*

GH 1,0mm



59.072

59.073

GH 3,0mm



59.072/3

59.073/3

Includes screw, same as standard screw.

Libraries available for EXOCAD & 3Shape.



Torx® Screw AURUMBase®

(replacement screw)

19.444

19.461

Recommended torque

20 Ncm

25 Ncm

Torx® BALL SCREWDRIVER



20mm

24mm

30mm

35mm

DT20TB06

DT24TB06

DT30TB06

DT35TB06



SCREW HEX 1,22mm

| | | Mini | STD |
|---------------------------|-----|---------|---------|
| | | Mini | Regular |
| | | 19.072 | 19.073 |
| | DLC | 19.272* | 19.273* |
| | TIN | 19.672* | 19.673* |
| <i>Recommended torque</i> | | 20 Ncm | 30 Ncm |




PRE-MILLED BLANK

| | | | |
|--------|------|--------|--------|
| Ø 10mm | Ti | 61.072 | 61.073 |
| Ø 14mm | Ti | 62.072 | 62.073 |
| Ø 14mm | CoCr | 71.072 | 71.073 |



CoCr BASE

| | | | |
|--|---|--------|--------|
| | ○ | 30.072 | 30.073 |
| | ○ | 31.072 | 31.073 |



INTERNAL CAM

compatible with
Camlog®


○ non-engaging

⊕ engaging



HEALING ABUTMENT

| | 3.3 | 3.8 | 4.3 | 5.0 |
|----------|----------|----------|-----|-----|
| GH 3,0mm | 20.065/3 | 20.066/3 | | |
| GH 4,0mm | 20.065/4 | 20.066/4 | | |
| GH 5,0mm | 20.065/5 | 20.066/5 | | |



SCAN ABUTMENTS

| | 50.064 | 50.065 | 50.066 | 50.067 |
|------------|------------|------------|------------|------------|
| | 52.064 | 52.065 | 52.066 | 52.067 |
| | 53.100-P10 | 53.100-P10 | 53.100-P10 | 53.100-P10 |
| 10 Pack. ○ | 53.200-P10 | 53.200-P10 | 53.200-P10 | 53.200-P10 |
| 10 Pack. ⊕ | | | | |



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

| | 17.064 | 17.065 | 17.066 | 17.067 |
|--|--------|--------|--------|--------|
| | | | | |

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE



Platform Colour Coded

Retention screw Hex 1,27 mm*

*Other retention screws available, see page 59

| | 3.3 | 3.8 | 4.3 | 5.0 |
|--|----------|----------|----------|----------|
| | 3.3 | 3.8 | 4.3 | 5.0 |
| | 14.064/D | 14.065/D | 14.066/D | 14.067/D |



ANALOGUE



Platform Colour Coded

| | | | | |
|--|--------|--------|--------|--------|
| | 14.064 | 14.065 | 14.066 | 14.067 |
|--|--------|--------|--------|--------|



TEMPORARY ABUTMENT



24.065 24.066











25.065 25.066



DESSLoc®



| | | |
|----------|----------|----------|
| GH 1,0mm | 88.065/1 | 88.066/1 |
| GH 2,0mm | 88.065/2 | 88.066/2 |
| GH 3,0mm | 88.065/3 | 88.066/3 |
| GH 4,0mm | 88.065/4 | 88.066/4 |




| | | | 3.3 | 3.8 | 4.3 | 5.0 |
|----------------|---|--------|-----|--------|--------|--------|
| TI-BASE | | | 3.3 | 3.8 | 4.3 | 5.0 |
| GH 0,3mm |  | | | 15.065 | 15.066 | 15.067 |
| GH 0,5mm |  | 15.064 | | | | |
| GH 1,5mm |  | | | 15.265 | 15.266 | |
| GH 3,0mm |  | | | 15.365 | 15.366 | |
| GH 0,3mm |  | | | 16.065 | 16.066 | 16.067 |
| GH 0,5mm |  | 16.064 | | | | |
| GH 1,5mm |  | | | 16.265 | 16.266 | |
| GH 3,0mm |  | | | 16.365 | 16.366 | |




TI-BASE CASTABLES

| | | | | | |
|---------|---|-----------|-----------|-----------|-----------|
| 5 Pack. |  | 32.001-P5 | 32.001-P5 | 32.001-P5 | 32.001-P5 |
| 5 Pack. |  | 33.001-P5 | 33.001-P5 | 33.001-P5 | 33.001-P5 |



AURUMBase®

| | | | |
|--|---|--------|--------|
| |  | 36.065 | 36.066 |
| |  | 37.065 | 37.066 |

PLASTIC SLEEVES FOR AURUMBase®



| | | | |
|---------|-----|-----------|-----------|
| 5 Pack. | 0° | 33.100-P5 | 33.100-P5 |
| 5 Pack. | 10° | 33.101-P5 | 33.101-P5 |
| 5 Pack. | 20° | 33.102-P5 | 33.102-P5 |



Torx® Screw AURUMBase®

| | | | |
|---------------------|--|--------|--------|
| (replacement screw) | | 19.444 | 19.444 |
| Recommended torque | | 20 Ncm | 20 Ncm |

| | 3.3 | 3.8 | 4.3 | 5.0 |
|--|------|------|------|------|
| | 3.3 | 3.8 | 4.3 | 5.0 |
| | 20mm | 24mm | 30mm | 35mm |

Torx® BALL SCREWDRIVER



| | | | |
|----------|----------|----------|----------|
| DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |
|----------|----------|----------|----------|



SCREW HEX 1,27mm

| | | | | |
|---------------------------|---------------|---------------|---------------|---------------|
| | 19.044 | 19.044 | 19.044 | 19.045 |
| TIN | 19.644* | 19.644* | 19.644* | 19.645* |
| <i>Recommended torque</i> | <i>20 Ncm</i> | <i>20 Ncm</i> | <i>20 Ncm</i> | <i>20 Ncm</i> |





PRE-MILLED BLANK

| | | | | | |
|--------|------|--------|--------|--------|--------|
| Ø 10mm | Ti | 61.064 | 61.065 | 61.066 | 61.067 |
| Ø 14mm | Ti | | 62.065 | 62.066 | 62.067 |
| Ø 14mm | CoCr | 71.064 | 71.065 | 71.066 | 71.067 |





CoCr BASE

| | | |
|---|--------|--------|
|  | 30.065 | 30.066 |
|  | 31.065 | 31.066 |



CASTABLE

| | | |
|---|--------|--------|
|  | 28.065 | 28.066 |
|---|--------|--------|



INTERNAL CON

compatible with
Conelog®

○ non-engaging

⊕ engaging



SCAN ABUTMENTS



10 Pack. ○

10 Pack. ⊕

NP

RP

WP

3.3

3.8/4.3

5.0

52.074

52.075

52.076

53.100-P10

53.100-P10

53.100-P10

53.200-P10

53.200-P10

53.200-P10



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

17.074

17.075

17.076

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE



Platform Colour Coded

Retention screw Hex 1,27 mm*

14.074/D

14.075/D

14.076/D

*Other retention screws available, see page 59



ANALOGUE



Platform Colour Coded

14.074

14.075


14.076



| | | NP | RP | WP |
|----------------|---|-----------|-----------|-----------|
| | | 3.3 | 3.8/4.3 | 5.0 |
| TI-BASE | | | | |
| GH 1,4mm | ○ | 15.074* | 15.075* | 15.076* |
| GH 3,0mm | ○ | 15.074/3* | 15.075/3* | 15.076/3* |
| GH 1,4mm | ⊗ | 16.074* | 16.075* | 16.076* |
| GH 3,0mm | ⊗ | 16.074/3* | 16.075/3* | 16.076/3* |



| TI-BASE CASTABLES | | | | |
|--------------------------|---|-----------|-----------|-----------|
| 5 Pack. | ○ | 32.001-P5 | 32.001-P5 | 32.001-P5 |
| 5 Pack. | ⊗ | 33.001-P5 | 33.001-P5 | 33.001-P5 |







| AURUMBase® | | | | |
|-------------------|---|---------|---------|---------|
| | ○ | 36.074* | 36.075* | 36.076* |
| | ⊗ | 37.074* | 37.075* | 37.076* |



| PLASTIC SLEEVES FOR AURUMBase® | | | | |
|---------------------------------------|-----|-----------|-----------|-----------|
| 5 Pack. | 0° | 33.100-P5 | 33.100-P5 | 33.100-P5 |
| 5 Pack. | 10° | 33.101-P5 | 33.101-P5 | 33.101-P5 |
| 5 Pack. | 20° | 33.102-P5 | 33.102-P5 | 33.102-P5 |



C-Base®

| | | NP | RP | WP |
|----------|---|-----------|-----------|-----------|
| | | 3.3 | 3.8/4.3 | 5.0 |
| GH 1,0mm |  | 58.074* | 58.075* | 58.076* |
| GH 2,1mm |  | 58.074/2* | 58.075/2* | 58.076/2* |
| GH 1,0mm |  | 59.074* | 59.075* | 59.076* |
| GH 2,1mm |  | 59.074/2* | 59.075/2* | 59.076/2* |

Includes screw, same as standard screw.

Libraries available for EXOCAD & 3Shape.



Replacement Screw for C-Base®

| | | | | |
|---------------------------|--|---------------|---------------|---------------|
| | | 19.052* | 19.052* | 19.053* |
| <i>Recommended torque</i> | | <i>20 Ncm</i> | <i>20 Ncm</i> | <i>20 Ncm</i> |



Torx® Screw AURUMBase®

| | | | | |
|----------------------------|--|---------------|---------------|---------------|
| <i>(replacement screw)</i> | | 19.474* | 19.474* | 19.476* |
| <i>Recommended torque</i> | | <i>20 Ncm</i> | <i>20 Ncm</i> | <i>20 Ncm</i> |



Torx® BALL SCREWDRIVER

| | 20mm | 24mm | 30mm | 35mm |
|--|----------|----------|----------|----------|
| | DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |

**SCREW HEX 1,27mm**

| | NP | RP | WP |
|---------------------------|---------------|----------------|---------------|
| | 3.3 | 3.8/4.3 | 5.0 |
| | 19.074* | 19.074* | 19.076* |
| TIN | 19.674* | 19.674* | 19.676* |
| <i>Recommended torque</i> | <i>20 Ncm</i> | <i>20 Ncm</i> | <i>20 Ncm</i> |

**PRE-MILLED BLANK**

| | | | | |
|--------|------|---------|---------|---------|
| Ø 10mm | Ti | 61.074* | 61.075* | 61.076* |
| Ø 14mm | Ti | 62.074* | 62.075* | 62.076* |
| Ø 14mm | CoCr | 71.074* | 71.075* | 71.076* |



INTERNAL HEX BH

compatible with
BioHorizons® internal

○ non-engaging


⬡ engaging



HEALING ABUTMENT

| | 3.0 | NP | RP | WP |
|--|-----|-----|-----|-----|
| | 3.0 | 3.5 | 4.5 | 5.7 |

| | | | | |
|----------|--|----------|----------|----------|
| GH 3,0mm | | 20.087/3 | 20.088/3 | 20.089/3 |
| GH 4,0mm | | 20.087/4 | 20.088/4 | 20.089/4 |
| GH 5,0mm | | 20.087/5 | 20.088/5 | 20.089/5 |



SCAN ABUTMENTS



| | | 52.099 | 52.087 | 52.088 | 52.089 |
|------------|--|--------|------------|------------|------------|
| 10 Pack. ○ | | | 53.100-P10 | 53.100-P10 | 53.100-P10 |
| 10 Pack. ⬡ | | | 53.200-P10 | 53.200-P10 | 53.200-P10 |



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

| | | | |
|--|--------|--------|--------|
| | 17.087 | 17.088 | 17.089 |
|--|--------|--------|--------|

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE



Platform Colour Coded

Retention screw Hex 1,27 mm*

| | | | |
|----------|----------|----------|----------|
| 14.099/D | 14.087/D | 14.088/D | 14.089/D |
|----------|----------|----------|----------|

*Other retention screws available, see page 59




ANALOGUE

| 3.0 | NP | RP | WP |
|--------|--------|--------|--------|
| 3.0 | 3.5 | 4.5 | 5.7 |
| 14.099 | 14.087 | 14.088 | 14.089 |



DESSLoc®

| | | |
|----------|----------|----------|
| GH 1,0mm | 88.087/1 | 88.088/1 |
| GH 2,5mm | 88.087/2 | 88.088/2 |
| GH 3,5mm | 88.087/3 | 88.088/3 |
| GH 4,5mm | 88.087/4 | 88.088/4 |
| GH 5,5mm | 88.087/5 | |





TI-BASE

| | | | |
|----------|---|--------|--------|
| GH 0,3mm | ○ | 15.088 | 15.089 |
| GH 0,8mm | ○ | 15.087 | |
| GH 0,3mm | ⬡ | 16.088 | 16.089 |
| GH 0,8mm | ⬡ | 16.087 | |












TI-BASE CASTABLES

| | | | | |
|---------|---|-----------|-----------|-----------|
| 5 Pack. | ○ | 32.001-P5 | 32.001-P5 | 32.001-P5 |
| 5 Pack. | ⬡ | 33.001-P5 | 33.001-P5 | 33.001-P5 |





MULTI-UNIT ABUTMENTS

| | | | 3.0 | NP | RP | WP |
|----------|-----|---|-----|-----------|----------|-----|
| | | | 3.0 | 3.5 | 4.5 | 5.7 |
| GH 1,0mm | 0° |  | | 40.087/1 | 40.088/1 | |
| GH 2,0mm | 0° |  | | 40.087/2 | 40.088/2 | |
| GH 3,0mm | 0° |  | | 40.087/3 | 40.088/3 | |
| GH 4,0mm | 0° |  | | 40.087/4 | | |
| GH 5,0mm | 0° |  | | 40.087/5 | | |
| GH 2,5mm | 17° |  | | 41.787/2* | 41.720/2 | |
| GH 3,5mm | 17° |  | | 41.787/3* | 41.720/3 | |
| GH 3,5mm | 30° |  | | 43.087/3* | 43.020/3 | |
| GH 4,5mm | 30° |  | | 43.087/4* | 43.020/4 | |

4.8
MULTI-UNIT PLATFORM



AURUMBase®


| | | | | | | |
|--|--|---|--|--------|--------|--------|
| | |  | | 36.087 | 36.088 | 36.089 |
| | |  | | 37.087 | 37.088 | 37.089 |





PLASTIC SLEEVES FOR AURUMBase®

| | | | | | | |
|---|---------|-----|--|-----------|-----------|-----------|
|  | 5 Pack. | 0° | | 33.100-P5 | 33.100-P5 | 33.100-P5 |
|  | 5 Pack. | 10° | | 33.101-P5 | 33.101-P5 | 33.101-P5 |
|  | 5 Pack. | 20° | | 33.102-P5 | 33.102-P5 | 33.102-P5 |

ELLIPTIBase®

| | | |
|-----------------|---|--------|
| A corner |  | 56.099 |
| B flat |  | 57.099 |



| | | 3.0 | NP | RP | WP |
|----------------|---|-----|----------|----------|----------|
| | | 3.0 | 3.5 | 4.5 | 5.7 |
| C-Base® | | | | | |
| GH 0,5mm |  | | 58.087 | 58.088 | 58.089 |
| GH 3,0mm |  | | 58.087/3 | 58.088/3 | 58.089/3 |
| GH 0,5mm |  | | 59.087 | 59.088 | 59.089 |
| GH 3,0mm |  | | 59.087/3 | 59.088/3 | 59.089/3 |

Includes screw, same as standard screw.

Libraries available for EXOCAD & 3Shape.

Torx® Screw
AURUMBase® & ELLIPTIBase®



| | 19.400 | 19.417 | 19.417 | 19.417 |
|---------------------|--------|--------|--------|--------|
| (replacement screw) | | | | |
| Recommended torque | 30 Ncm | 30 Ncm | 30 Ncm | 30 Ncm |

Torx® BALL SCREWDRIVER



| | 20mm | 24mm | 30mm | 35mm |
|--|----------|----------|----------|----------|
| | DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |



SCREW HEX 1,27mm

| | 19.043 | 19.043 | 19.043 | 19.043 |
|--------------------|---------|---------|---------|---------|
| TIN | 19.643* | 19.643* | 19.643* | 19.643* |
| Recommended torque | 30 Ncm | 30 Ncm | 30 Ncm | 30 Ncm |



PRE-MILLED BLANK

| | | | | | |
|--------|----|--------|--------|--------|--------|
| Ø 10mm | Ti | 61.099 | 61.087 | 61.088 | 61.089 |
| Ø 14mm | Ti | | | 62.088 | 62.089 |



EXTERNAL HEX BH

compatible with
BioHorizons® External


○ non-engaging

⬡ engaging



HEALING ABUTMENT

| | NP | RP | WP |
|----------|-----------|-----------|-----------|
| | 3.7 | 4.2 | 5.2 |
| GH 3,0mm | 20.020/3* | 20.021/3* | 20.022/3* |
| GH 4,0mm | 20.020/4* | 20.021/4* | 20.022/4* |
| GH 5,0mm | 20.020/5* | 20.021/5* | 20.022/5* |



SCAN ABUTMENTS

| | NP | RP | WP |
|------------|------------|------------|------------|
| | 50.020 | 50.021 | 50.022 |
| | 52.020 | 52.021 | 52.022 |
| 10 Pack. ○ | 53.100-P10 | 53.100-P10 | 53.100-P10 |
| 10 Pack. ⬡ | 53.200-P10 | 53.200-P10 | 53.200-P10 |

52.xxx includes manual tool DTPEIPEEK.



TRANSFER

| | NP | RP | WP |
|--|--------|--------|--------|
| | 17.020 | 17.021 | 17.022 |

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE

| NP | RP | WP |
|-----|-----|-----|
| 3.7 | 4.2 | 5.2 |



Retention screw Hex 1,27 mm*

*Other retention screws available, see page 59

| | | |
|----------|----------|----------|
| 14.020/D | 14.021/D | 14.022/D |
|----------|----------|----------|



ANALOGUE



Platform Colour Coded

10 Pack.

| | | |
|--------|--------|--------|
| 14.020 | 14.021 | 14.022 |
|--------|--------|--------|

14.021-P10



TEMPORARY ABUTMENT

| | | | |
|---|---------|---------|---------|
| ○ | 24.020* | 24.021* | 24.022* |
| ⬡ | 25.020* | 25.021* | 25.022* |



TI-BASE

| | | | | |
|----------|---|---------|---------|---------|
| GH 0,3mm | ○ | 15.051* | 15.052* | 15.053* |
| GH 0,3mm | ⬡ | 16.051* | 16.052* | 16.053* |



TI-BASE CASTABLES

| | | | | |
|---------|---|-----------|-----------|-----------|
| 5 Pack. | ○ | 32.001-P5 | 32.001-P5 | 32.001-P5 |
| 5 Pack. | ⬡ | 33.001-P5 | 33.001-P5 | 33.001-P5 |



ABUTMENTS

| | NP | RP | WP |
|--|-----|-----|-----|
| | 3.7 | 4.2 | 5.2 |

| | | | |
|-----|---------|---------|---------|
| 0° | 13.020* | 13.021* | 13.022* |
| 15° | 22.020* | 22.021* | |



SCREW HEX 1,27mm

| | | | |
|---------------------------|---------------|---------------|---------------|
| | 19.013* | 19.014* | 19.014* |
| 10 Pack. | | 19.014-P10* | 19.014-P10* |
| TIN | 19.613* | 19.614* | 19.614* |
| <i>Recommended torque</i> | <i>30 Ncm</i> | <i>30 Ncm</i> | <i>30 Ncm</i> |







PRE-MILLED BLANK

| | | | | |
|--------|------|---------|---------|---------|
| Ø 10mm | Ti | 61.020* | 61.021* | 61.022* |
| Ø 14mm | Ti | 62.020* | 62.021* | 62.022* |
| Ø 14mm | CoCr | 71.020* | 71.021* | 71.022* |



CASTABLE

| | | | | |
|----------|---|--------|------------|--------|
| |  | 28.020 | 28.021 | 28.022 |
| 10 Pack. |  | | 11.021-P10 | |
| |  | 29.020 | 29.021 | 29.022 |
| 10 Pack. |  | | 12.021-P10 | |


Your design, our precision

PRE-MILLED

Mill your design with the precision of the DESS® connections. Our range of blank pre-milled is available for the most popular implant connections in the world.

- 32 compatibilities
- Titanium Grade 5 ELI Ø 10mm 14mm
- Micromelt CoCr Ø 14mm
- Total millable length 20mm
- Minimal gingival transition (0,3mm)





INTERNAL HEX MI


compatible with
Mis[®] Seven

○ non-engaging

⬡ engaging




| | NP | SP | WP | Multi-Unit |
|-------------------------|-----|----------|----------|------------|
| HEALING ABUTMENT | 3.3 | 3.75-4.2 | 5.0-6.0 | 4.8 |
| GH 3,0mm | | 20.017/3 | 20.018/3 | |
| GH 4,0mm | | 20.017/4 | 20.018/4 | |
| GH 5,0mm | | 20.017/5 | 20.018/5 | |



SCAN ABUTMENTS

| | | | | | |
|--|------------|------------|------------|------------|--------|
| | | 50.056 | 50.017 | 50.018 | |
| | | 52.056 | 52.017 | 52.018 | 52.085 |
| | 10 Pack. ○ | 53.100-P10 | 53.100-P10 | 53.100-P10 | |
| | 10 Pack. ⬡ | 53.200-P10 | 53.200-P10 | 53.200-P10 | |



52.xxx includes manual tool DTPEIPEEK.




TRANSFER

| | | | | |
|--|--------|--------|--------|--|
| | 17.056 | 17.017 | 17.018 | |
|--|--------|--------|--------|--|

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE



Retention screw Hex 1,27 mm*

| NP | SP | WP | Multi-Unit |
|----------|----------|----------|--|
| 3.3 | 3.75-4.2 | 5.0-6.0 | 4.8 |
| 14.056/D | 14.095/D | 14.096/D | 14.007/D ¹ 14.085/D ² |


*Other retention screws available, see page 59

¹ Standard Multi-unit

² MIS® Multi-unit



ANALOGUE



10 Pack.

| | | | |
|--------|------------|------------|--|
| 14.056 | 14.095 | 14.096 | 14.007 ¹ 14.085 ² |
| | 14.095-P10 | 14.096-P10 | 14.007-P10 |


¹ Standard Multi-Unit

² MIS® Multi-Unit




TEMPORARY ABUTMENT









| | | |
|---|---------|---------|
| ○ | 24.095* | 24.096* |
| ⬡ | 25.095* | 25.096* |



DESSLoc®



| | | |
|----------|----------|----------|
| GH 1,0mm | 88.017/1 | 88.018/1 |
| GH 2,5mm | 88.017/2 | 88.018/2 |
| GH 3,5mm | 88.017/3 | 88.018/3 |
| GH 4,5mm | 88.017/4 | 88.018/4 |
| GH 5,5mm | 88.017/5 | |



| TI-BASE | | NP | SP | WP | Multi-Unit |
|----------|---|---------|----------|---------|--------------------|
| | | 3.3 | 3.75-4.2 | 5.0-6.0 | 4.8 |
| GH 0,3mm |  | | | 15.096* | 15.085* <i>mis</i> |
| GH 0,8mm |  | 15.056* | 15.095* | | |
| GH 1,5mm |  | 15.256* | 15.295* | 15.296* | |
| GH 3,0mm |  | 15.356* | 15.395* | 15.396* | |
| GH 0,3mm |  | | | 16.096* | |
| GH 0,8mm |  | 16.056* | 16.095* | | |
| GH 1,5mm |  | 16.256* | 16.295* | 16.296* | |
| GH 3,0mm |  | 16.356* | 16.395* | 16.396* | |












TI-BASE CASTABLES

| | | | | | |
|---------|---|-----------|-----------|-----------|-----------|
| 5 Pack. |  | 32.001-P5 | 32.001-P5 | 32.001-P5 | 32.001-P5 |
| 5 Pack. |  | 33.001-P5 | 33.001-P5 | 33.001-P5 | 33.001-P5 |






MULTI-UNIT ABUTMENTS

| | | | | | |
|----------|-----|---|--|----------|----------|
| GH 1,0mm | 0° |  | | 40.019/1 | 40.020/1 |
| GH 2,0mm | 0° |  | | 40.019/2 | 40.020/2 |
| GH 3,0mm | 0° |  | | 40.019/3 | 40.020/3 |
| GH 4,0mm | 0° |  | | 40.019/4 | |
| GH 5,0mm | 0° |  | | 40.019/5 | |
| GH 2,5mm | 17° |  | | 41.719/2 | 41.720/2 |
| GH 3,5mm | 17° |  | | 41.719/3 | 41.720/3 |
| GH 3,5mm | 30° |  | | 43.019/3 | 43.020/3 |
| GH 4,5mm | 30° |  | | 43.019/4 | 43.020/4 |

4.8
MULTI-UNIT PLATFORM





| | NP | SP | WP | Multi-Unit |
|---|------------|-----------------|----------------|------------|
| AURUMBase® | 3.3 | 3.75-4.2 | 5.0-6.0 | 4.8 |
|  | | 36.017 | 36.018 | |
|  | | 37.017 | 37.018 | |

PLASTIC SLEEVES FOR AURUMBase®



| | | | |
|---------|-----|-----------|-----------|
| 5 Pack. | 0° | 33.100-P5 | 33.100-P5 |
| 5 Pack. | 10° | 33.101-P5 | 33.101-P5 |
| 5 Pack. | 20° | 33.102-P5 | 33.102-P5 |



Torx® Screw AURUMBase®

| | | | |
|----------------------------|--|--------|--------|
| <i>(replacement screw)</i> | | 19.417 | 19.417 |
| <i>Recommended torque</i> | | 30 Ncm | 30 Ncm |

Torx® BALL SCREWDRIVER






| | 20mm | 24mm | 30mm | 35mm |
|--|----------|----------|----------|----------|
| | DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |



ABUTMENTS

| | | |
|-----|---------|---------|
| 0° | 13.095* | 13.096* |
| 15° | 22.095* | 22.096* |
| 25° | 23.095* | 23.096* |





| | NP | SP | WP | Multi-Unit |
|---------------------------|---------------|-----------------|----------------|---|
| SCREW HEX 1,27mm | 3.3 | 3.75-4.2 | 5.0-6.0 | 4.8 |
| | 19.056* | 19.081* | 19.081* | 19.110  |
| TIN | 19.656* | 19.681* | 19.681* | |
| <i>Recommended torque</i> | <i>30 Ncm</i> | <i>30 Ncm</i> | <i>30 Ncm</i> | <i>30 Ncm</i> |
| | | | | 19.085*  |
| TIN | | | | 19.685*  |
| <i>Recommended torque</i> | | | | <i>15 Ncm</i> |







| PRE-MILLED BLANK | | | | |
|-------------------------|------|---------|---------|---------|
| Ø 10mm | Ti | 61.056* | 61.095* | 61.096* |
| Ø 14mm | CoCr | | 71.095* | 71.096* |



| CoCr BASE | | | | |
|------------------|---|---------|---------|---------|
| |  | 30.056* | 30.095* | 30.096* |
| |  | 31.056* | 31.095* | 31.096* |




| CASTABLE | | | | |
|-----------------|---|--------|------------|------------|
| |  | 28.056 | 28.095 | 28.096 |
| 10 Pack. |  | | 11.017-P10 | 11.018-P10 |
| |  | 29.056 | 29.095 | 29.096 |
| 10 Pack. |  | | 12.017-P10 | 12.018-P10 |


ELLIPTIBase

FOR NARROW INTERDENTAL SPACES

- Better aesthetic results.
- SelectGrip® surface treatment.
- 22% smaller than a standard Ti-Base.
- 20° angulation.
- Zirconium nitride (ZrN) coating.

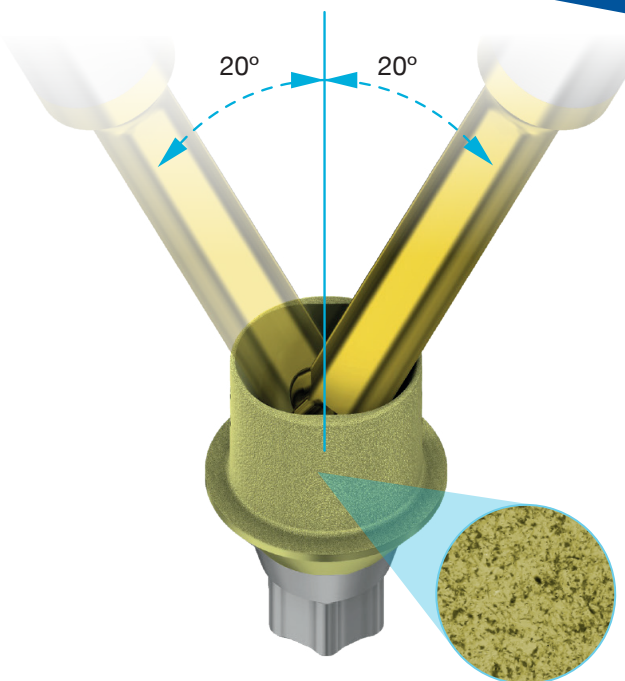

*Microscopic view




Footprint

- ELLIPTIBase®
- Ti-Base


The 22% size reduction achieved in ELLIPTIBase® design allows for more space for restoration.

SelectGrip®: surface treatment that improves retention by up to 500%.



CONIC MC






compatible with
Mis[®] C1 internal


 non-engaging

 engaging



SCAN ABUTMENTS

| | | NP | SP | WP | Multi-Unit |
|---|--|------------|------------|------------|-------------------|
|  | | 52.081 | 52.082 | 52.083 | 52.085 <i>MIS</i> |
|  | 10 Pack.  | 53.100-P10 | 53.100-P10 | 53.100-P10 | |
|  | 10 Pack.  | 53.200-P10 | 53.200-P10 | 53.200-P10 | |



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

| | | NP | SP | WP | Multi-Unit |
|--|--|--------|--------|--------|------------|
| | | 17.081 | 17.082 | 17.083 | |

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE



Platform Colour Coded

Retention screw Hex 1,27 mm*

*Other retention screws available, see page 59

| | | NP | SP | WP | Multi-Unit |
|--|--|----------|----------|----------|-----------------------|
| | | 14.081/D | 14.082/D | 14.083/D | 14.007/D ¹ |
| | | | | | 14.085/D ² |

¹ Standard Multi-Unit ² MIS[®] Multi-Unit



ANALOGUE



Platform Colour Coded

| | | NP | SP | WP | Multi-Unit |
|--|--|--------|--------|--------|---------------------|
| | | 14.081 | 14.082 | 14.083 | 14.007 ¹ |
| | | | | | 14.085 ² |

¹ Standard Multi-Unit ² MIS[®] Multi-Unit



| | | NP | SP | WP | Multi-Unit |
|----------------|----------|----|---------|---------|-------------------|
| TI-BASE | | | | | |
| | | | | | 4.8 |
| | GH 0,3mm | ○ | | | 15.085* <i>ms</i> |
| | GH 1,0mm | ○ | 15.081* | 15.082* | 15.083* |
| | GH 0,3mm | ◊ | | | 16.085* <i>ms</i> |
| | GH 1,0mm | ◊ | 16.081* | 16.082* | 16.083* |




| TI-BASE CASTABLES | | | | | | |
|--------------------------|---------|---|-----------|-----------|-----------|-----------|
| | 5 Pack. | ○ | 32.001-P5 | 32.001-P5 | 32.001-P5 | 32.007-P5 |
| | 5 Pack. | ◊ | 33.001-P5 | 33.001-P5 | 33.001-P5 | |



| SCREW HEX 1,27mm | | | | | | |
|-------------------------|---------------------------|--|---------------|---------------|---------------|-------------------|
| | | | 19.056* | 19.081* | 19.081* | |
| | | | | | | 19.085* <i>ms</i> |
| | TIN | | 19.656* | 19.681* | 19.681* | |
| | TIN | | | | | 19.685* <i>ms</i> |
| | <i>Recommended torque</i> | | <i>30 Ncm</i> | <i>30 Ncm</i> | <i>30 Ncm</i> | <i>25 Ncm</i> |



| PRE-MILLED BLANK | | | | | | |
|-------------------------|----|--|---------|--------|---------|--|
| Ø 10mm | Ti | | 61.081* | 61.082 | 61.083* | |



CONIC MV

compatible with
Mis® V3

○ non-engaging

◊ engaging



SCAN ABUTMENTS



10 Pack. ○

10 Pack. ◊

NP

SP

Multi-Unit

4.8

52.084

52.082

52.085 *MIS*

53.100-P10 53.100-P10

53.200-P10 53.200-P10



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

17.084

17.082

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE

Platform Colour Coded

Retention screw Hex 1,27 mm*

14.084/D

14.082/D

14.007/D ¹

14.085/D ²

*Other retention screws available, see page 59

¹ Standard Multi-Unit

² MIS® Multi-Unit



ANALOGUE

Platform Colour Coded

14.084

14.082

14.007 ¹

14.085 ²

¹ Standard Multi-Unit

² MIS® Multi-Unit



| | | NP | SP | Multi-Unit |
|----------------|---|---------|---------|-------------------|
| TI-BASE | | | | 4.8 |
| GH 0,3mm | ○ | | | 15.085* <i>ms</i> |
| GH 1,0mm | ○ | 15.084* | 15.082* | |
| GH 1,0mm | ⬠ | 16.084* | 16.082* | |




| | | NP | SP | Multi-Unit |
|--------------------------|---|-----------|-----------|------------|
| TI-BASE CASTABLES | | | | |
| 5 Pack. | ○ | 32.001-P5 | 32.001-P5 | 32.007-P5 |
| 5 Pack. | ⬠ | 33.001-P5 | 33.001-P5 | |



| | | NP | SP | Multi-Unit |
|---------------------------|--|---------|---------|------------|
| SCREW HEX 1,27mm | | | | |
| | | 19.056* | 19.081* | |
| | | | | 19.085* |
| TIN | | 19.656* | 19.681* | |
| TIN | | | | 19.685* |
| <i>Recommended torque</i> | | 30 Ncm | 30 Ncm | 25 Ncm |



| | | NP | SP | Multi-Unit |
|-------------------------|----|---------|--------|------------|
| PRE-MILLED BLANK | | | | |
| Ø 10mm | Ti | 61.084* | 61.082 | |




CONIC ANYR

compatible with
Megagen AnyRidge®

○ non-engaging

⬡ engaging



SCAN ABUTMENTS



50.057



52.057




10 Pack. ○

53.100-P10



10 Pack. ⬡

53.200-P10



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

17.057

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE




Platform Colour Coded

Retention screw Hex 1,27 mm*

14.057/D

*Other retention screws available, see page 59



ANALOGUE



Platform Colour Coded

14.057




TI-BASE

| | | |
|----------|---|--------|
| GH 2,0mm | ○ | 15.057 |
| GH 3,0mm | ○ | 15.357 |
| GH 2,0mm | ⬡ | 16.057 |
| GH 3,0mm | ⬡ | 16.357 |



TI-BASE CASTABLES

| | | |
|---------|---|-----------|
| 5 Pack. | ○ | 32.001-P5 |
| 5 Pack. | ⬡ | 33.001-P5 |



AURUMBase®

| | |
|---|--------|
| ○ | 36.057 |
| ⬡ | 37.057 |

PLASTIC SLEEVES FOR AURUMBase®



| | | |
|---------|-----|-----------|
| 5 Pack. | 0° | 33.100-P5 |
| 5 Pack. | 10° | 33.101-P5 |
| 5 Pack. | 20° | 33.102-P5 |



Torx® Screw AURUMBase®

| | |
|---------------------|--------|
| (replacement screw) | 19.460 |
| Recommended torque | 35 Ncm |

Torx® BALL SCREWDRIVER



| | | | | |
|--|----------|----------|----------|----------|
| | 20mm | 24mm | 30mm | 35mm |
| | DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |



SCREW HEX 1,20mm

| | | |
|---------------------------|-----|---------|
| | | 19.057 |
| | TIN | 19.657* |
| <i>Recommended torque</i> | | 35 Ncm |



PRE-MILLED BLANK

| | | |
|--------|------|--------|
| Ø 10mm | Ti | 61.057 |
| Ø 14mm | CoCr | 71.057 |

Zirconium Nitride



Less biofilm genesis on the surface

With less biofilm and plaque, there will be less quantity and quality of bacteria that can cause soft tissue inflammation.



Increased adhesion of fibroblasts

A higher adhesion of fibroblasts locks the path between the surface and soft tissue preventing bacteria to enter the gingival margin.



Increased collagen stability

ZrN creates less of an inflammatory burden and collagen degradation in the gingival tissue as evidenced by less aMMP8 biomarker in the gingival fluid.



Six times harder than Titanium Oxide

Will not scratch as easily when cleaned using cures, ultrasound or other instruments.



Surface is more resistant to corrosion

Dental plaque produces acid that will corrode the surface and increase roughness. ZrN is harder and has a smaller friction coefficient, which makes it more resistant to corrosion.




ZrN has a warm gold hue

A warmer goldish hue has aesthetic advantages compared to the titanium grey.

ZrN

- Less inflammation.
- Less plaque adhesion.
- Higher corrosion resistance.
- Easier to clean.
- 6x harder than Titanium Oxide.






CONIC AXIO

compatible with
Anthogyr AXIOM®

○ non-engaging

△ engaging



SCAN ABUTMENTS



52.077




10 Pack. ○

53.100-P10

10 Pack. △

53.200-P10



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

17.077

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE

■ Platform Colour Coded

Retention screw Hex 1,27 mm*

14.077/D


*Other retention screws available, see page 59



ANALOGUE

■ Platform Colour Coded

14.077

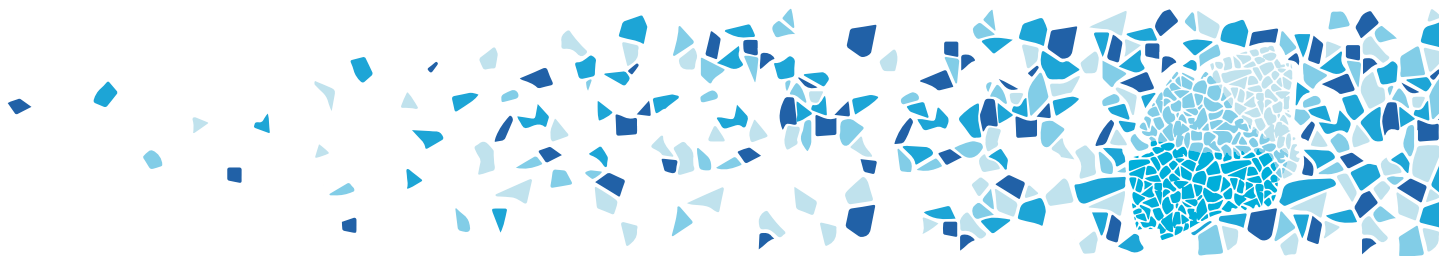

TI-BASE

| | | |
|----------|---|---------|
| GH 2,9mm | ○ | 15.077* |
| GH 2,9mm | △ | 16.077* |



TI-BASE CASTABLES

| | | |
|---------|---|-----------|
| 5 Pack. | ○ | 32.001-P5 |
| 5 Pack. | △ | 33.001-P5 |



SCREW HEX 1,18mm

| | | |
|---------------------------|--|---------|
| | | 19.077* |
| TIN | | 19.677* |
| <i>Recommended torque</i> | | 25 Ncm |
| On Abutment® | | 19.062* |
| TIN | | 19.662* |
| <i>Recommended torque</i> | | 15 Ncm |



PRE-MILLED BLANK

| | | |
|--------|----|---------|
| Ø 10mm | Ti | 61.077* |
|--------|----|---------|




CONIC IC

compatible with
Medentis ICX®

○ non-engaging

⬡ engaging



SCAN ABUTMENTS



50.080



52.080




10 Pack. ○

53.100-P10

10 Pack. ⬡

53.200-P10



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

17.080

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE



Platform Colour Coded

Retention screw Hex 1,27 mm*

14.080/D

*Other retention screws available, see page 59



ANALOGUE



Platform Colour Coded

14.080



TI-BASE



15.080*



16.080*



TI-BASE CASTABLES

5 Pack.




32.001-P5

5 Pack.



33.001-P5



AURUMBase®

GH 2,2mm



36.080*

GH 0,9mm



36.180*

GH 2,2mm



37.080*

GH 0,9mm



37.180*

PLASTIC SLEEVES FOR AURUMBase®

5 Pack.

0°

33.100-P5

5 Pack.

10°

33.101-P5

5 Pack.

20°

33.102-P5



Torx® Screw AURUMBase®

2,2mm

19.444

(replacement screw)

0,9mm

19.443

Recommended torque

30 Ncm

Torx® BALL SCREWDRIVER

20mm

24mm

30mm

35mm

DT20TB06

DT24TB06

DT30TB06

DT35TB06





SCREW HEX 1,40mm

| | | |
|---------------------------|-----|---------|
| | | 19.080* |
| | TIN | 19.680* |
| <i>Recommended torque</i> | | 30 Ncm |




PRE-MILLED BLANK

| | | |
|--------|------|---------|
| Ø 10mm | Ti | 61.080* |
| Ø 14mm | Ti | 62.080* |
| Ø 14mm | CoCr | 71.080* |

The importance of a precise image

Our revolutionary intraoral scan abutment, co-designed with Exocad®, has been carefully created to produce the most precise image. Intraoral scan abutment, manufactured in titanium, allows for Rx control and includes ZrN coating to reduce glitter effect.

1. NO SCREW HOLE
(No distortion on scan)
2. ORIENTATION ON HIGHER POSITION
(Maximum visibility)
3. MANUFACTURED IN TITANIUM
(Extremely durable)
4. INCLUDES MANUAL TOOL DTPEIPEEK.

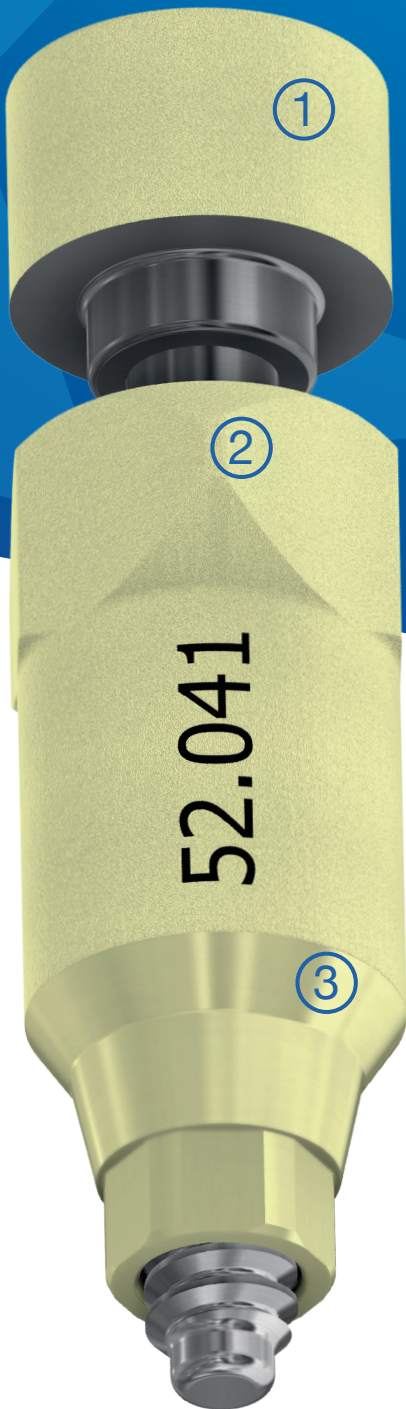



CONIC INK

compatible with
GlobalD IN-KONE®

○ non-engaging

⬡ engaging



SCAN ABUTMENTS



52.086




10 Pack. ○

53.100-P10

10 Pack. ⬡

53.200-P10



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

17.086

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE



Platform Colour Coded

Retention screw Hex 1,27 mm*

14.086/D

*Other retention screws available, see page 59



ANALOGUE



Platform Colour Coded

14.086



TI-BASE

| | | |
|--|---|---------|
| | ○ | 15.086* |
| | ⬡ | 16.086* |



TI-BASE CASTABLES

| | | |
|---------|---|-----------|
| 5 Pack. | ○ | 32.001-P5 |
| 5 Pack. | ⬡ | 33.001-P5 |



SCREW HEX 1,22mm

| | | |
|-------------|-----------|---------|
| | | 19.086* |
| | TIN | 19.686* |
| On Abutment | 0° | 19.035* |
| | 17° / 30° | 19.036* |
| | TIN | 19.635* |
| | TIN | 19.636* |

Recommended torque 15 Ncm




CONIC DENT

○ non-engaging

⬡ engaging

compatible with

Dentium Superline™ & Implantium®



SCAN ABUTMENTS

RP

3.6

3.8

4.0

4.5

5.0



50.090



52.090



10 Pack. ○

53.100-P10



10 Pack. ⬡

53.200-P10



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

17.090

Transfers include two screws (for open and closed tray).




DIGITAL ANALOGUE

■ Platform Colour Coded

Retention screw Hex 1,27 mm*

14.090/D

*Other retention screws available, see page 59

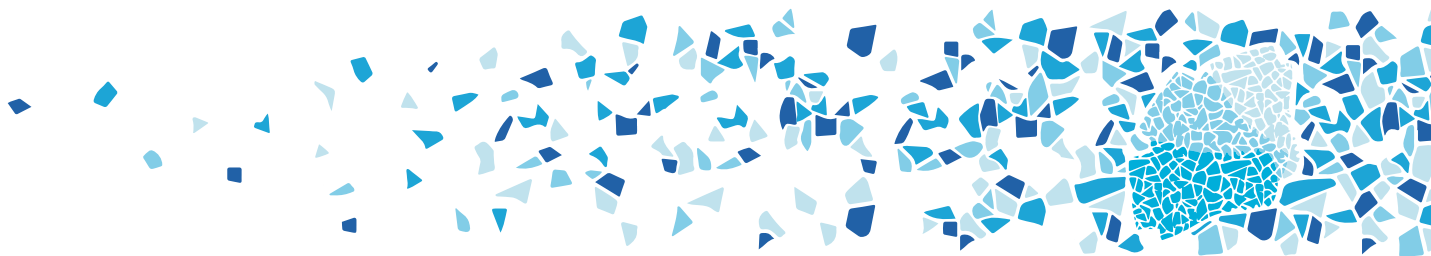

Platform Colour Coded

ANALOGUE

| RP | | | | |
|--------|-----|-----|-----|-----|
| 3.6 | 3.8 | 4.0 | 4.5 | 5.0 |
| 14.090 | | | | |

TI-BASE



| | | |
|----------|---|---------|
| GH 0,9mm | ○ | 15.090* |
| GH 1,5mm | ○ | 15.190* |
| GH 3,0mm | ○ | 15.390* |
| GH 0,9mm | ⬡ | 16.090* |
| GH 1,5mm | ⬡ | 16.190* |
| GH 3,0mm | ⬡ | 16.390* |



TI-BASE CASTABLES


| | | |
|---------|---|-----------|
| 5 Pack. | ○ | 32.001-P5 |
| 5 Pack. | ⬡ | 33.001-P5 |



MULTI-UNIT ABUTMENTS

| RP | | | | |
|-----|-----|-----|-----|-----|
| 3.6 | 3.8 | 4.0 | 4.5 | 5.0 |

| | | | | | |
|----------|-----|---|--|--|-----------|
| GH 1,5mm | 0° | ○ | | | 40.090/1 |
| GH 2,5mm | 0° | ○ | | | 40.090/2 |
| GH 3,5mm | 0° | ○ | | | 40.090/3 |
| GH 2,5mm | 17° | ⬡ | | | 41.790/2* |
| GH 3,5mm | 17° | ⬡ | | | 41.790/3* |
| GH 2,5mm | 30° | ⬡ | | | 43.090/2* |
| GH 3,5mm | 17° | ⬡ | | | 43.090/3* |



AURUMBase®

| | | |
|--|---|---------|
| | ○ | 36.090* |
| | ⬡ | 37.090* |

PLASTIC SLEEVES FOR AURUMBase®



| | | |
|---------|-----|-----------|
| 5 Pack. | 0° | 33.100-P5 |
| 5 Pack. | 10° | 33.101-P5 |
| 5 Pack. | 20° | 33.102-P5 |



Torx® Screw AURUMBase®

| | |
|---------------------|--------|
| (replacement screw) | 19.405 |
| Recommended torque | 30 Ncm |

Torx® BALL SCREWDRIVER

| 20mm | 24mm | 30mm | 35mm |
|----------|----------|----------|----------|
| DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |





SCREW HEX 1,28mm

| RP | |
|-----|-----------------|
| 3.6 | 3.8 4.0 4.5 5.0 |

| | | |
|---------------------------|--|---------|
| | | 19.090* |
| TIN | | 19.690* |
| <i>Recommended torque</i> | | 30 Ncm |
| On Abutment® | | 19.066* |
| TIN | | 19.666* |
| <i>Recommended torque</i> | | 10 Ncm |



PRE-MILLED BLANK

| | | |
|--------|------|---------|
| Ø 10mm | Ti | 61.090* |
| Ø 14mm | Ti | 62.090* |
| Ø 14mm | CoCr | 71.090* |




CoCr BASE

| | |
|---|---------|
| ○ | 30.090* |
| ◻ | 31.090* |



CASTABLE

| | |
|---|--------|
| ○ | 28.090 |
| ◻ | 29.090 |



INTERNAL SEM



compatible with
Bego Semados®


-  non-engaging
-  engaging



SCAN ABUTMENTS



| | | 3.25/3.75 | 4.1 | 4.5 | 5.5 |
|----------|---|------------|------------|------------|------------|
| | | 52.091 | 52.092 | 52.093 | 52.094 |
| 10 Pack. |  | 53.100-P10 | 53.100-P10 | 53.100-P10 | 53.100-P10 |
| 10 Pack. |  | 53.200-P10 | 53.200-P10 | 53.200-P10 | 53.200-P10 |



52.xxx includes manual tool DTPEIPEEK.




TRANSFER

| | | 17.091 | 17.092 | 17.093 | 17.094 |
|--|--|--------|--------|--------|--------|
| | | | | | |

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE




Platform Colour Coded


Retention screw Hex 1,27 mm*

*Other retention screws available, see page 59

| | | 14.091/D | 14.092/D | 14.093/D | 14.094/D |
|--|--|----------|----------|----------|----------|
| | | | | | |



ANALOGUE



Platform Colour Coded

| | | 14.091 | 14.092 | 14.093 | 14.094 |
|--|--|--------|--------|--------|--------|
| | | | | | |



TI-BASE



| | | 3.25/3.75 | 4.1 | 4.5 | 5.5 |
|----------|---|-----------|---------|---------|---------|
| GH 0,7mm | ○ | | | 15.091* | 15.094* |
| GH 0,9mm | ○ | | 15.091* | | |
| GH 1,1mm | ○ | 15.091* | | | |
| GH 0,7mm | ⬡ | | | 16.091* | 16.094* |
| GH 0,9mm | ⬡ | | 16.091* | | |
| GH 1,1mm | ⬡ | 16.091* | | | |



TI-BASE CASTABLES

| | | 3.25/3.75 | 4.1 | 4.5 | 5.5 |
|---------|---|-----------|-----------|-----------|-----------|
| 5 Pack. | ○ | 32.001-P5 | 32.001-P5 | 32.001-P5 | 32.001-P5 |
| 5 Pack. | ⬡ | 33.001-P5 | 33.001-P5 | 33.001-P5 | 33.001-P5 |



SCREW HEX 1,27mm

| | | 3.25/3.75 | 4.1 | 4.5 | 5.5 |
|--|-----|-----------|---------|---------|---------|
| | | 19.091* | 19.091* | 19.091* | 19.091* |
| | TIN | 19.691* | 19.691* | 19.691* | 19.691* |

Recommended torque 30 Ncm 30 Ncm 30 Ncm 30 Ncm



PRE-MILLED BLANK

| | | 3.25/3.75 | 4.1 | 4.5 | 5.5 |
|--------|------|-----------|---------|---------|---------|
| Ø 10mm | Ti | 61.091* | 61.092* | 61.093* | 61.094* |
| Ø 14mm | Ti | | | | 62.094* |
| Ø 14mm | CoCr | | | | 71.094* |



CONIC BIO

compatible with
Biotech KONTACT®

○ non-engaging

⬠ engaging



SCAN ABUTMENTS

NP

RP



52.078




10 Pack. ○

53.100-P10

10 Pack. ⬠

53.200-P10



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

17.078

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE



Platform Colour Coded

Retention screw Hex 1,27 mm*

14.078/D

*Other retention screws available, see page 59



ANALOGUE



Platform Colour Coded

14.078



TI-BASE

NP

RP



15.078*



16.078*



TI-BASE CASTABLES

5 Pack.



32.001-P5

5 Pack.



33.001-P5



SCREW HEX 1,22mm

19.078*

19.063*

19.064*

TIN

19.678*

19.663*

19.664*

Recommended torque

20 Ncm

20 Ncm

20 Ncm



PRE-MILLED BLANK

Ø 10mm

Ti

61.078*

Ø 14mm

CoCr

71.078*



INTERNAL BT

compatible with
BTI®

○ non-engaging

◊ engaging



SCAN ABUTMENTS

4.1 MULTI IM®



52.079




10 Pack. ○

53.100-P10

10 Pack. ◊

53.200-P10



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

17.079

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE

■ Platform Colour Coded

Retention screw Hex 1,27 mm*

14.079/D


*Other retention screws available, see page 59



ANALOGUE

■ Platform Colour Coded

14.079

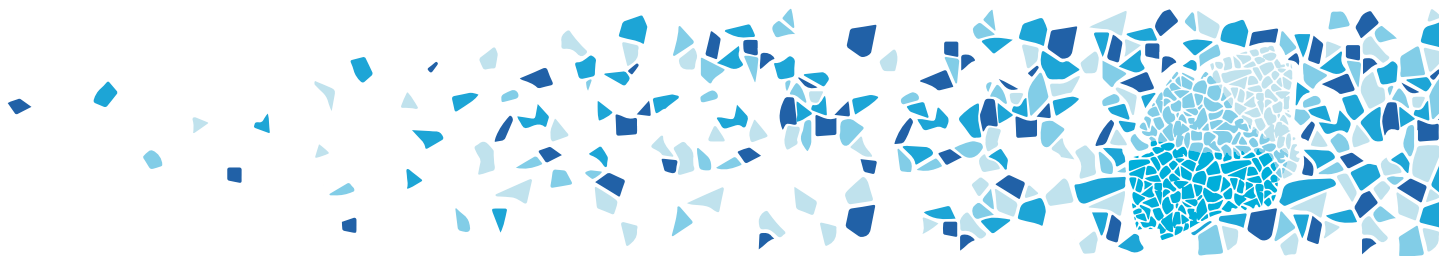

TI-BASE

4.1 MULTI IM®



15.079*



16.079*



TI-BASE CASTABLES

5 Pack.



32.001-P5

5 Pack.



33.001-P5



SCREW HEX 1,22mm

TIN

19.079*

19.065


19.679*

19.665*

Recommended torque

35 Ncm

10 Ncm



EXTERNAL HEX PH

compatible with
PHIBO® TSH®

○ non-engaging

⬡ engaging



SCAN ABUTMENTS



10 Pack. ○

10 Pack. ⬡

NP

SP

WP

S2

S3-S4

S5

52.030

52.031

52.032

53.100-P10

53.100-P10

53.100-P10

53.200-P10

53.200-P10

53.200-P10



52.xxx includes manual tool DTPEIPEEK.



TRANSFER

17.030

17.031

17.032

Transfers include two screws (for open and closed tray).



DIGITAL ANALOGUE



Platform Colour Coded

Retention screw Hex 1,27 mm*

*Other retention screws available, see page 59

14.030/D

14.031/D

14.032/D



ANALOGUE



Platform Colour Coded

14.030

14.031

14.032



| AURUMBase® | | NP | SP | WP |
|------------|---|-----------|-----------|-----------|
| | | S2 | S3-S4 | S5 |
| | ○ | 36.030* | 36.031* | 36.032* |
| | ○ | 36.030/2* | 36.031/2* | 36.032/2* |
| | ○ | 36.030/3* | 36.031/3* | 36.032/3* |
| | ⬡ | 37.030* | 37.031* | 37.032* |
| | ⬡ | 37.030/2* | 37.031/2* | 37.032/2* |
| | ⬡ | 37.030/3* | 37.031/3* | 37.032/3* |

PLASTIC SLEEVES FOR AURUMBase®



| | | | | |
|---------|-----|-----------|-----------|-----------|
| 5 Pack. | 0° | 33.100-P5 | 33.100-P5 | 33.100-P5 |
| 5 Pack. | 10° | 33.101-P5 | 33.101-P5 | 33.101-P5 |
| 5 Pack. | 20° | 33.102-P5 | 33.102-P5 | 33.102-P5 |



Torx® Screw AURUMBase®

| | | | |
|---------------------|---------|--------|--------|
| (replacement screw) | 19.403* | 19.402 | 19.402 |
| Recommended torque | 35 Ncm | 35 Ncm | 35 Ncm |

Torx® BALL SCREWDRIVER



| | 20mm | 24mm | 30mm | 35mm |
|--|----------|----------|----------|----------|
| | DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 |



MULTI-UNIT CONNECTION

non-engaging

HEALING ABUTMENT


RP
MULTI-UNIT
4.8

WP
6




| | | | |
|-----------------------|------------|------------|--------|
| <input type="radio"/> | Uni Grip | 20.100 | 20.054 |
| <input type="radio"/> | Hex 1,20mm | 20.100H120 | |
| <input type="radio"/> | Hex 1,22mm | 20.100H122 | |
| <input type="radio"/> | Hex 1,27mm | 20.100H127 | |
| <input type="radio"/> | Torx® Ball | 20.100TB* | |

SCAN ABUTMENTS



| | | | | |
|--|---------|-----------------------|-----------|-----------|
| | | | 50.007 | 50.047 |
| | | | 52.007 | 52.047 |
| | 5 Pack. | <input type="radio"/> | 53.107-P5 | 53.154-P5 |
| | 5 Pack. | <input type="radio"/> | 53.107-P5 | 53.155-P5 |



52.xxx includes manual tool DTPEIPEEK.

TRANSFER



| | | | | |
|-------|---------|--|-----------|--------|
| | | | 17.007 | 17.050 |
| 5,0mm | | | 17.507 | |
| 5,0mm | 4 Pack. | | 17.507-P4 | |
| 8,0mm | | | 17.807 | |
| 8,0mm | 4 Pack. | | 17.807-P4 | |



DIGITAL ANALOGUE

RP **WP**
MULTI-UNIT
4.8 **6**

Platform Colour Coded

Retention screw Hex 1,27 mm*

14.007/D

14.047/D

*Other retention screws available, see page 59



ANALOGUE

Platform Colour Coded

10 Pack.

14.007

14.047

14.007-P10

14.047-P10

TEMPORARY ABUTMENT



| | | | |
|--|------------|----------------------|--------|
| | Uni Grip | 24.007 | 24.030 |
| | Hex 1,20mm | 24.007H120 19.055 | |
| | Hex 1,22mm | 24.007H122 19.065 | |
| | Hex 1,27mm | 24.007H127 19.110 | |
| | Torx® Ball | 24.007TB* 19.306 | |

TEMPORARY ABUTMENT PEEK



| | | | |
|--|------------|------------------|--------|
| | Uni Grip | 25.707 | 25.754 |
| | Hex 1,20mm | 24.757 19.055 | |
| | Hex 1,22mm | 24.767 19.065 | |
| | Hex 1,27mm | 24.777 19.110 | |
| | Torx® Ball | 24.787 19.306 | |

©Multi-Unit Connection

RP **WP**
MULTI-UNIT
4.8 **6**



DESSLoc®

88.007

TI-BASE



| | | | | | |
|-------|----------|---|------------|----------------------|--------|
| 6,0mm | | ○ | Uni Grip | 15.007 | 15.054 |
| 6,0mm | 10 Pack. | ○ | Uni Grip | 15.007-P10 | |
| 6,0mm | | ○ | Hex 1,20mm | 15.007H120 19.055 | |
| 6,0mm | | ○ | Hex 1,22mm | 15.007H122 19.065 | |
| 6,0mm | | ○ | Hex 1,27mm | 15.007H127 19.110 | |
| 6,0mm | | ○ | Torx® Ball | 15.007TB* 19.306 | |
| 8,0mm | | ○ | Uni Grip | 15.007/8 | |



TI-BASE CASTABLES

| | | | |
|---------|---|-------------|-----------|
| 5 Pack. | ○ | 32.007-P5 | 32.054-P5 |
| 5 Pack. | ○ | 32.007/8-P5 | |



AURUMBase®

| | | | |
|----------|---|------------|--------|
| | ○ | 36.007 | 36.054 |
| 10 Pack. | ○ | 36.007-P10 | |

PLASTIC SLEEVES FOR AURUMBase®

| | | | | |
|--|---------|-----|-----------|-----------|
| | 5 Pack. | 0° | 33.700-P5 | 33.700-P5 |
| | 5 Pack. | 10° | 33.701-P5 | 33.701-P5 |
| | 5 Pack. | 20° | 33.702-P5 | 33.702-P5 |

Torx® Screw AURUMBase®



| | | |
|---------------------|--------|---------|
| (replacement screw) | 19.306 | 19.331* |
| Recommended torque | 15 Ncm | 15 Ncm |

Torx® BALL SCREWDRIVER

20mm 24mm 30mm 35mm

DT20TB06 DT24TB06 DT30TB06 DT35TB06



SCREW UG

RP
MULTI-UNIT
4.8

WP
6

| | | | |
|----------|--|------------|------------|
| | | 19.006 | 19.031 |
| 10 Pack. | | 19.006-P10 | 19.031-P10 |
| DLC | | 19.206 | 19.231 |
| TIN | | 19.606* | 19.631* |



| | | | |
|--|------------|--------|--|
| | Hex 1,20mm | 19.055 | |
| | Hex 1,22mm | 19.065 | |
| | Hex 1,27mm | 19.110 | |

Recommended torque 15 Ncm 15 Ncm

CoCr BASE




| | | | | |
|-------------------------------|--|--|-------------|--------|
| 6,0mm | | | 30.007 | 30.054 |
| 6,0mm | | | 30.007H120* | 19.055 |
| 6,0mm | | | 30.007H122* | 19.065 |
| 6,0mm | | | 30.007H127* | 19.110 |
| 6,0mm | | | 30.007TB* | 19.306 |
| For welding techniques | | | 30.107* | |

CASTABLE



| | | | | |
|----------|--|--|------------|------------|
| | | | 28.007 | 28.054 |
| 10 Pack. | | | 11.007-P10 | 11.054-P10 |



SCAN ABUTMENTS

10 Pack.

53.153-P10



TRANSFER

17.054




DIGITAL ANALOGUE

Retention screw Hex 1,27 mm*

*Other retention screws available, see page 59

14.054/D



ANALOGUE

10 Pack.

14.054

14.054-P10



BAR ATTACHMENT

88.100

RETENTION KITS



0° - 20° x1
0° - 20° x2

DLRK-P1
DLRK-P2



0° - 40° x1
0° - 40° x2

DLER-P1
DLER-P2

MALES



0° - 20° x4

1.5 lbs / 680g

DLN2-P4



0° - 20° x4

3.0 lbs / 1360g

DLN3-P4



0° - 20° x4

5.0 lbs / 2270g

DLN4-P4



0° - 40° x4

1.5 lbs / 450g

DLN1-P4



0° - 40° x4

2.0 lbs / 910g

DLN6-P4



0° - 40° x4

4.0 lbs / 1810g

DLN7-P4

SPECIAL TOOLS



Direct to torque wrench Nobel Biocare™

DTACTLOC



Direct to torque wrench Straumann®

DTSTRLOC



DESSLoc® tool for square torque wrench

DTLOC



Adaptor from Straumann® torque wrench to square connection

DTSTSQ




Nobel Biocare™ Adapter from 8mm to square connection


DTNBSQ

DESSLoc[®] retention elements removal and insertion tool

EXTRACTION

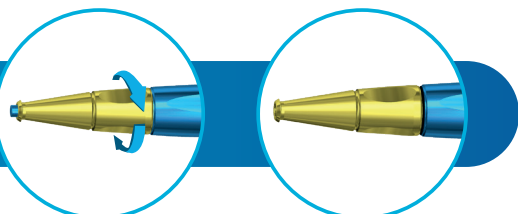

1. Place the tool in the following position, making two complete turns on the gold side.

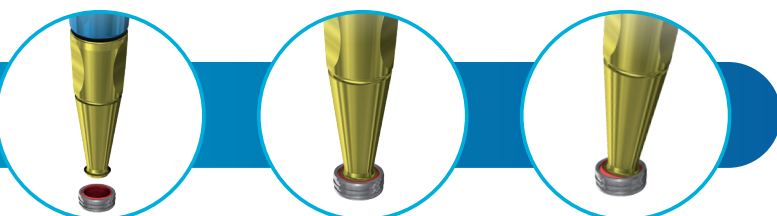

2. Use the tool to remove the old retainer. Press with it until you hear a “click”, finish with a slight lever movement.

3. Screw in the tool to eject the retainer.

RETENTION INSERTION



4.

5.

6.

4. Completely remove the gold part of the tool.


5. Place the new retainer on the end.

6. Press on the cup until you hear a “click”.

DESSLoc[®] INSERTION



1. Use the back of the PHLOC tool to facilitate placement on the models. Fit the tool with the upper part of the DESSLoc[®]

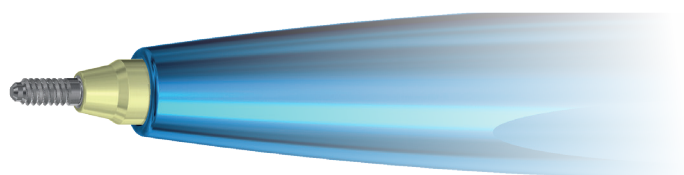



PURE SWITCH^{by} DESS[®] “simple switch, perfect connection”

All DESS[®] products are based on the “Pure Switch” philosophy, a concept which guarantees the interchangeability of abutments without having to switch tools or protocols.

This philosophy ensures that all DESS[®] abutments are interchangeable with any abutment of any implant brand.

- Guaranteed quality.



- Lifetime warranty¹.

- 100% compatibility.

- CAD/CAM libraries available.

- More than 30 connections from a single supplier.

¹To find out more about DESS lifetime warranty download it on our website.

HOLDERS



HLDSTD

For standard
98mm disc machines

Most industrial milling machine
with a 98mm disc holder:

Arum
Dmg
Datron
Haas
Robodril



HLDIMES

For Imes-Icore® machines

Coritec 150i pro
Coritec 245i touch
Coritec 250i touch
Coritec 350i / Coritec 250i Loader
Coritec 450i
Coritec 550i
Coritec 650i / Coritec 650i Loader



HLDVHF

For VHF®

VHF® S1
VHF® S2
VHF® K5
VHF® S5



HLDVHFR5

For VHF®

VHF® R5



HLDYENA

For Yenadent®

D6
D15
D43N



HLDVHFN4

For VHF®


VHF® N4



HLDVHFZ4

For VHF®

VHF® Z4



HLD3R


For machines with
support / changer 3R

D14P

AURUM MILLING TOOL



| | ØA | ØB | ØC | L1 | L2 | L3 | R |
|----------|----|-----|------|----|----|-----|-----|
| MT3D16L5 | 3 | 1,6 | 0,95 | 5 | 51 | 0,5 | 0,1 |
| MT4D16L5 | 4 | 1,6 | 0,95 | 5 | 51 | 0,5 | 0,1 |
| MT6D16L5 | 6 | 1,6 | 0,95 | 5 | 51 | 0,5 | 0,1 |

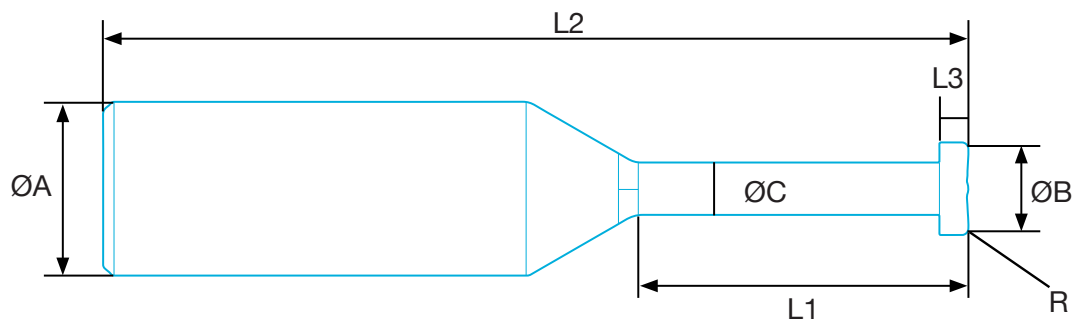

BLOCKS




| | | | |
|------|--------|--------|--------|
| Ti | □ 15mm | L 20mm | 63.020 |
| Ti | □ 15mm | L 40mm | 63.040 |
| CoCr | □ 15mm | L 20mm | 73.020 |
| CoCr | □ 15mm | L 40mm | 73.040 |

TOOLS

SCREWDRIVERS TIPS

| HEX | 18mm | 20mm | 24mm | 30mm | 35mm | compatible with |
|--------|-----------|-----------|-----------|-----------|-----------|---|
| 0,90mm | | DTC20H090 | DTC24H090 | | | Neodent® CM |
| 1,00mm | | DTC20H100 | DTC24H100 | | DTC35H100 | Dentsply Ankylos® C/X |
| 1,20mm | DTC18H120 | DTC20H120 | DTC24H120 | DTC30H120 | DTC35H120 | 3i Osseotite®, Neodent® CM & GM, 3iCertain®, Megagen AnyRidge® |
| 1,22mm | | DTC20H122 | DTC24H122 | | DTC35H122 | Dentsply Friadent Xive®, Osstem® TS, GlobalD®, BT1®, Biotech Kontakt® |
| 1,25mm | | DTC20H125 | DTC24H125 | | | |
| 1,27mm | | DTC20H127 | DTC24H127 | DTC30H127 | DTC35H127 | Astra tech™, OsseosSpeed™, Zimmer Screw-Vent® & Mis® Seven/C1 & V3, BioHorizons®, AstraTech Implants System EV™, Camlog®, Bego Semados® |
| 1,30mm | | DTC20H130 | DTC24H130 | | | |
| 1,50mm | | DTC20H150 | DTC24H150 | | | |
| 1,70mm | | DTC20H170 | DTC24H170 | | | |
| 1,75mm | | DTC20H175 | DTC24H175 | | | Astra tech™ EV, Uniabutment® |




Torx® 06



| | | | | |
|----------|----------|----------|----------|---|
| DT20TC06 | DT24TC06 | DT30TC06 | DT35TC06 | Straumann® Soft Tissue Level & synOcta® Straumann® Bone Level |
|----------|----------|----------|----------|---|


Torx® ball



| | | | | |
|----------|----------|----------|----------|--------------------------|
| DT20TB06 | DT24TB06 | DT30TB06 | DT35TB06 | ANGLEBase®, ELLIPTIBase® |
|----------|----------|----------|----------|--------------------------|




UG **18mm** **20mm** **24mm** **30mm** **35mm** **compatible with**



DT20U DT24U DT30U DT35U Nobel Brånemark®, NobelReplace® Select™, NobelActive™ & NobelReplace® CC, Multi-unit®

NEO


Grand Morse® Neodent®



DT24NG DT30NG DT35NG

Squared

1,30mm DT20S130 DT24S130



SCREWDRIVER HANDLES

Premium laboratory handle



PHLABGOLD



PHLABBLACK

DESSLoc® Removal & Insertion Tool



PHLOC

TI-BASE EXTRACTING TOOL



For Conelog® NP/RP

DCCON



For Conelog® WP

DCCON50



For ZIMMER SCREW-VENT®

DCZIM



For Medentis ICX®

DCICX

TORQUE WRENCH TOOL



Type Straumann 7mm

DTSTTW



Type Nobel 8mm


















DTNBTW

TRAY MULTI-USE



BOX1

SPECIAL TOOLS

| | | |
|---|--|--------------|
|  | Multi-unit® RP | DTMURP |
|  | Multi-unit® WP | DTMUWP |
|  | UniAbutment® (Astra Tech osseospeed™) | DTUNI |
|  | Octagon | DTSYN |
|  | Torque wrench adaptor | TWADAP |
|  | Herramienta DESSLoc® para conexión cuadrada | DTLOC |
|  | Adaptor from 7mm to Straumann® torque wrench to square connection | DTSTSQ |
|  | Straumann® adapter from 8mm to square connection | DTSTWH |
|  | Direct to torque wrench Nobel Biocare™ 8mm | DTACTLOC |
|  | Direct to torque wrench Straumann® 7mm | DTSTRLOC |
|  | Straumann® torque wrench | DTSTCA |
|  | Screwdriver tips adaptor from Nobel Biocare™ torque wrench | DTNBSQ |
|  | Screwdriver tips adaptor from Nobel Biocare™ torque wrench | DTNBWH |
|  | Nobel Biocare™ contra-angles adapter | DTNBCA |
|  | Handpiece adaptor for Square connection | DTANGSQ |
|  | Manual driver for Intraoral Scan abutment | DTPEI |
|  | Manual tool for Intraoral Scan abutment | DTPEIPEEK-P2 |



CLINICAL SCREWS RECOMMENDED TORQUE

**NOBELACTIVE® &
NOBELREPLACE® CC**
ACTIVE HEX



| PLATFORM SIZE | DESS REF. N° | DESS RECOMMENDED TORQUE (Ncm) | ORIGINAL EQUIVALENT REF. N° |
|-------------------------------|--------------|-------------------------------|-----------------------------|
| 3.0 | 19.068 | 15 | Nobel Biocare® 36805 |
| 3.0 | 19.268* | 15 | Nobel Biocare® 37890 |
| 3.0 | 19.668* | 15 | |
| NP | 19.027 | 35 | Nobel Biocare® 31168 |
| NP | 19.227 | 35 | Nobel Biocare® 29282 |
| NP | 19.101 | 35 | |
| NP | 19.327 | 35 | |
| NP | 19.627* | 35 | |
| NP AURUMBase® | 19.441 | 35 | |
| RP | 19.030 | 35 | Nobel Biocare® 28815 |
| RP | 19.230 | 35 | Nobel Biocare® 36918 |
| RP | 19.328 | 35 | |
| RP | 19.630* | 35 | |
| RP AURUMBase® | 19.442 | 35 | |
| On1® | 19.021 | 35 | Nobel Biocare® 38751 |
| On1® | 19.221 | 35 | Nobel Biocare® 38750 |
| On1® | 19.621* | 35 | |
| NP on implant for Multi-unit® | 19.507 | 35 | |
| RP on implant for Multi-unit® | 19.508 | 35 | |

**NOBELREPLACE
SELECT™**
TRI-LOBE



| | | | |
|-------------------------------|---------|----|----------------------|
| NP | 19.004 | 35 | Nobel Biocare® 31170 |
| NP | 19.204 | 35 | Nobel Biocare® 36818 |
| NP | 19.304 | 35 | |
| NP | 19.604* | 35 | |
| NP AURUMBase® | 19.404 | 35 | |
| RP/WP/6.0 | 19.005 | 35 | Nobel Biocare® 29293 |
| RP/WP/6.0 | 19.205 | 35 | Nobel Biocare® 29475 |
| RP/WP/6.0 | 19.305 | 35 | |
| RP/WP/6.0 | 19.605* | 35 | |
| RP/WP AURUMBase® | 19.405 | 35 | |
| NP on implant for Multi-unit® | 19.504 | 35 | |
| RP on implant for Multi-unit® | 19.505 | 35 | |

NOBEL BRÄNEMARK®

EXT HEX UNIVERSAL



| PLATFORM SIZE | DESS REF. N° | DESS RECOMMENDED TORQUE (Ncm) | ORIGINAL EQUIVALENT REF. N° |
|-------------------------------|--------------|-------------------------------|-----------------------------|
| NP | 19.027 | 35 | Nobel Biocare® 31168 |
| NP | 19.227 | 35 | Nobel Biocare® 29282 |
| NP | 19.327 | 35 | |
| NP | 19.101 | 35 | |
| NP | 19.627* | 35 | |
| NP AURUMBase® | 19.401 | 35 | |
| RP | 19.028 | 35 | Nobel Biocare® 29290 |
| RP | 19.228 | 35 | Nobel Biocare® 29283 |
| RP | 19.328 | 35 | |
| RP | 19.628* | 35 | |
| RP AURUMBase® | 19.402 | 35 | |
| WP | 19.029 | 35 | Nobel Biocare® 31169 |
| WP | 19.229 | 35 | Nobel Biocare® 29284 |
| WP | 19.329 | 35 | |
| WP | 19.629* | 35 | |
| NP on implant for Multi-unit® | 19.501 | 35 | |
| RP on implant for Multi-unit® | 19.502 | 35 | |

3i CERTAIN®

EXT HEX USA



| | | | |
|-------------------------------|--------|----|-------------------|
| NP/RP/WP | 19.034 | 20 | Biomet 3i® UNIHT |
| NP/RP/WP | 19.634 | 20 | |
| NP/RP/WP AURUMBase® | 19.402 | 20 | |
| RP on implant for Multi-unit® | 19.512 | 20 | |
| Low Profile® Abutment ø4.8 | 19.106 | 10 | Biomet 3i® LPCTSH |

3i OSSEOTITE®

INT HEX CLICK



| | | | |
|----------------------------|--------|----|-------------------|
| NP/RP/WP | 19.011 | 20 | Biomet 3i® IUNIHT |
| NP/RP/WP | 19.311 | 20 | |
| NP/RP/WP | 19.611 | 20 | |
| NP/RP/WP AURUMBase® | 19.438 | 20 | |
| Low Profile® Abutment ø4.8 | 19.106 | 10 | Biomet 3i® LPCTSH |

STRAUMANN® SOFT TISSUE LEVEL & SynOcta®


OCTAGON



| | | | |
|----------------------------|---------|----|-----------------------|
| NNC | 19.070 | 35 | Straumann® AG 048.314 |
| NNC | 19.670 | 35 | |
| RN/WN on implant | 19.026 | 35 | Straumann® AG 048.356 |
| RN/WN on implant | 19.102 | 35 | Straumann® AG 049.181 |
| RN/WN on implant | 19.328 | 35 | |
| RN/WN on implant | 19.626* | 35 | |
| RN/WN AURUMBase® | 19.446 | 35 | |
| RN/WN on synOcta® abutment | 19.009 | 15 | Straumann® AG 048.350 |
| RN/WN on synOcta® abutment | 19.103* | 15 | |
| RN/WN on synOcta® abutment | 19.609* | 15 | |

**STRAUMANN®
BONE LEVEL**

CONICAL BL



| PLATFORM SIZE | DESS REF. N° | DESS RECOMMENDED TORQUE (Ncm) | ORIGINAL EQUIVALENT REF. N° |
|----------------------------------|--------------|-------------------------------|-----------------------------|
| NC on implant | 19.032 | 35 | Straumann® AG 025.2908 |
| NC on implant | 19.632* | 35 | |
| RC on implant | 19.033 | 35 | Straumann® AG 025.4908 |
| RC on implant | 19.633* | 35 | |
| NC/RC on implant | 19.037 | 35 | Straumann® AG 025.4900 |
| NC/RC on implant | 19.104 | 35 | Straumann® AG 025.4906 |
| NC/RC on implant | 19.311 | 20 | |
| NC/RC AURUMBase® | 19.443 | 35 | |
| NC/RC on implant for Multi-unit® | 19.544 | 35 | |
| NC/RC on Multi-base® abutment | 19.041 | 15 | Straumann® AG 025.0900-04 |
| NC/RC on Multi-base® abutment | 19.105 | 15 | |
| NC/RC on SRA® abutment | 19.098* | 15 | Straumann® AG 023.4763 |

**STRAUMANN®
BLX**

CONICAL BLX



| | | | |
|------------------|---------|----|--|
| RB/WB | 19.054 | 35 | |
| RB/WB | 19.700* | 35 | |
| RB/WB AURUMBase® | 19.441 | 35 | |

**NEODENT®
GRAND MORSE®**

NEO GM



| | | | |
|---------------|--------|----|--|
| GM | 19.051 | 20 | |
| GM AURUMBase® | 19.444 | 20 | |

**ZIMMER
SCREW-VENT®**

INT HEX USA



| | | | |
|---------------------------------|----------|----|---------------|
| NP/RP/WP | 19.012 | 30 | Zimmer® URS2 |
| NP/RP/WP | 19.012L* | 30 | |
| NP/RP/WP | 19.042 | 30 | Zimmer® MHLAS |
| NP/RP/WP | 19.642* | 30 | |
| NP/RP/WP | 19.312 | 30 | |
| NP/RP/WP AURUMBase® | 19.417 | 30 | |
| NP (MIS®) | 19.327 | 35 | |
| NP on implant for Multi-unit® | 19.519 | 30 | |
| RP on Multi-unit® abutment ø4.8 | 19.110 | 15 | |
| RP on Multi-unit® abutment ø4.8 | 19.300 | 15 | |

**ASTRA TECH
IMPLANT
SYSTEM™ EV**

CONIC EVO



| PLATFORM SIZE | DESS REF. N° | DESS RECOMMENDED TORQUE (Ncm) | ORIGINAL EQUIVALENT REF. N° |
|-----------------|--------------|-------------------------------|-----------------------------|
| 3.6 on implant | 19.059* | 25 | |
| 3.6 on implant | 19.659* | 25 | |
| 3.6 AURUMBase® | 19.441 | 25 | |
| 4.2 on implant | 19.060* | 25 | |
| 4.2 on implant | 19.660* | 25 | Astra Tech® 25.205 |
| 4.2 AURUMBase® | 19.460 | 25 | |
| 4.8 on implant | 19.061* | 25 | |
| 4.8 on implant | 19.661* | 25 | |
| 4.8 AURUMBase® | 19.461 | 25 | |
| UniAbutment® EV | 19.058 | 15 | |
| UniAbutment® EV | 19.658* | 15 | |

**ASTRA TECH
OSSEOSPEED™**

INT HEX CONIC



| | | | |
|----------------------|---------|----|-----------------|
| NP on implant | 19.015 | 15 | Dentsply® 24189 |
| NP on implant | 19.615* | 15 | |
| RP on implant | 19.016 | 20 | Dentsply® 24449 |
| RP on implant | 19.616* | 20 | |
| RP AURUMBase® | 19.441 | 20 | |
| WP on implant | 19.017 | 25 | Dentsply® 24209 |
| WP on implant | 19.617* | 25 | |
| WP AURUMBase® | 19.425 | 25 | |
| UniAbutment® 20°/45° | 19.018 | 15 | Dentsply® 22435 |
| UniAbutment® 20°/45° | 19.618* | 15 | |

**DENTSPLY
FRIADENT XIVE®**

INT HEX FD







| | | | |
|---------------------|---------|----|------------------|
| NP/RP/WP | 19.024 | 24 | Dentsply® 454305 |
| NP/RP/WP | 19.624* | 24 | |
| NP/RP/WP AURUMBase® | 19.438 | 24 | |

**DENTSPLY
ANKYLOS® C/X**

INT ANK



| | | | |
|---------------|---------|----|--|
| All platforms | 19.048 | 15 | |
| All platforms | 19.050 | 15 | |
| All platforms | 19.648* | 15 | |

| | PLATFORM SIZE | DESS REF. N° | DESS RECOMMENDED TORQUE (Ncm) | ORIGINAL EQUIVALENT REF. N° |
|--|--------------------------------|--------------|-------------------------------|-----------------------------|
| OSSTEM® TS CONIC OSS  | Mini on implant | 19.072 | 20 | |
| | Mini on implant | 19.672* | 20 | |
| | Mini AURUMBase® | 19.444 | 20 | |
| | Standard on implant | 19.073 | 30 | Osstem® GSABSST |
| | Standard on implant | 19.673* | 30 | |
| | Standard AURUMBase® | 19.461 | 30 | |
| CAMLOG® INT CAM  | 3,3 / 3,8 / 4,3 on implant | 19.044 | 20 | |
| | 3,3 / 3,8 / 4,3 on implant | 19.644* | 20 | Camlog® J4005. 1601 |
| | 3,8 / 4,3 AURUMBase® | 19.444 | 20 | |
| | 5.0 on implant | 19.045 | 20 | Camlog® J4005. 2001 |
| | 5.0 on implant | 19.645* | 20 | |
| CONOLOG® INT CON  | 3,3 / 3,8 / 4,3 on implant | 19.074* | 20 | Camlog® C4005. 1601 |
| | 3,3 / 3,8 / 4,3 on implant | 19.674* | 20 | |
| | 5.0 on implant | 19.076* | 20 | Camlog® C4005. 2001 |
| | 5.0 on implant | 19.676* | 20 | |
| BIOHORIZONS® INTERNAL INT HEX BH  | On implant | 19.043 | 30 | BioHorizons® PXAS |
| | On implant | 19.043 | 30 | |
| | Multi-unit® RP ø4.8 | 19.006 | 15 | Nobel Biocare® 29287 |
| | Low Profile® abutment ø4.8 | 19.106 | 10 | Biomet 3i® LPCTSH |
| | Multi-unit® RP ø4.8 | 19.110 | 15 | |
| | Multi-unit® RP ø4.8 | 19.206 | 15 | Nobel Biocare® 29285 |
| | Multi-unit® RP ø4.8 AURUMBase® | 19.306 | 15 | |
| | Multi-unit® RP ø4.8 | 19.606* | 15 | |
| | MIS® Multi-unit® RP ø4.8 | 19.300 | 15 | |
| | Multi-unit® WP ø6.0 | 19.031 | 15 | Nobel Biocare® 31163 |
| | Multi-unit® WP ø6.0 | 19.231 | 15 | Nobel Biocare® 29286 |
| | Multi-unit® WP ø6.0 AURUMBase® | 19.331* | 15 | |
| Multi-unit® WP ø6.0 | 19.631* | 15 | | |

**BIOHORIZONS®
EXTERNAL**

EXT HEX BH



| PLATFORM SIZE | DESS REF. N° | DESS RECOMMENDED TORQUE (Ncm) | ORIGINAL EQUIVALENT REF. N° |
|---------------|--------------|-------------------------------|-----------------------------|
| NP | 19.013* | 30 | BioHorizons® 130-050 |
| NP | 19.312 | 30 | |
| RP/WP | 19.014* | 30 | BioHorizons® 140-050 |
| RP/WP | 19.328 | 35 | |

MIS® SEVEN

INT HEX MI



| | | | |
|------------------|---------|----|---------------|
| NP | 19.056* | 30 | |
| NP | 19.656* | 30 | MIS® MN-S0160 |
| SP/WP | 19.081* | 30 | MIS® MD-S0220 |
| SP/WP | 19.681* | 30 | |
| SP/WP AURUMBase® | 19.417 | 30 | |
| Multi-unit® MIS® | 19.085* | 25 | |
| Multi-unit® MIS® | 19.685* | 25 | MIS® MU-S0220 |

MIS® C1

CONIC MC



| | | | |
|------------------|---------|----|---------------|
| NP | 19.056* | 30 | |
| NP | 19.656* | 30 | MIS® MN-S0160 |
| SP/WP | 19.081* | 30 | MIS® MD-S0220 |
| SP/WP | 19.681* | 30 | |
| Multi-unit® MIS® | 19.085* | 25 | |
| Multi-unit® MIS® | 19.685* | 25 | MIS® MU-S0220 |

MIS® V3

CONIC MV



| | | | |
|------------------|---------|----|---------------|
| NP | 19.056* | 30 | |
| NP | 19.656* | 30 | MIS® MN-S0160 |
| SP | 19.081* | 30 | MIS® MD-S0220 |
| SP | 19.681* | 30 | |
| Multi-unit® MIS® | 19.085* | 25 | |
| Multi-unit® MIS® | 19.685* | 25 | MIS® MU-S0220 |

MEGAGEN AnyRidge®

CONIC ANYR



| | | | |
|--------------------------|---------|----|-----------------|
| All platforms | 19.057 | 35 | |
| All platforms | 19.657* | 35 | Megagen® AANMSF |
| All platforms AURUMBase® | 19.460 | 35 | |

ANTHOGYR AXIOM®
CONIC AXIO



| PLATFORM SIZE | DESS REF. N° | DESS RECOMMENDED TORQUE (Ncm) | ORIGINAL EQUIVALENT REF. N° |
|----------------------|--------------|-------------------------------|-----------------------------|
| On implant | 19.077* | 25 | Anthogyr® OPTS161 |
| On implant | 19.677* | 25 | |
| Multi-unit® abutment | 19.062* | 15 | |
| Multi-unit® abutment | 19.662* | 15 | |

MEDENTIS ICX®
CONIC IC



| | | | |
|----------------------------|---------|----|---------------------------|
| On implant | 19.080* | 30 | Medentis® C-007-000001-01 |
| On implant | 19.680* | 30 | |
| On implant AURUMBase® H2.2 | 19.444 | 30 | |
| On implant AURUMBase® H0.9 | 19.443 | 30 | |

GLOBALD IN-KONE®
CONIC INK



| | | | |
|---------------------------|---------|----|------------------|
| On implant | 19.086* | 15 | GlobalD® DVPCI |
| On implant | 19.686* | 15 | |
| Conical abutment Straight | 19.035* | 15 | GlobalD® DVPIINK |
| Conical abutment Straight | 19.635* | 15 | |
| Conical abutment angled | 19.036* | 15 | |
| Conical abutment angled | 19.636* | 15 | |

DENTIUM SUPERLINE™ & IMPLANTIUM®
CONIC DENT







| | | | |
|-------------|---------|----|-------------------|
| On implant | 19.090* | 30 | Dentium® ASC 2045 |
| On implant | 19.690* | 30 | |
| On abutment | 19.066* | 10 | Dentium® SRS 18T |
| On abutment | 19.666* | 10 | |

BEGO SEMADOS®
INTERNAL SEM



| | | | |
|------------|---------|----|--------------|
| On implant | 19.091* | 30 | Bego® 57.031 |
| On implant | 19.691* | 30 | |

| | PLATFORM SIZE | DESS REF. N° | DESS RECOMMENDED TORQUE (Ncm) | ORIGINAL EQUIVALENT REF. N° |
|--|---------------------------|--------------|-------------------------------|-----------------------------|
| BIOTECH KONTACT® CONIC BIO  | On implant | 19.078* | 20 | Biotech® KVP |
| | On implant | 19.678* | 20 | |
| | Conical abutment Narrow | 19.063* | 20 | |
| | Conical abutment Narrow | 19.663* | 20 | |
| | Conical abutment Standard | 19.064* | 20 | Biotech® KECGMV |
| | Conical abutment Standard | 19.664* | 20 | |
| | | | | |
| BTI® INTERNAL BT  | On implant | 19.079* | 35 | |
| | On implant | 19.679* | 35 | |
| | Multi IM® | 19.065 | 10 | |
| | Multi IM® | 19.665* | 10 | |
| PHIBO® TSH® EXTERNAL HEX PH  | NP AURUMBase® | 19.403* | 35 | |
| | SP/WP AURUMBase® | 19.402 | 35 | |
| MULTI-UNIT  | NP | 19.006 | 15 | |
| | NP | 19.206 | 15 | |
| | NP | 19.606* | 15 | |
| | WP | 19.031 | 15 | |
| | WP | 19.231 | 15 | |
| | WP | 19.631* | 15 | |
| | RP AURUMBase® | 19.306 | 15 | |
| | WP AURUMBase® | 19.631* | 15 | |





 **DESS**
DENTAL SMART SOLUTIONS





All DESS products are manufactured according to ISO 9001 and ISO 13485 with CE marking for all products
Class IIb

All DESS® AURUMBase® screws and screwdrivers are based on the standard ISO 10664
3i® and 3i Certain®, Miniplant®, MicroMiniplant™ and Osseotite® are registered trademarks of 3i Implant Innovations,
USA

ASTRA TECH™, OsseoSpeed™, ANKYLOS® C/X, XiVE®, FRIADENT®, ASTRATECH implant system™ EV and
UniAbutment®

Cerec® are registered trademarks of DENTSPLY SIRONA Implants

BioHorizons® is a registered trademark of BioHorizons, INC.

Brånemark System®, NobelReplace® and Replace Select™, NobelActive™, NobelReplace® CC, NobelSpeedy™ and
Multi-unit® are registered trademarks of Nobel Biocare AB,

Neodent®, Grand Morse®, Straumann® and synOcta® are registered trademarks of Straumann Holding AG,
Switzerland

MIS® is a registered trademark of MIS Implant Technologies Ltd.

Zimmer Screw-Vent® and SwissPlus® are registered trademarks of Zimmer Dental INC, USA

Dyna® is a registered trademark of Dyna Dental Engineering BV

Locator® is a registered trademark of ZEST IP Holdings

Camlog® and Conelog® are registered trademarks of CAMLOG Biotechnologies AG

Megagen® is a registered trademark of MEGAGEN IMPLANT CO. LTD

TORX® is a trademark of ACUMENT INTELLECTUAL PROPERTIES, LLC

Bego Semados® is a registered trademark of BEGO GmbH & Co. KG

Anthogyr® is a registered trademark of Anthogyr SAS

Medentis ICX® is a registered trademark of medentis medical GmbH

Osstem®, Hiossen® is a registered trademark of OSSTEM IMPLANT CO. LTD

Dentium® is a trademark of Dentium Co. Ltd.

GOBALD® is a trademark of Global D SASU.

Biotech Kontakt® is a trademark Biotech Dental SAS.

BTI® is a trademark BTI Biotechnology Institute.

PHIBO® is a trademark PHIBO Dental Solutions S.L.

DESS products can be used only by licensed dentists, physicians and labs.

Please refer ever to the instructions of use available on the website

www.dessdental.com

or supplied with the product.

Some products may not be available in your country. Some of the products are cleared for US and Canada.

Please contact your local distributor for more details.





www.dessdental.com